

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 August 2003 (07.08.2003)

PCT

(10) International Publication Number
WO 03/065394 A2

(51) International Patent Classification⁷: H01G 9/20

(21) International Application Number: PCT/US03/02355

(22) International Filing Date: 24 January 2003 (24.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

10/057,394	25 January 2002 (25.01.2002)	US
60/351,691	25 January 2002 (25.01.2002)	US
60/368,832	29 March 2002 (29.03.2002)	US
60/400,289	31 July 2002 (31.07.2002)	US

David; 31 Coolidge Avenue, Lexington, MA 02420 (US).
ZHENG GUO, Zhu; 2456 Massachusetts Ave., Apt.302,
Cambridge, MA 02140 (US).

(74) Agent: BIANCO, John, V.; Testa, Hurwitz & Thibault,
LLP, High Street Tower, 125 High Street, Boston, MA
02110 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,
VN, YU, ZA, ZM, ZW.

(71) Applicant: KONARKA TECHNOLOGIES, INC.
[US/US]; 100 Foot of John Street-Boott Mill-South, Third
Floor, Lowell, MA 01852 (US).

(72) Inventors: CHITTIBABU, Kethinni; 46C Hampshire
Drive, Nashua, NH 03063 (US). GAUDIANA, Russell;
2 Penrose Lane, Merrimack, NH 03054 (US). HAD-
JIKIRYRIACOU, Savvas, E.; 46 Varney Street, Apt. #
1, Lowell, MA 01854 (US). LEE, Michael; 278 Salem
Road, Billerica, MA 01821 (US). LI, Lian; 733 Wellman
Avenue, N. Chelmsford, MA 01863 (US). BALASUB-
RAMANIAN, Srinii; 201 Main Street, #14, Woburn,
MA 01801 (US). CARDONE, John; 27 Glen Drive, W.
Peabody, MA 01960 (US). HE, Jin-An; 49 East Meadow
Lane, Apt.#37, Lowell, MA 01854 (US). WALLER,

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: PHOTOVOLTAIC CELL COMPONENTS AND MATERIALS

(57) Abstract: A polymeric linking agent enables the manufacture of photovoltaic cells at low temperatures (< about 300 °C) on flexible substrates, including, for example, polymeric substrates. Photovoltaic cells may be fabricated by a relatively simple continuous manufacturing process, for example, a roll-to-roll process, instead of a batch process. Processes and compositions that cause the gelling of liquid electrolytes at relatively low temperatures also facilitate the fabrication of flexible photovoltaic cells. Methods and chemical structures that improve the adhesion of a photovoltaic material to the substrates and that produce mechanically stable nanoparticle formulations are also described. Furthermore, co-sensitizers that co-adsorb with a sensitizing dye to the surface of an interconnected semiconductor oxide nanoparticle material increase the efficiency of photovoltaic cells by improving their charge transfer efficiency and reducing the back transfer of electrons from the interconnected semiconductor oxide nanoparticle material to the sensitizing dye.

WO 03/065394 A2

Photovoltaic Cell Components and Materials

Cross-reference to Related Applications

This application claims the benefits of and priority to U.S. Patent Application Serial No. 10/057,394 filed on January 25, 2002, to U.S. Provisional Patent Application
5 Serial No. 60/351,691 filed on January 25, 2002, to U.S. Provisional Patent Application Serial No. 60/368,832 filed on March 29, 2002, and to U.S. Provisional Patent Application Serial No. 60/400,289 filed on July 31, 2002, all of which are owned by the assignee of the instant application.

Field of the Invention

10 The invention relates generally to the field of photovoltaic devices, and more specifically to chemical structures, components, and materials for fabricating photovoltaic cells.

Background of the Invention

Thin film solar cells composed of percolating networks of liquid electrolyte and
15 dye-coated sintered titanium dioxide were developed by Dr. Michael Grätzel and coworkers at the Swiss Federal Institute of Technology. These photovoltaic devices fall within a general class of cells referred to as dye-sensitized solar cells ("DSSCs"). Conventionally, fabrication of DSSCs requires a high temperature sintering process (> about 400 °C) to achieve sufficient interconnectivity between the nanoparticles and
20 enhanced adhesion between the nanoparticles and a transparent substrate. Although the photovoltaic cells of Grätzel are fabricated from relatively inexpensive raw materials, the high temperature sintering technique used to make these cells limits the cell substrate to rigid transparent materials, such as glass, and consequently limits the manufacturing to batch processes and the applications to those tolerant of the rigid structure. Furthermore,
25 the high temperature sintering process increases the cost of manufacturing a photovoltaic cell due to the energy required to perform the sintering.

To improve the performance of DSSCs, scientists have focused on enhancing molar extinction coefficients, spectral bandwidths, and charge transfer efficiencies of the sensitizing dyes. An effective method to improve the efficiency of charge transfer from
30 the sensitizing dye to the nanoparticles and to reduce back electron transfer from the

nanoparticles to the sensitizing dye has not, as of yet, been demonstrated. Moreover, while DSSCs with a liquid electrolyte have reported solar conversion efficiencies approaching those obtained for silicon and other inorganic photovoltaic cells, the liquid electrolytes are apt to leak, which creates not only environmental issues, but also long-term stability problems.

Summary of the Invention

The invention in, one embodiment, addresses the deficiencies of the prior art by providing a polymeric linking agent that enables the fabrication of thin film solar cells at relatively low temperatures. This enables the manufacture of such cells on flexible substrates, including, for example, those substrates constructed from somewhat heat sensitive polymeric materials. In addition, the invention provides photovoltaic cells and methods of photovoltaic cell fabrication that facilitate their manufacture by a relatively simple, continuous manufacturing process. For example, a roll-to-roll process can be utilized instead of the batch processes that limited the prior art. More particularly, in one embodiment, the invention provides a method for interconnecting metal oxide nanoparticles in DSSCs, with reduced or no heating, using a polymeric linking agent. By way of example, metal oxide nanoparticles may be interconnected by contacting the nanoparticles with a suitable polymeric linking agent dispersed in a solvent, such as n-butanol, at about room temperature or at elevated temperatures below about 300 °C.

The invention, in one embodiment, provides electrolyte compositions and methods of preparing solid or quasi-solid electrolyte compositions that addresses the deficiencies of the prior art. Replacing liquid electrolytes with solid or quasi-solid electrolytes facilitates the production of flexible photovoltaic cells using continuous manufacturing processes, such as roll-to-roll or web processes. Gel electrolytes also contribute to the amelioration of electrolyte leakage and help address the long-term stability problems associated with conventional DSSCs. Furthermore, processes and compositions that cause the gelling of liquid electrolytes at relatively low temperatures, for example, less than about 300 °C or at room temperature, also facilitate the fabrication of flexible photovoltaic cells at those low temperatures.

In various aspects, the gel electrolyte compositions of the invention include appropriate redox active components and small amounts of multiple ligand-containing polymeric and non-polymeric molecules gelled by a metal ion complexing process.

Organic compounds capable of complexing with a metal ion at a plurality of sites (e.g., due to the presence of ligating groups) are used in various embodiments. A given redox component may be a liquid by itself or have solid components dissolved in a liquid solvent. Ligating groups are functional units that contain at least one donor atom rich in electron density, e.g., oxygen, nitrogen, sulfur, phosphorous, among others. Multiple ligating groups, which may be present in non-polymeric material or polymeric material, may occur in either the side chain or part of the material's molecular backbone, in part of a dendrimer, or in a starburst molecule. The introduction of metal ions, and lithium ions in particular, in an ionic liquid electrolyte composition in accord with various aspects of the invention enhances the efficiency of the cells by improving both photocurrent and open circuit voltage. Further, the invention provides photovoltaic cells, electrolyte compositions, gelling compounds, and related methodologies that incorporate gel electrolytes and lithium containing compounds.

The invention, in one embodiment, addresses the deficiencies of the prior art by providing methods and chemical structures that improve the adhesion of a photovoltaic material to a base material during the fabrication of a photovoltaic cell at low temperatures (< about 300 °C). By utilizing flexible, transparent substrates as the base materials, the methods and chemical structures of the invention enhance the performance of thin film solar cells manufactured by continuous manufacturing processes, while also reducing the cost of manufacturing.

The invention, in one embodiment, addresses the deficiencies of the prior art by providing semiconductor oxide formulations, including dye-sensitized, metal-oxide nanoparticle materials that can be coated on flexible, transparent substrates at room temperature. More particularly, in one embodiment, the invention provides mechanically stable, titania nanoparticles that are sufficiently adhered to flexible, transparent substrates, or substrates coated with electrical conductors, upon drying at temperatures between about 50 °C and about 150 °C. The mechanically stable titania nanoparticles enable the fabrication of thin film solar cells at relatively low temperatures and using continuous manufacturing processes.

The invention, in one embodiment, addresses the deficiencies of the prior art by providing a co-sensitizer that enhances the performance of sensitizing dyes. Co-sensitizers are co-adsorbed with the sensitizing dye on the surface of an interconnected

semiconductor oxide nanoparticle material. Co-sensitizers have been demonstrated to increase the efficiency of photovoltaic cells by as much as 17% by improving their charge transfer efficiency and reducing the back transfer of electrons from the interconnected semiconductor oxide nanoparticle material to the sensitizing dye. Co-sensitizers belong to a class of materials that include aromatic amines, carbazoles, and other fused ring analogues that have the ability to donate electrons to an acceptor and form stable cation radicals.

In one aspect, therefore, the invention provides a method of interconnecting nanoparticles at low temperature that includes providing a solution having a polymeric linking agent and a solvent and contacting a plurality of metal oxide nanoparticles with the solution at a temperature below about 300°C, where the solution contains the polymeric linking agent in a concentration sufficient to interconnect at least a portion of the plurality of metal oxide nanoparticles. In various embodiments of the method, the temperature is below about 200°C, below about 100°C, or at about room temperature. In one embodiment, the polymeric linking agent includes a long chain macromolecule. The long chain macromolecule may have a backbone structure substantially similar to the chemical structure of the plurality of metal oxide nanoparticles, and one or more reactive groups chemically bonded to the backbone structure. In another embodiment, the plurality of metal oxide nanoparticles has a chemical structure of the form M_xO_y , where x and y are integers. By way of example, M can include Ti, Zr, W, Nb, Ta, Tb, or Sn.

In one embodiment, the polymeric linking agent is poly(n-butyl titanate). In another embodiment, the solvent of the solution is n-butanol. In various embodiments of the method, the mechanism for interconnecting at least a portion of the plurality of metal oxide nanoparticles is a mechanical or electrical bridge formed by the one or more reactive groups binding to the plurality of metal oxide nanoparticles. The plurality of metal oxide nanoparticles may be disposed, for example, as a thin film on a substrate. In various embodiments of the method, the metal oxide nanoparticles are disposed on the substrate by, for example, dipping the substrate into the solution including the polymeric linking agent, spraying the solution including the polymeric linking agent onto the substrate, or dispersing the solution including the polymeric linking agent on the substrate. In one embodiment, the plurality of metal oxide nanoparticles are dispersed onto the substrate, and then the solution including the polymeric linking agent is

deposited onto the substrate. In another embodiment, the method includes the step of contacting the metal oxide nanoparticles with a modifier solution. In yet another embodiment, the plurality of metal oxide nanoparticles includes nanoparticles of titanium oxides, zirconium oxides, zinc oxides, tungsten oxides, niobium oxides, lanthanum
5 oxides, tantalum oxides, tin oxides, terbium oxides, and one or more combinations thereof.

In another aspect, the invention provides a polymeric linking agent solution including (1) a polymeric linking agent of the formula $-\text{[O-M(OR)}_i\text{]}_m-$; (2) a plurality of metal oxide nanoparticles that have the formula M_xO_y ; and (3) a solvent; where i , m , x ,
10 and y are integers greater than zero. In one embodiment, M is Ti, Zr, Sn, W, Nb, Ta, or Tb. R may be a hydrogen atom, an alkyl, an alkene, an alkyne, an aromatic, or an acyl group. In this embodiment, the solution preferably contains the polymeric linking agent in a concentration sufficient to interconnect at least a portion of the plurality of metal oxide nanoparticles at a temperature below about 300°C . In another embodiment, the
15 polymeric linking agent solution contains the polymeric linking agent in a concentration sufficient to interconnect at least a portion of the plurality of nanoparticles at a temperature below about 100°C . In one embodiment, for example, the polylinker solution is a 1% (by weight) poly(n -butyl titanate) in n -butanol.

In a further aspect, the invention provides a flexible photovoltaic cell including a
20 photosensitized interconnected nanoparticle material and a charge carrier material, both of which are disposed between first and second flexible and significantly light transmitting substrates. The photosensitized interconnected nanoparticle material may include nanoparticles linked by a polymeric linking agent. In one embodiment of the photovoltaic cell, the photosensitized interconnected nanoparticle material includes particles with an
25 average size substantially in the range of about 5 nm to about 80 nm. In another embodiment, the photosensitized interconnected nanoparticle material is interconnected titanium dioxide nanoparticles. The photosensitized interconnected nanoparticle material may be, for example, zirconium oxides, zinc oxides, tungsten oxides, niobium oxides, lanthanum oxides, tantalum oxides, tin oxides, terbium oxides, or one or more
30 combinations thereof. The photosensitized interconnected nanoparticle material may include a photosensitizing agent such as a xanthine, cyanine, merocyanine, phthalocyanine, and/or pyrrole. The photosensitizing agent may include a metal ion, such

as divalent or trivalent metals. The photosensitizing agent may also include at least one of a ruthenium transition metal complex, an osmium transition metal complex, and an iron transition metal complex. In one embodiment of the photovoltaic cell, the charge carrier material includes a redox electrolyte system. In another embodiment, the charge carrier media is a polymeric electrolyte. According to one feature, the charge carrier material transmits at least about 60% of incident visible light.

In one embodiment of the photovoltaic cell, at least one of the first and second flexible, significantly light transmitting substrates includes a transparent substrate (e.g., a polyethylene terephthalate or polyethylene naphthalate material). In another embodiment, the photovoltaic cell includes a catalytic media layer disposed between the first and second flexible, significantly light transmitting substrates. The catalytic media layer is, for example, platinum. In another embodiment, the photovoltaic cell includes an electrical conductor material disposed on at least one of the first and second flexible, significantly light transmitting substrates. In another embodiment, the electrical conductor material is, for example, indium tin oxide.

In one aspect, the invention provides an electrolyte composition adapted for use in a solar cell. The electrolyte composition includes a gelling compound having a metal ion and an organic compound capable of complexing with the metal ion at a plurality of sites. In one embodiment, the organic compound is drawn from the class of polymeric compounds. The metal ion may be lithium. In various embodiments, the organic compound includes, for example, poly(4-vinyl pyridine), poly(2-vinyl pyridine), polyethylene oxide, polyurethanes, polyamides, and/or other suitable compounds. The gelling compound may be a lithium salt having the chemical formula LiX , where X is a suitable anion, such as, for example, a halide, perchlorate, thiocyanate, trifluoromethyl sulfonate, or hexafluorophosphate. In one embodiment, the electrolyte composition includes iodine at a concentration of at least about 0.05 M.

In another aspect, the invention provides an electrolyte solution for use in a solar cell. The electrolyte solution includes a compound of the formula M_iX_j . The i and j variables are ≥ 1 . X is a suitable monovalent or polyvalent anion such as a halide, perchlorate, thiocyanate, trifluoromethyl sulfonate, hexafluorophosphate, sulfate, carbonate, or phosphase, and M is a monovalent or polyvalent metal cation such as Li, Cu, Ba, Zn, Ni, lanthanides, Co, Ca, Al, Mg, or other suitable metals.

In a further aspect, the invention provides a photovoltaic cell including first and second significantly light transmitting substrates, a photosensitized interconnected nanoparticle material, and an electrolyte redox system, where the photosensitized interconnected nanoparticle material and the electrolyte redox system are both disposed between the two substrates of the flexible photovoltaic cell. In one embodiment of the photovoltaic cell, the electrolyte redox system includes a gelling compound that itself includes a metal ion; a polymeric compound capable of complexing with the metal ion at a plurality of sites; and an electrolyte solution. In one embodiment, the metal ion is lithium. In another embodiment, the electrolyte solution includes an imidazolium iodide-based ionic liquid having an iodine concentration of at least 0.05 M and a passivating agent such as t-butylpyridine, methyl-benzimidazole, or other species that have free electron pairs and are capable of adsorbing onto titania.

In another aspect, the invention provides a method of gelling an electrolyte solution for use in a DSSC. The method includes the steps of providing an electrolyte solution and adding to the electrolyte solution a material capable of complexing at a plurality of sites and a metal ion that complexes at those sites. In various embodiments, the steps of this method are performed at a temperature below 50 °C and at standard pressure. The metal ion may be lithium. In one embodiment, the electrolyte solution has a gelling rate controlled by changing a concentration of counter ions in the electrolyte solution. Changing the identity of the anions controls the rate and degree of gelling. For example, the degree of gelling exhibited using iodide is higher than the degree of gelling found with chloride or thiocyanate under given experimental conditions and using an identical lithium ion concentration. Therefore, changing counter ion identity provides a mechanism for changing the gelling rate.

In yet another aspect, the invention provides a method for reducing electron transfer to species within the electrolyte of a solar cell. This method includes the steps of initially providing a photovoltaic cell portion including a dye-sensitized layer and an electrolyte solution including a compound capable of complexing at a plurality of sites. Then, a compound MX is added to the electrolyte solution in sufficient amounts to form a gel electrolyte, where M is an alkali metal and X is a suitable anion such as a halide, perchlorate, thiocyanate, trifluoromethyl sulfonate, or hexafluorophosphate.

Subsequently, the gel electrolyte is incorporated into the photovoltaic cell portion in this aspect of the invention.

In another aspect, the invention provides an electrolyte composition adapted for use in a solar cell. The electrolyte composition includes a mixture including about 90 wt% of an ionic liquid including an imidazolium iodide, from 0 to 10 wt% water, iodine at a concentration of at least 0.05 M, and methyl-benzimidazole. In one embodiment, the imidazoliumiodide-based ionic liquid is selected from butylmethylimidazolium iodide, propylmethylimidazolium iodide, hexylmethylimidazolium iodide, or combinations thereof and the like. The electrolyte composition may include LiCl. In various embodiments, the amount of LiCl is ranges from about 1 wt% LiCl and 6 wt% LiCl, is at least about 1 wt% LiCl, or is less than about 6 wt% LiCl. In another embodiment, the electrolyte composition includes LiI. In various embodiments, the amount of LiI ranges from about 1 wt% LiI and 6 wt% LiI, is at least about 1 wt% LiI, or is less than about 6 wt% LiI.

In one aspect, the invention provides a method of forming a semiconductor oxide nanoparticle layer on a base material. The method includes providing a base material, coating the base material with a primer layer including a semiconductor oxide, and coating a suspension of semiconductor oxide nanoparticles on the primer layer at temperatures below about 300 °C, where the primer layer improves the adhesion of the suspension of semiconductor oxide nanoparticles to the base material. In various embodiments, the temperature is below about 150 °C or is about room temperature. In one embodiment of the method, the primer layer includes a vacuum-coated semiconductor-oxide film. The film may include titanium dioxide in the form of a film or a thin coating of fine particles of a semiconductor oxide. In various embodiments, the thin coating of fine particles of a semiconductor oxide includes titanium dioxide or tin oxide. In one embodiment of the method, the primer layer includes a thin layer of a polylinker solution. The polylinker solution may be a titanium (IV) butoxide polymer or may include a long chain macromolecule. In one embodiment of the method, the base material includes a flexible, significantly light transmitting substrate. The base material may be an electrically conductive material (e.g. indium tin oxide). The base material also may include the electrically conductive material deposited onto a flexible, significantly light transmitting substrate.

In another aspect, the invention provides a flexible photovoltaic cell including a primer layer disposed on a first flexible, significantly light transmitting substrate, a photosensitized interconnected nanoparticle material including a suspension of semiconductor oxide nanoparticles disposed on the primer layer, a charge carrier material, and a second flexible, significantly light transmitting substrate. The primer layer, the photosensitized interconnected nanoparticle material, and the charge carrier material are all disposed between the first and second flexible, significantly light transmitting substrates. In one embodiment of the flexible photovoltaic cell, the photosensitized nanoparticle material includes nanoparticles such as titanium oxides, zirconium oxides, zinc oxides, tungsten oxides, niobium oxides, lanthanum oxides, tin oxides, terbium oxides, tantalum oxides, or one or more combinations thereof. The primer layer may include a vacuum-coated semiconductor-oxide film, preferably a titanium dioxide film. Alternatively, the primer layer may include a thin coating of fine particles of a semiconductor oxide, e.g. titanium dioxide or tin oxide. In yet another embodiment, the primer layer includes a thin layer of a polylinker solution. The polylinker solution may include a long chain macromolecule, or preferably titanium (IV) butoxide polymer. In one embodiment of the flexible photovoltaic cell, an electrically conductive material is disposed on the first flexible, significantly light transmitting substrate. The electrical conductor may be indium tin oxide.

In one aspect, the invention provides a layer formulation for a photovoltaic cell. The formulation includes a nanoparticle material dispersed in a solvent and a polymer binder soluble in the solvent, both disposed on a base material to form a mechanically stable, nanoparticle film. The film may be formed at room temperature, and the formulation may include acetic acid. In one embodiment of the formulation, mechanically stable, nanoparticle film includes a semiconductor oxide. The film may include titanium dioxide nanoparticles. The ratio of the titanium dioxide nanoparticles to the polymer binder may be between about 100:0.1 to about 100:20 by weight, and preferably between about 100:1 to about 100:10 by weight. In one embodiment, the solvent is water; alternatively, the solvent is an organic compound. In various embodiments, the polymer binder is polyvinylpyrrolidone, polyethylene oxide, hydroxyethyl cellulose, ethylcellulose, hydroxypropyl cellulose, or polyvinyl alcohol. The formulation also may include a polymeric linking agent to interconnect the nanoparticle

material. In one embodiment, the base material is a flexible, significantly light transmitting substrate.

In another aspect, the invention provides a method for forming a layer in a photovoltaic cell. The method includes providing a nanoparticle material dispersed in a solvent, dispersing a polymer binder in the solvent, and applying a solution that includes the nanoparticle material and the polymer binder to a base material to form a mechanically stable, nanoparticle film. In one embodiment, the mechanically stable, nanoparticle film may be formed at room temperature. The method also may include the step of drying the base material at a temperature of between about 50 °C and about 150 °C after the solution has been applied.

In a further aspect, the invention provides a flexible photovoltaic cell including (1) a charge carrier material disposed between first and second flexible, significantly light transmitting substrates and (2) a photosensitized interconnected nanoparticle material including a semiconductor-oxide nanoparticle material dispersed in a solvent and a polymer binder soluble in the solvent. The photosensitized interconnected nanoparticle material is applied to the first flexible, significantly light transmitting substrate to complete the cell. The nanoparticle material may include nanoparticles linked by a polymeric linking agent. In one embodiment, the photosensitized interconnected nanoparticle material includes nanoparticles such as titanium oxides, zirconium oxides, zinc oxides, tungsten oxides, niobium oxides, lanthanum oxides, tin oxides, terbium oxides, tantalum oxides, or combinations thereof. The photosensitized interconnected nanoparticle material may include a photosensitizing agent that itself includes a molecule such as, for example, xanthine, cyanine, merocyanine, phthalocyanine, and pyrrole. In one embodiment, the photosensitizing agent also includes a metal ion. The photosensitizing agent may be a ruthenium transition metal complex, an osmium transition metal complex, or an iron transition metal complex. In one embodiment, the charge carrier material includes a redox electrolyte system. The substrate material may be polyethylene terephthalate. In one embodiment, the solvent is water; alternatively, the solvent may be an organic compound. In various embodiments, the polymer binder is polyvinylpyrrolidone, polyethylene oxide, hydroxyethyl cellulose, ethylcellulose, hydroxypropyl cellulose, or polyvinyl alcohol.

In one aspect, the invention provides a photosensitizing agent for a photovoltaic cell, where the photosensitizing agent includes a sensitizing dye for receiving electromagnetic energy and a co-sensitizer that includes a coordinating group for co-adsorbing with the sensitizing dye on a surface of a metal oxide nanoparticle layer. In one embodiment of the photosensitizing agent, the sensitizing dye is *cis*-bis(isothiocyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II). In various embodiments, the co-sensitizer includes either an aromatic amine or a carbazole. For example, the co-sensitizer may include diphenylamino benzoic acid, 2,6 bis (4-benzoicacid)-4-(4-N,N-diphenylamino) phenylpyridine carboxylic acid, or N',N-diphenylaminophenylpropionic acid. In various embodiments of the photosensitizing agent, the coordinating group of the co-sensitizer includes a carboxy derivative, a phosphate group, or a chelating group. The chelating group may be an oxime or an alpha-ketoenolate. The concentration of the co-sensitizer may be below about 50 mol% of the sensitizing dye concentration, e.g., between about 1 mol% and about 20 mol%, and preferably between about 1 mol% and about 5 mol%. The ratio of the concentration of the sensitizing dye to the co-sensitizer may be about 20/1.

In another aspect, the invention provides a photosensitized nanoparticle layer in a photovoltaic cell. The layer includes a sensitizing dye for receiving electromagnetic energy, a co-sensitizer having a coordinating group, and an interconnected nanoparticle material including a surface for co-absorbing the sensitizing dye and the co-sensitizer to form a photosensitized nanoparticle layer. The photosensitized nanoparticle layer may include semiconductor oxide nanoparticles. In still another aspect, the invention provides a method for forming a photosensitized nanoparticle layer in a photovoltaic cell. The method includes providing a sensitizing dye for receiving electromagnetic energy and co-adsorbing a co-sensitizer having a coordinating group on a surface of an interconnected nanoparticle material to form a photosensitized nanoparticle layer. The photosensitized nanoparticle layer may include semiconductor oxide nanoparticles. In one embodiment, the sensitizing dye is *cis*-bis(isothiocyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II). In various embodiments, the co-sensitizer includes either an aromatic amine or a carbazole, e.g., diphenylaminobenzoic acid, 2,6 bis (4-benzoicacid)-4-(4-N,N-diphenylamino) phenylpyridine carboxylic acid, or N',N-diphenylaminophenylpropionic acid. In one embodiment, the concentration of the co-sensitizer is below about 50 mol%

of the sensitizing dye concentration. The concentration of the co-sensitizer may be between about 1 mol% and about 20 mol%, and preferably between about 1 mol% and about 20 mol%. The ratio of the concentration of the sensitizing dye to the co-sensitizer may be about 20/1.

5 In a further aspect, the invention provides a flexible photovoltaic cell including (1) a photosensitized interconnected nanoparticle material that includes (i) a sensitizing dye for receiving electromagnetic energy and (ii) a co-sensitizer having a coordinating group, and (2) a charge carrier material. The sensitizing dye and the co-sensitizer are both adsorbed on a surface of an interconnected nanoparticle material. The charge carrier
10 material and the photosensitized interconnected nanoparticle material are both disposed between first and second flexible, significantly light transmitting substrates. The photosensitized interconnected nanoparticle material may include nanoparticles linked by a polymeric linking agent. In one embodiment of the flexible photovoltaic cell, the photosensitized interconnected nanoparticle material includes particles with an average
15 size substantially in the range of about 10 nm to about 40 nm. The photosensitized interconnected nanoparticle material may be interconnected titanium dioxide nanoparticles, e.g., zirconium oxide, zinc oxide, tungsten oxide, niobium oxide, lanthanum oxide, tin oxides, terbium oxides, tantalum oxides, or one or more combinations thereof. In one embodiment of the flexible photovoltaic cell, the charge
20 carrier material includes a redox electrolyte system. In another embodiment, the charge carrier material is a polymeric electrolyte. According to one feature, the charge carrier material transmits at least about 60% of incident visible light.

In one embodiment of the flexible photovoltaic cell, at least one of the first and second flexible, significantly light transmitting substrates includes a polyethylene
25 terephthalate material. In another embodiment, the flexible photovoltaic cell includes a catalytic media layer disposed between the first and second flexible, significantly light transmitting substrates. The catalytic media layer is, for example, platinum. In another embodiment, the photovoltaic cell includes an electrical conductor material disposed on at least one of the substrates. In another embodiment, the electrical conductor material is,
30 for example, indium tin oxide.

Other aspects and advantages of the invention will become apparent from the following drawings, detailed description, and claims, all of which illustrate the principles of the invention, by way of example only.

Brief Description of the Drawings

5 The foregoing and other objects, features, and advantages of the invention described above will be more fully understood from the following description of various illustrative embodiments, when read together with the accompanying drawings. In the drawings, like reference characters generally refer to the same parts throughout the different views. The drawings are not necessarily to scale, and emphasis instead is
10 generally placed upon illustrating the principles of the invention.

Figure 1 depicts an exemplary chemical structure of an illustrative embodiment of a polylinker for nanoparticles of an oxide of metal M, in accordance with the invention;

Figure 2 depicts another exemplary chemical structure of an illustrative embodiment of a polylinker, according to the invention, for nanoparticles of an oxide of
15 metal M;

Figure 3A shows an exemplary chemical structure for an interconnected nanoparticle film with a polylinker, according to an illustrative embodiment of the invention;

Figure 3B shows the interconnected nanoparticle film of Figure 3A attached to a
20 substrate oxide layer, according to an illustrative embodiment of the invention;

Figure 4 depicts the chemical structure of poly(n-butyl titanate);

Figure 5A shows the chemical structure of a titanium dioxide nanoparticle film interconnected with poly(n-butyl titanate), according to the invention;

Figure 5B shows the interconnected titanium dioxide nanoparticle film of Figure
25 5A attached to a substrate oxide layer, according to an illustrative embodiment of the invention;

Figure 6 is a cross-sectional view of a flexible photovoltaic cell, according to an illustrative embodiment of the invention;

Figure 7 depicts an illustrative embodiment of a continuous manufacturing process
30 that may be used to form the flexible photovoltaic cell shown in Figure 6;

Figure 8 depicts a current-voltage curve for an exemplary solar cell, according to the invention;

Figure 9 shows a current-voltage curve for an exemplary solar cell, according to an illustrative embodiment of the invention;

Figure 10 shows current-voltage curves for two additional exemplary solar cells, according to an illustrative embodiment of the invention;

Figure 11 depicts the chemical structure of gelation induced by a complexing reaction of Li^+ ions with complexable poly(4-vinyl pyridine) compounds, in accordance with an illustrative embodiment of the invention;

Figure 12 shows the chemical structure of a lithium ion complexing with polyethylene oxide segments, according to another illustrative embodiment of the invention;

Figures 13A-13C depict chemical structures for exemplary co-sensitizers, according to illustrative embodiments of the invention;

Figures 14A-14B depict additional exemplary chemical structures of co-sensitizers, according to illustrative embodiments of the invention

Figure 15 shows a graph of the absorbance of the 455 nm cut-off filter (GC455) used to characterize photovoltaic cells according to the invention;

Figure 16 shows a graph of the absorbance of diphenylaminobenzoic acid; and

Figure 17 depicts an illustrative embodiment of the coating of a semiconductor primer layer coating, according to the invention.

Description of the Illustrative Embodiments

A. Low temperature interconnection of nanoparticles

As discussed in the summary above, the invention, in one embodiment, provides a polymeric linking agent (hereinafter a "polylinker") that enables the fabrication of thin film solar cells at relatively low "sintering" temperatures (< about 300 °C). Although the term "sintering" conventionally refers to high temperature (> about 400 °C) processes, as used herein, the term "sintering" is not temperature specific, but instead refers generally to the process of interconnecting nanoparticles at any suitable temperature. In one illustrative embodiment, the invention provides a method for using polylinkers to interconnect nanoparticles in a thin film solar cells. According to another illustrative embodiment, the relatively low temperature sintering process enables the manufacture of such photovoltaic cells using flexible polymer substrates. By employing flexible

substrates, the invention also enables a continuous roll-to-roll or web manufacturing process to be employed.

Figures 1 and 2 schematically depict chemical structures of illustrative polylinkers, according to the invention. The particular polylinker structures depicted are for use with nanoparticles of the formula M_xO_y , where M may be, for example, titanium (Ti), zirconium (Zr), tungsten (W), niobium (Nb), lanthanum (La), tantalum (Ta), terbium (Tb), or tin (Sn) and x and y are integers greater than zero. According to the illustrative embodiment of Figure 1, the polylinker 100 includes a backbone structure 102, which is similar in structure to the metal oxide nanoparticles, and $(OR)_i$ reactive groups, where R may be, for example, acetate, an alkyl, alkene, alkyne, aromatic, or acyl group; or a hydrogen atom and i is an integer greater than zero. Suitable alkyl groups include, but are not limited to, ethyl, propyl, butyl, and pentyl groups. Suitable alkenes include, but are not limited to, ethene, propene, butene, and pentene. Suitable alkynes include, but are not limited to, ethyne, propyne, butyne, and pentyne. Suitable aromatic groups include, but are not limited to, phenyl, benzyl, and phenol. Suitable acyl groups include, but are not limited to, acetyl and benzoyl. In addition, a halogen including, for example, chlorine, bromine, and iodine may be substituted for the $(OR)_i$ reactive groups.

Referring to Figure 2, the polylinker 110 has a branched backbone structure that includes two $-M-O-M-O-M-O-$ backbone structures, which include $(OR)_i$ reactive groups and $(OR)_{i+1}$ reactive groups, where R may be, for example, one of the atoms, molecules, or compounds listed above and i is an integer greater than zero. The two backbone structures have similar structures to the metal oxide nanoparticles. Collectively, the structure depicted in Figure 2 can be represented by $-M(OR)_i-O-(M(OR)_i-O)_n-M(OR)_{i+1}$, where i and n are integers greater than zero.

Figure 3A depicts schematically the chemical structure 300 resulting from interconnecting the M_xO_y nanoparticles 302 with a polylinker 304. In various embodiments, the polylinker 304 has the chemical structure of the polylinkers 100 and 110 depicted in Figures 1 and 2, respectively. According to the illustrative embodiment, the nanoparticles 302 are interconnected by contacting the nanoparticles 302 with a polylinker 304 at or below room temperature or at elevated temperatures that are less than about 300 °C. Preferably, the polylinker 304 is dispersed in a solvent to facilitate contact with the nanoparticles 302. Suitable solvents include, but are not limited to, various

alcohols, chlorohydrocarbons (e.g., chloroform), ketones, cyclic and linear chain ether

derivatives, and aromatic solvents among others. It is believed that the reaction between surface hydroxyl groups of the nanoparticles 302 with alkoxy groups on the polymer chain of the polylinker 304 leads to bridging (or linking) the many nanoparticles 302

5 together through highly stable covalent links, and as a result, to interconnecting the nanoparticles 302. It also is believed that since the polylinker 304 is a polymeric material with a chemical structure similar to that of the nanoparticles 302, even a few binding (or linking) sites between the nanoparticles 302 and the polylinker 304 leads to a highly interconnected nanoparticle film with a combination of electrical and mechanical

10 properties superior to those of a non-sintered or non-interconnected nanoparticle film. The electrical properties include, for example, electron and/or hole conducting properties that facilitate the transfer of electrons or holes from one nanoparticle to another through, for example, π -conjugation. The mechanical properties include, for example, improved flexibility.

15 Still referring to Figure 3A, at low concentrations of the polylinker 304, a single polylinker 304 polymer can link many nanoparticles 302 forming a cross-linked nanoparticle network. However, by increasing the concentration of the polylinker 304 polymer, more polylinker 304 molecules may be attached to the surface of the nanoparticles 302 forming polymer-coated nanoparticles 300. Such polymer-coated
20 nanoparticles 300 may be processed as thin films due to the flexibility of the polymer. It is believed that the electronic properties of the polymer-coated nanoparticles are not affected to a significant extent due to the similar electronic and structural properties between the polylinker polymer and the nanoparticles.

Figure 3B depicts the chemical structure 306 of an illustrative embodiment of the
25 interconnected nanoparticle film 300 from Figure 3A formed on a flexible substrate 308 that includes an oxide layer coating 310, which is an electrical conductor. In particular, the polylinkers may be used to facilitate the formation of such nanoparticle films 300 on flexible, significantly light transmitting substrates 308. As used herein, the term
"significantly light transmitting substrate" refers to a substrate that transmits at least about
30 60% of the visible light incident on the substrate in a wavelength range of operation. Examples of flexible substrates 308 include polyethylene terephthalates (PETs), polyimides, polyethylene naphthalates (PENs), polymeric hydrocarbons, cellulose,

combinations thereof, and the like. PET and PEN substrates may be coated with one or more electrical conducting, oxide layer coatings 310 of, for example, indium tin oxide (ITO), a fluorine-doped tin oxide, tin oxide, zinc oxide, and the like.

According to one preferred embodiment, by using the illustrative polylinkers, the methods of the invention interconnect nanoparticles 302 at temperatures significantly below 400 °C, and preferably below about 300 °C. Operating in such a temperature range enables the use of the flexible substrates 308, which would otherwise be destructively deformed by conventional high temperature sintering methods. In one illustrative embodiment, the exemplary structure 306 is formed by interconnecting the nanoparticles 302 using a polylinker 304 on a substrate 308 at temperatures below about 300 °C. In another embodiment, the nanoparticles 302 are interconnected using a polylinker 304 at temperatures below about 100 °C. In still another embodiment, the nanoparticles 302 are interconnected using a polylinker 304 at about room temperature and room pressure, from about 18 to about 22 °C and about 760 mm Hg, respectively.

In embodiments where the nanoparticles are deposited on a substrate, the reactive groups of the polylinker bind with the substrate, substrate coating and/or substrate oxide layers. The reactive groups may bind to the substrate, substrate coating and/or substrate oxide layers by, for example, covalent, ionic and/or hydrogen bonding. It is believed that reactions between the reactive groups of the polylinker with oxide layers on the substrate result in connecting nanoparticles to the substrate via the polylinker.

According to various embodiments of the invention, metal oxide nanoparticles are interconnected by contacting the nanoparticles with a suitable polylinker dispersed in a suitable solvent at or below room temperature or at elevated temperatures below about 300 °C. The nanoparticles may be contacted with a polylinker solution in many ways.

For example, a nanoparticle film may be formed on a substrate and then dipped into a polylinker solution. A nanoparticle film may be formed on a substrate and the polylinker solution sprayed on the film. The polylinker and nanoparticles may be dispersed together in a solution and the solution deposited on a substrate. To prepare nanoparticle dispersions, techniques such as, for example, microfluidizing, attritting, and ball milling may be used. Further, a polylinker solution may be deposited on a substrate and a nanoparticle film deposited on the polylinker.

In embodiments where the polylinker and nanoparticles are dispersed together in a solution, the resultant polylinker-nanoparticle solution may be used to form an interconnected nanoparticle film on a substrate in a single step. In various versions of this embodiment, the viscosity of the polylinker-nanoparticle solution may be selected to facilitate film deposition using printing techniques such as, for example, screen-printing and gravure-printing techniques. In embodiments where a polylinker solution is deposited on a substrate and a nanoparticle film deposited on the polylinker, the concentration of the polylinker can be adjusted to achieve a desired adhesive thickness. In addition, excess solvent may be removed from the deposited polylinker solution prior to deposition of the nanoparticle film.

The invention is not limited to interconnection of nanoparticles of a material of formula M_xO_y . Suitable nanoparticle materials include, but are not limited to, sulfides, selenides, tellurides, and oxides of titanium, zirconium, lanthanum, niobium, tin, tantalum, terbium, and tungsten, and combinations thereof. For example, TiO_2 , $SrTiO_3$, $CaTiO_3$, ZrO_2 , WO_3 , La_2O_3 , Nb_2O_5 , SnO_2 , sodium titanate, and potassium niobate are suitable nanoparticle materials.

The polylinker may contain more than one type of reactive group. For example, the illustrative embodiments of Figures 1-3B depict one type of reactive group OR. However, the polylinker may include several types of reactive groups, e.g., OR, OR', OR'', etc.; where R, R' and R'' are one or more of a hydrogen, alkyl, alkene, alkyne, aromatic, or acyl group or where one or more of OR, OR', and OR'' are a halide. For example, the polylinker may include polymer units of formulas such as, $-[O-M(OR)_i(OR')_j-]$, and $-[O-M(OR)_i(OR')_j(OR'')_k-]$, where i, j and k are integers greater than zero.

Figure 4 depicts the chemical structure of a representative polylinker, poly(n-butyl titanate) 400 for use with titanium dioxide (TiO_2) nanoparticles. Suitable solvents for poly(n-butyl titanate) 400 include, but are not limited to, various alcohols, chlorohydrocarbons (e.g., chloroform), ketones, cyclic and linear chain ether derivatives, and aromatic solvents among others. Preferably, the solvent is n-butanol. The poly(n-butyl titanate) polylinker 400 contains a branched $-Ti-O-Ti-O-Ti-O-$ backbone structure with butoxy (OBu) reactive groups.

Figure 5A depicts the chemical structure of a nanoparticle film 500, which is constructed from titanium dioxide nanoparticles 502 interconnected by poly(n-butyl titanate) polylinker molecules 504. It is believed that the reaction between surface hydroxyl groups of the TiO₂ nanoparticles 502 with butoxy groups 506 (or other alkoxy groups) of the polylinker 504 leads to the bridging (or linking) of many nanoparticles 502 together through highly stable covalent links, and as a result, interconnecting the nanoparticles 502. Furthermore, it is believed that since the polylinker 504 is a polymeric material with a chemical structure similar to that of TiO₂, even a few binding (or linking) sites between nanoparticles 502 and polylinker 504 will lead to a highly interconnected nanoparticle film 500, with electronic and mechanical properties superior to those of a non-sintered or non-interconnected nanoparticle film.

Figure 5B depicts the chemical structure 508 of the nanoparticle film 500 from Figure 5A formed on a substrate 510, which includes an electrically-conducting oxide layer coating 512, by applying the polylinker solution to the substrate 510 and then depositing the nanoparticles 502 on the polylinker 504. In the illustrative example using titanium dioxide nanoparticles 502, a polylinker solution including poly(n-butyl titanate) 504 is dissolved in n-butanol and applied to the substrate 510. The concentration of the polylinker 504 can be adjusted to achieve a desired adhesive thickness for the polylinker solution. A titanium dioxide nanoparticulate film 500 is then deposited on the polylinker coated substrate 510. Reaction between the surface hydroxyl groups of the TiO₂ nanoparticles with reactive butoxy groups 506 (or other alkoxy groups) of poly(n-butyl titanate) 504 results in interconnecting the nanoparticles 502, as well as connecting nanoparticles 502 with the oxide layers 512 on the substrate 510.

Figure 6 depicts a flexible photovoltaic cell 600, in accordance with the invention, that includes a photosensitized interconnected nanoparticle material 603 and a charge carrier material 606 disposed between a first flexible, significantly light transmitting substrate 609 and a second flexible, significantly light transmitting substrate 612. In one embodiment, the flexible photovoltaic cell further includes a catalytic media layer 615 disposed between the first substrate 609 and second substrate 612. Preferably, the photovoltaic cell 600 also includes an electrical conductor 618 deposited on one or both of the substrates 609 and 612. The methods of nanoparticle interconnection provided

herein enable construction of the flexible photovoltaic cell 600 at temperatures and heating times compatible with such substrates 609 and 612.

The flexible, significantly light transmitting substrates 609 and 612 of the photovoltaic cell 600 preferably include polymeric materials. Suitable substrate materials include, but are not limited to, PET, polyimide, PEN, polymeric hydrocarbons, cellulose, or combinations thereof. Further, the substrates 609 and 612 may include materials that facilitate the fabrication of photovoltaic cells by a continuous manufacturing process such as, for example, a roll-to-roll or web process. The substrate 609 and 612 may be colored or colorless. Preferably, the substrates 609 and 612 are clear and transparent. The substrates 609 and 612 may have one or more substantially planar surfaces or may be substantially non-planar. For example, a non-planar substrate may have a curved or stepped surface (e.g., to form a Fresnel lens) or be otherwise patterned.

According to the illustrative embodiment, an electrical conductor 618 is deposited on one or both of the substrates 609 and 612. Preferably, the electrical conductor 618 is a significantly light transmitting material such as, for example, ITO, a fluorine-doped tin oxide, tin oxide, zinc oxide, or the like. In one illustrative embodiment, the electrical conductor 618 is deposited as a layer between about 100 nm and about 500 nm thick. In another illustrative embodiment, the electrical conductor 618 is between about 150 nm and about 300 nm thick. According to a further feature of the illustrative embodiment, a wire or lead line may be connected to the electrical conductor 618 to electrically connect the photovoltaic cell 600 to an external load.

The photosensitized interconnected nanoparticle material 603 may include one or more types of metal oxide nanoparticles, as described in detail above. In one embodiment, the photosensitized interconnected nanoparticle material 603 includes nanoparticles with an average size of between about 2 nm and about 100 nm. In another embodiment, the photosensitized nanoparticle material 603 includes nanoparticles with an average size of between about 10 nm and about 40 nm. Preferably, the nanoparticles are titanium dioxide particles having an average particle size of about 20 nm.

A wide variety of photosensitizing agents may be applied to and/or associated with the nanoparticles to produce the photosensitized interconnected nanoparticle material 603. The photosensitizing agent facilitates conversion of incident visible light into electricity to produce the desired photovoltaic effect. It is believed that the photosensitizing agent

absorbs incident light resulting in the excitation of electrons in the photosensitizing agent.

The energy of the excited electrons is then transferred from the excitation levels of the photosensitizing agent into a conduction band of the interconnected nanoparticles 603.

This electron transfer results in an effective separation of charge and the desired

5 photovoltaic effect. Accordingly, the electrons in the conduction band of the interconnected nanoparticles are made available to drive an external load electrically connected to the photovoltaic cell.

In one illustrative embodiment, the photosensitizing agent is sorbed (e.g., chemisorbed and/or physisorbed) on the interconnected nanoparticles 603. The
10 photosensitizing agent may be sorbed on the surfaces of the interconnected nanoparticles 603, throughout the interconnected nanoparticles 603, or both. The photosensitizing agent is selected, for example, based on its ability to absorb photons in a wavelength range of operation, its ability to produce free electrons (or electron holes) in a conduction band of the interconnected nanoparticles 603, and its effectiveness in complexing with or
15 sorbing to the interconnected nanoparticles 603. Suitable photosensitizing agents may include, for example, dyes that include functional groups, such as carboxyl and/or hydroxyl groups, that can chelate to the nanoparticles, e.g., to Ti(IV) sites on a TiO₂ surface. Examples of suitable dyes include, but are not limited to, anthocyanins, porphyrins, phthalocyanines, merocyanines, cyanines, squarates, eosins, and
20 metal-containing dyes such as, for example, *cis*-bis(isothiocyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II) ("N3 dye"); tris(isothiocyanato)-ruthenium(II)-2,2':6',2''-terpyridine-4,4',4''-tricarboxylic acid; *cis*-bis(isothiocyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II) bis-tetrabutylammonium; *cis*-bis(isocyanato) (2,2'-bipyridyl-4,4' dicarboxylato) ruthenium (II); and tris(2,2'-bipyridyl-4,4'-dicarboxylato) ruthenium
25 (II) dichloride, all of which are available from Solaronix.

The charge carrier material 606 portion of the photovoltaic cells may form a layer in the photovoltaic cell, be interspersed with the material that forms the photosensitized interconnected nanoparticle material 603, or be a combination of both. The charge carrier material 606 may be any material that facilitates the transfer of electrical charge from a
30 ground potential or a current source to the interconnected nanoparticles 603 (and/or a photosensitizing agent associated therewith). A general class of suitable charge carrier materials can include, but are not limited to solvent based liquid electrolytes,

polyelectrolytes, polymeric electrolytes, solid electrolytes, n-type and p-type transporting materials (e.g., conducting polymers), and gel electrolytes, which are described in more detail below.

Other choices for the charge carrier material 606 are possible. For example, the electrolyte composition may include a lithium salt that has the formula LiX , where X is an iodide, bromide, chloride, perchlorate, thiocyanate, trifluoromethyl sulfonate, or hexafluorophosphate. In one embodiment, the charge carrier material 606 includes a redox system. Suitable redox systems may include organic and/or inorganic redox systems. Examples of such systems include, but are not limited to, cerium(III) sulfate/cerium(IV), sodium bromide/bromine, lithium iodide/iodine, $\text{Fe}^{2+}/\text{Fe}^{3+}$, $\text{Co}^{2+}/\text{Co}^{3+}$, and viologens. Furthermore, an electrolyte solution may have the formula M_iX_j , where i and j are ≥ 1 . X is an anion, and M is selected from the group consisting of Li, Cu, Ba, Zn, Ni, lanthanides, Co, Ca, Al, and Mg. Suitable anions include, but are not limited to, chloride, perchlorate, thiocyanate, trifluoromethyl sulfonate, and hexafluorophosphate.

In some illustrative embodiments the charge carrier material 606 includes a polymeric electrolyte. In one version, the polymeric electrolyte includes poly(vinyl imidazolium halide) and lithium iodide. In another version, the polymeric electrolyte includes poly(vinyl pyridinium salts). In still another embodiment, the charge carrier material 606 includes a solid electrolyte. In one version, the solid electrolyte includes lithium iodide and pyridinium iodide. In another version, the solid electrolyte includes substituted imidazolium iodide.

According to some illustrative embodiments, the charge carrier material 606 includes various types of polymeric polyelectrolytes. In one version, the polyelectrolyte includes between about 5% and about 100% (e.g., 5-60%, 5-40%, or 5-20%) by weight of a polymer, e.g., an ion-conducting polymer, about 5% to about 95%, e.g., about 35-95%, 60-95%, or 80-95%, by weight of a plasticizer and about 0.05 M to about 10 M of a redox electrolyte, e.g., about 0.05 M to about 10 M, e.g., 0.05-2 M, 0.05-1 M, or 0.05-0.5 M, of organic or inorganic iodides, and about 0.01 M to about 1 M, e.g., 0.05-5 M, 0.05-2 M, or 0.05-1 M, of iodine. The ion-conducting polymer may include, for example, polyethylene oxide (PEO), polyacrylonitrile (PAN), polymethylmethacrylate (acrylic) (PMMA), polyethers, and polyphenols. Examples of suitable plasticizers include, but are not limited

to, ethyl carbonate, propylene carbonate, mixtures of carbonates, organic phosphates, butyrolactone, and dialkylphthalates.

Preferably, the flexible photovoltaic cell 600 also includes a catalytic media layer 615 disposed between the substrates 609 and 612. According to the illustrative embodiment, the catalytic media layer 615 is in electrical contact with the charge carrier material 606. The catalytic media 615 may include, for example, ruthenium, osmium, cobalt, rhodium, iridium, nickel, activated carbon, palladium, platinum, or hole transporting polymers (e.g., poly(3,4-ethylene dioxythiophene and polyaniline). Preferably, the catalytic media 615 further includes titanium, or some other suitable metal, to facilitate adhesion of the catalytic media to a substrate and/or substrate coating. Preferably, the titanium is deposited in regions or a layer about 10 Å thick. In one embodiment, the catalytic media 615 includes a platinum layer between about 13 Å and about 35 Å thick. In another embodiment, the catalytic media 615 includes a platinum layer between about 15 Å and about 50 Å thick. In another embodiment, the catalytic media 615 includes a platinum layer between about 50 Å and about 800 Å thick. Preferably, the catalytic media 615 includes a platinum layer about 25 Å thick.

In another aspect, the invention also provides methods of forming a layer of interconnected metal oxide nanoparticles on a substrate using a continuous manufacturing process, such as, for example, a roll-to-roll or web process. These methods may be used, for example, to produce DSSCs. The current processes for producing DSSCs in large numbers, for example using a continuous and cost effective assembly line process, are extremely difficult at best. The difficulties associated with a continuous assembly process for a DSSC may arise from the cell support or substrate, which is generally rigid and typically includes thermally resistant materials such as glass and metal. The primary reason for this is related to the high temperature sintering process for producing fused nanocrystals (typically about 400-500 °C). Rigid substrate materials, by their very nature, generally do not lend themselves to a continuous process for manufacture, but rather to a more expensive batch process.

Figure 7 depicts an illustrative embodiment of a continuous manufacturing process 700 that may be used to form the photovoltaic cell shown in Figure 6. According to the illustrative embodiment, an interconnected nanoparticle film is formed on an advancing substrate sheet 705, which may be continuously advanced, periodically advanced, and/or

irregularly advanced during a manufacturing run using rollers 708. In this illustrative

embodiment, the electrical conductor material 710, which serves as the basis for one electrode of a photovoltaic cell, is deposited on the advancing substrate 705. In various embodiments, the electrical conductor material 710 may be deposited on a target region of the substrate 705 by thermal evaporation or low temperature sputtering. In addition, the electrical conductor material 710 may be deposited, for example, by vacuum deposition.

According to the illustrative embodiment shown in Figure 7, the photosensitized nanoparticle material 715 is then deposited. As described above, the photosensitized nanoparticle material 715 may be formed by applying a solution having a polylinker and metal oxide nanoparticles onto the advancing substrate sheet 705. The polylinker-nanoparticle solution may be applied by any suitable technique including, but not limited to, dip tanks, extrusion coating, spray coating, screen printing, and gravure printing. In other illustrative embodiments, the polylinker solution and metal oxide nanoparticles are separately applied to the advancing substrate sheet 705 to form the photosensitized nanoparticle material 715. In one illustrative embodiment, the polylinker solution is applied to the advancing substrate 705 and the metal oxide nanoparticles (preferably dispersed in a solvent) are disposed on the polylinker. In another illustrative embodiment, the metal oxide nanoparticles (preferably dispersed in a solvent) are applied to the advancing substrate 705 and the polylinker solution is applied to the nanoparticles to form the photosensitized nanoparticle material 715. As described above with regard to Figure 6, a wide variety of photosensitizing agents may be applied to and/or associated with the nanoparticles to produce the photosensitized nanoparticle material 715.

After deposition of the photosensitized nanomatrix material 715, the substrate sheet 705 may proceed to further processing stations depending on the ultimate product desired. According to this illustrative embodiment, the charge carrier material 720, which facilitates the transfer of electrical charge from a ground potential or a current source to the photosensitized nanoparticle material 715, is deposited. The charge carrier material 720 may be applied by, for example, spray coating, roller coating, knife coating, or blade coating. The charge carrier media 720 may be prepared by forming a solution having an ion-conducting polymer, a plasticizer, and a mixture of iodides and iodine. The polymer provides mechanical and/or dimensional stability; the plasticizer helps the gel/liquid phase transition temperature; and the iodides and iodine act as redox electrolytes.

Still referring to Figure 7, the catalytic media layer 725, which facilitates the transfer of electrons ejected by the photoexcited molecules within the photovoltaic cell, is then deposited. Subsequently, a second electrical conductor layer 730 is deposited. The second electrical conductor layer 730 serves as the basis for a second electrode of the photovoltaic cell. A second, flexible substrate 735 is then unwound and applied to the advancing sheet 705 to complete the photovoltaic cell using the continuous manufacturing process 700.

Further illustrative examples of the invention in the context of a DSSC including titanium dioxide nanoparticles are provided below. The following examples are illustrative and not intended to be limiting. Accordingly, it is to be understood that the invention may be applied to a wide range of nanoparticles including, but not limited to, SrTiO_3 , CaTiO_3 , ZrO_2 , WO_3 , La_2O_3 , Nb_2O_5 , sodium titanate, and potassium niobate nanoparticles. In addition, it should be realized that the invention is generally applicable to formation of interconnected nanoparticles for a wide variety of applications in addition to DSSC, such as, for example, metal oxide and semiconductor coatings.

Example 1. Dip-Coating Application of Polylinker

In this illustrative example, a DSSC was formed as follows. A titanium dioxide nanoparticle film was coated on a $\text{SnO}_2\text{:F}$ coated glass slide. The polylinker solution was a 1% (by weight) solution of the poly(n-butyl titanate) in n-butanol. In this embodiment, the concentration of the polylinker in the solvent was preferably less than 5% by weight. To interconnect the particles, the nanoparticle film coated slide was dipped in the polylinker solution for 15 minutes and then heated at 150 °C for 30 minutes. The polylinker treated TiO_2 film was then photosensitized with a 3×10^{-4} N3 dye solution for 1 hour. The polylinker treated TiO_2 film coated slide was then fabricated into a 0.6 cm^2 photovoltaic cell by sandwiching a triiodide based liquid redox electrolyte between the TiO_2 film coated slide a platinum coated $\text{SnO}_2\text{:F}$ glass slide using 2 mil SURLYN 1702 hot melt adhesive available from DuPont. The platinum coating was approximately 60 nm thick. The cell exhibited a solar conversion efficiency of as high as 3.33% at AM 1.5 solar simulator conditions (i.e., irradiation with light having an intensity of 1000 W/m^2). The completed solar cells exhibited an average solar conversion efficiency ("η") of 3.02%; an average open circuit voltage ("V_{oc}") of 0.66 V; an average short circuit current

WO 03/065394
("I_{sc}") of 8.71 mA/cm², and an average fill factor of 0.49 (0.48 to 0.52). PCT/US03/02355
a graph 800 that shows the current-voltage curve 802 for the dip-coated photovoltaic cell.

Example 2. Polylinker-Nanoparticle Solution Application

In this illustrative example, a 5.0 mL suspension of titanium dioxide (P25, which is a titania that includes approximately 80% anatase and 20% rutile crystalline TiO₂ nanoparticles and which is available from Degussa-Huls) in n-butanol was added to 0.25 g of poly(n-butyl titanate) in 1 mL of n-butanol. In this embodiment, the concentration of the polylinker in the polylinker-nanoparticle solution was preferably less than about 50% by weight. The viscosity of the suspension changed from milk-like to toothpaste-like with no apparent particle separation. The paste was spread on a patterned SnO₂:F coated glass slide using a Gardner knife with a 60 µm thick tape determining the thickness of wet film thickness. The coatings were dried at room temperature forming the films. The air-dried films were subsequently heat treated at 150 °C for 30 minutes to remove solvent, and sensitized overnight with a 3 x 10⁻⁴ M N3 dye solution in ethanol. The sensitized photoelectrodes were cut into desired sizes and sandwiched between a platinum (60 nm thick) coated SnO₂:F coated glass slide and a tri-iodide based liquid electrolyte. The completed solar cells exhibited an average η of 2.9% (2.57% to 3.38%) for six cells at AM 1.5 conditions. The average V_{oc} was 0.68 V (0.66 to 0.71 V); the average I_{sc} was 8.55 mA/cm² (7.45 to 10.4 mA/cm²); and the average fill factor was 0.49 (0.48 to 0.52). Figure 9 depicts a graph 900 showing the current-voltage curve 902 for the photovoltaic cell formed from the polylinker-nanoparticle solution.

Example 3. DSSC Cells Formed Without Polylinker

In this illustrative example, an aqueous titanium dioxide suspension (P25) containing about 37.5 % solid content was prepared using a microfluidizer and was spin coated on a fluorinated SnO₂ conducting electrode (15 Ω/cm²) that was itself coated onto a coated glass slide. The titanium dioxide coated slides were air dried for about 15 minutes and heat treated at 150 °C for 15 minutes. The slides were removed from the oven, cooled to about 80 °C, and dipped into 3 x 10⁻⁴ M N3 dye solution in ethanol for about 1 hour. The sensitized titanium dioxide photoelectrodes were removed from dye solution rinsed with ethanol and dried over a slide warmer at 40 °C. The sensitized photoelectrodes were cut into small pieces (0.7 cm x 0.5-1 cm active area) and sandwiched between platinum coated SnO₂:F-transparent conducting glass slides. A

liquid electrolyte containing 1 M LiI, 0.05 M iodine, and 1 M t-butyl pyridine in 3-

methoxybutyronitrile was applied between the photoelectrode and platinized conducting electrode through capillary action. Thus constructed photocells exhibited an average solar conversion efficiency of about 3.83 % at AM 1.5 conditions. The η at AM 1.5 conditions and the photovoltaic characteristics I_{sc} , V_{oc} , voltage at maximum power output (" V_m "), and current at maximum power output (" I_m ") of these cells are listed in Table 1 under column A. Figure 10 depicts a graph 1000 showing the current-voltage curve 1002 for the photovoltaic cell formed without the polylinker.

Table 1

	A	B	C	D	E
	Untreated	0.1 % poly- mer soln.	0.4 % poly- mer soln.	1 % poly- mer soln.	2 % poly- mer soln.
η (%)	Avg = 3.83 (3.37-4.15)	Avg = 4.30 (4.15-4.55)	Avg = 4.55 (4.4-4.82)	Avg = 4.15 (3.48-4.46)	Avg = 4.15 (3.7-4.58)
I_{sc} (mA/cm ²)	Avg = 10.08 (8.88-10.86)	Avg = 10.96 (10.44-11.5)	Avg = 10.60 (9.79-11.12)	Avg = 11.00 (10.7-11.28)	Avg = 11.24 (10.82-11.51)
V_{oc} (V)	Avg = 0.65 (0.65-0.66)	Avg = 0.66 (0.6-0.7)	Avg = 0.71 (0.69-0.74)	Avg = 0.7 (0.69-0.71)	Avg = 0.69 (0.68-0.71)
V_m (V)	Avg = 0.454 (0.43-0.49)	Avg = 0.46 (0.43-0.477)	Avg = 0.50 (0.47-0.53)	Avg = 0.45 (0.4-0.47)	Avg = 0.44 (0.42-0.46)
I_m (mA/cm ²)	Avg = 8.4 (7.5-8.96)	Avg = 9.36 (8.75-9.71)	Avg = 9.08 (8.31-9.57)	Avg = 9.14 (8.70-9.55)	Avg = 9.28 (8.66-9.97)

Example 4. DSSC Cells Formed With Various Concentrations of Polylinker Solution

In this illustrative example, a P25 suspension containing about 37.5 % solid content was prepared using a microfluidizer and was spin coated on fluorinated SnO₂ conducting electrode (15 Ω /cm²) coated glass slide. The titanium dioxide coated slides were air dried for about 15 minutes and heat treated at 150 °C for 15 minutes. The titanium dioxide coated conducting glass slide were dipped into a polylinker solution including poly(n-butyl titanate) in n-butanol for 5 minutes in order to carry out interconnection (polylinking) of nanoparticles. The polylinker solutions used were 0.1 wt% poly(n-butyl titanate), 0.4 wt% poly(n-butyl titanate), 1 wt% poly(n-butyl titanate), and 2 wt% poly(n-butyl titanate). After 5 minutes, the slides were removed from the polylinker solution, air dried for about 15 minutes and heat treated in an oven at 150 °C

for 15 minutes to remove solvent. The slides were removed from the oven, cooled to about 80 °C, and dipped into 3×10^{-4} M N3 dye solution in ethanol for about 1 hour. The sensitized titanium dioxide photoelectrodes were removed from dye solution, rinsed with ethanol, and dried over a slide warmer at 40 °C. The sensitized photoelectrodes were cut into small pieces (0.7 cm x 0.5-1 cm active area) and sandwiched between platinum coated SnO₂:F-transparent conducting glass slides. A liquid electrolyte containing 1 M LiI, 0.05 M iodine, and 1 M t-butyl pyridine in 3-methoxybutyronitrile was applied between the photoelectrode and platinized conducting electrode through capillary action. The η at AM 1.5 conditions and the photovoltaic characteristics I_{sc} , V_{oc} , V_m , and I_m of the constructed cells are listed in Table 1 for the 0.1 wt% solution under column B, for the 0.4 wt% solution under column C, for the 1 wt% solution under column D, and for the 2 wt% solution under column E. Figure 10 depicts the current-voltage curve 1008 for the photovoltaic cell formed with the polylinker.

Example 5. Modifier Solutions

In this illustrative example, titanium dioxide coated transparent conducting oxide coated glass slides were prepared by spin coating process as described in Example 4. The titanium oxide coated conducting glass slides were treated with polylinker solution including a 0.01 M poly(n-butyl titanate) solution in n-butanol for 5 minutes to interconnect the nanoparticles. The slides were air dried for about 5 minutes after removing from the polylinker solution. The slides were later dipped into a modifier solution for about 1 minute. The modifier solutions used were 1:1 water/ethanol mixture, 1 M solution of t-butyl pyridine in 1:1 water/ethanol mixture, 0.05 M HCl solution in 1:1 water/ethanol mixture. One of the slides was treated with steam from humidifier for 15 seconds. The slides were air dried for 15 minutes and heat-treated at 150 °C for 15 minutes to remove solvent and then sensitized with a 3×10^{-4} M N3 dye solution for 1 hour. The sensitized photoelectrodes were sandwiched between platinized SnO₂:F coated glass slides and studied for photovoltaic characteristics using a liquid electrolyte containing 1 M LiI, 0.05 M iodine, and 1 M t-butyl pyridine in 3-methoxybutyronitrile. Acid seems to help in increasing the photoconductivity and efficiency of these photocells. The η at AM 1.5 conditions and the photovoltaic characteristics of the cells of this example are listed in Table 2 as follows: slides not dipped into a modifier solution and not treated with polylinker solution (column A); slides not dipped into a modifier, but treated

with polylinker solution (column B); slides were first treated with polylinker solution and then dipped in 1:1 water/ethanol mixture (column C); slides were first treated with polylinker solution and then dipped in 1 M solution of t-butyl pyridine in 1:1 water/ethanol mixture (column D); slides were first treated with polylinker solution and then dipped in 0.05 M HCl solution in 1:1 water/ethanol mixture (column E); and slides were first treated with polylinker solution and then treated with steam from humidifier (column F).

Table 2

	A	B	C	D	E	F
	Untreated	Treated with 0.01M TiBut	Treated with 1:1 EtOH/H ₂ O	Treated with 1M t-BuPy/1:1 EtOH/H ₂ O	Treated with 0.05M HCl/1:1 EtOH/H ₂ O	Steam from Humidifier for 15 sec.
10						
15	η (%)	Avg = 3.92 (3.75-4.15)	Avg = 4.41 (4.12-4.74)	Avg = 4.11 (4.06-4.15)	Avg = 4.34 (4.27-4.38)	Avg = 4.67 (4.61-4.73)
20	V_{oc} (V)	Avg = 0.66 (0.66-0.67)	Avg = 0.66 (0.65-0.66)	Avg = 0.65 (0.64-0.65)	Avg = 0.65 (0.64-0.66)	Avg = 0.66 (0.65-0.66)
25	I_{sc} (mA/cm ²)	Avg = 9.97 (9.48-10.56)	Avg = 12.57 (11.7-13.22)	Avg = 11.85 (11.21-12.49)	Avg = 11.85 (11.21-12.49)	Avg = 12.51 (12.15-12.87)
30	V_m (V)	Avg = 0.468 (0.46-0.48)	Avg = 0.434 (0.4-0.457)	Avg = 0.44 (0.43-0.45)	Avg = 0.45 (0.44-0.456)	Avg = 0.457 (0.453-0.46)
	I_m (mA/cm ²)	Avg = 8.36 (7.85-8.89)	Avg = 10.08 (9.57-10.37)	Avg = 9.27 (9.01-9.53)	Avg = 9.52 (9.22-9.75)	Avg = 10.23 (10.17-10.29)

Example 6. Post-Interconnection Heating to 150 °C

In this illustrative example, a titanium-dioxide-coated, transparent-conducting-oxide-coated glass slide was prepared by a spin coating process as described in Example 4. The slide was dipped into 0.01 M poly(n-butyl titanate) in n-butanol for 30 seconds and was air-dried for 15 minutes. The slide was later heat treated at 150 °C for 10 minutes in an oven. The heat-treated titanium oxide layer was sensitized with N3 dye solution for 1 hour, washed with ethanol, and warmed on a slide warmer at 40 °C for 10 minutes. The sensitized photoelectrodes were cut into 0.7 cm x 0.7 cm active area

photocells and were sandwiched between platinized conducting electrodes. A liquid electrolyte containing 1 M LiI, 0.05 M iodine, and 1 M t-butyl pyridine in 3-methoxybutyronitrile was applied between the photoelectrode and platinized conducting electrode through capillary action. The photocells exhibited an average η of 3.88 % (3.83, 3.9 and 3.92), an average V_{oc} of 0.73 V (0.73, 0.74 and 0.73 V), and an average I_{sc} of 9.6 mA/cm² (9.88, 9.65 and 9.26), all at AM 1.5 conditions.

Example 7. Post-Interconnection Heating to 70 °C

In this illustrative example, a titanium-dioxide-coated, transparent-conducting-oxide-coated glass slide was prepared by a spin coating process as described in Example 4. The slide was dipped into 0.01 M poly(n-butyl titanate) in n-butanol for 30 seconds and was air-dried for 15 minutes. The slide was later heat treated at 70 °C for 10 minutes in an oven. The heat-treated titanium oxide layer was sensitized with N3 dye solution for 1 hour, washed with ethanol, and warmed on a slide warmer at 40 °C for 10 minutes. The sensitized photoelectrodes were cut into 0.7 cm x 0.7 cm active area photocells and were sandwiched between platinized conducting electrodes. A liquid electrolyte containing 1 M LiI, 0.05 M iodine, and 1 M t-butyl pyridine in 3-methoxybutyronitrile was applied between the photoelectrode and platinized conducting electrode through capillary action. The photocells exhibited an average η of 3.62 % (3.55, 3.73 and 3.58), an average V_{oc} of 0.75 V (0.74, 0.74 and 0.76 V), and average I_{sc} of 7.96 mA/cm² (7.69, 8.22 and 7.97), all at AM 1.5 conditions.

Example 8. Formation on a Flexible, Transparent Substrate

In this illustrative example, a PET substrate about 200 μ m thick and about 5 inches by 8 feet square was coated with ITO and loaded onto a loop coater. An 18.0 mL suspension of titanium dioxide (P25 with 25% solid content) in n-butanol and 0.5 g of poly(n-butyl titanate) in 10 mL of n-butanol were in-line blended and coated onto the ITO coated PET sheet. After deposition, the coating was heated at about 50 °C for about 1 minute. The interconnected nanoparticle layer was then dye-sensitized by coating with a 3×10^{-4} M solution of N3 dye in ethanol.

B. Gel electrolytes for DSSCs

According to further illustrative embodiments, the invention provides electrolyte compositions that include multi-complexable molecules (i.e., molecules containing 2 or

more ligands capable of complexing) and redox electrolyte solutions, which are gelled using metal ions, such as lithium ions. The multi-complexable compounds are typically organic compounds capable of complexing with a metal ion at a plurality of sites. The electrolyte composition can be a reversible redox species that may be liquid by itself or solid components dissolved in a non-redox active solvent, which serves as a solvent for the redox species and does not participate in reduction-oxidation reaction cycle.

Examples include common organic solvents and molten salts that do not contain redox active ions. Examples of redox species include, for example, iodide/triiodide, $\text{Fe}^{2+}/\text{Fe}^{3+}$, $\text{Co}^{2+}/\text{Co}^{3+}$, and viologens, among others. The redox components are dissolved in non-aqueous solvents, which include all molten salts. Iodide based molten salts, e.g., methylpropylimidazolium iodide, methylbutylimidazolium iodide, methylhexylimidazolium iodide, etc., are themselves redox active and can be used as redox active liquids by themselves or diluted with non-redox active materials like common organic solvents or molten salts that do not undergo oxidation-reduction reaction cycles. Multi-dendate inorganic ligands may also be a source of gelling compounds.

Figure 11 depicts an illustrative embodiment of an electrolyte gelled using metal ions. Lithium ions are shown complexed with poly(4-vinyl pyridine). The lithium ions and the organic compounds, in this instance poly(4-vinyl pyridine) molecules capable of complexing at a plurality of sites with the lithium ions, can be used to gel a suitable electrolyte solution. An electrolyte composition prepared in accordance with the invention may include small amounts of water, molten iodide salts, an organic polymer, and other suitable compound gels upon the addition of a metal ion such as lithium. Gelled electrolytes may be incorporated into individual flexible photovoltaic cells, traditional solar cells, photovoltaic fibers, interconnected photovoltaic modules, and other suitable devices. The dotted lines shown in Figure 11 represent the type of bonding that occurs in a photovoltaic gel electrolyte when the constituent electrolyte solution and organic compounds gel after the introduction of a suitable metal ion.

A non-exhaustive list of organic compounds that are capable of complexing with the metal ion at a plurality of sites, and which are suitable for use in the invention, include various polymers, starburst/dendrimeric molecules, and other molecules containing multiple functional groups, e.g., urethanes, esters, ethylene/propylene oxide/imines

segments, pyridines, pyrimidines, N-oxides, imidazoles, oxazoles, triazoles, bipyridines, quinolines, polyamines, polyamides, ureas, β -diketones, and β -hydroxy ketones.

More generally, the multi-complexable molecules employed in various embodiments may be polymeric or small organic molecules that possess two or more ligand or ligating groups capable of forming complexes. Ligating groups are functional groups that contain at least one donor atom rich in electron density, e.g., oxygen, nitrogen, sulfur, or phosphorous, among others and form monodentate or multidentate complexes with an appropriate metal ion. The ligating groups may be present in non-polymeric or polymeric material either in a side chain or part of the backbone, or as part of a dendrimer or starburst molecule. Examples of monodentate ligands include, for example, ethyleneoxy, alkyl-oxy groups, pyridine, and alkyl-imine compounds, among others. Examples of bi- and multidentate ligands include bipyridines, polypyridines, urethane groups, carboxylate groups, and amides.

According to various embodiments of the invention, dye-sensitized photovoltaic cells having a gel electrolyte 1100 including lithium ions are fabricated at or below room temperature or at elevated temperatures below about 300 °C. The temperature may be below about 100 °C, and preferably, the gelling of the electrolyte solution is performed at room temperature and at standard pressure. In various illustrative embodiments, the viscosity of the electrolyte solution may be adjusted to facilitate gel electrolyte deposition using printing techniques such as, for example, screen-printing and gravure-printing techniques. The complexing of lithium ions with various ligands can be broken at higher temperatures, thereby permitting the gel electrolyte compositions to be easily processed during DSSC based photovoltaic module fabrication. Other metal ions may also be used to form thermally reversible or irreversible gels. Examples of suitable metal ions include: Li^+ , Cu^{2+} , Ba^{2+} , Zn^{2+} , Ni^{2+} , Ln^{3+} (or other lanthanides), Co^{2+} , Ca^{2+} , Al^{3+} , Mg^{2+} , and any metal ion that complexes with a ligand.

Figure 12 depicts a gel electrolyte 1200 formed by the complexing of an organic polymer, polyethylene oxide (PEO), by lithium ions. The PEO polymer segments are shown as being complexed about the lithium ions and crosslinked with each other. In another embodiment, the metal ion complexed with various polymer chains can be incorporated into a reversible redox electrolyte species to promote gelation. The gel electrolyte composition that results from the combination is suitable for use in various

photovoltaic cell embodiments such as photovoltaic fibers, photovoltaic cells, and electrically interconnected photovoltaic modules.

Referring back to Figure 6, the charge carrier material 606 can include an electrolyte composition having an organic compound capable of complexing with a metal ion at a plurality of sites; a metal ion such as lithium; and an electrolyte solution. These materials can be combined to produce a gelled electrolyte composition suitable for use in the charge carrier material 606 layer. In one embodiment, the charge carrier material 606 includes a redox system. Suitable redox systems may include organic and/or inorganic redox systems. Examples of such systems include, but are not limited to, cerium(III) sulfate/cerium(IV), sodium bromide/bromine, lithium iodide/iodine, $\text{Fe}^{2+}/\text{Fe}^{3+}$, $\text{Co}^{2+}/\text{Co}^{3+}$, and viologens.

Further illustrative examples of the invention in the context of a DSSC having a gel electrolyte composition are provided below. The photoelectrodes used in the following illustrative examples were prepared according to the following procedure. An aqueous, titania suspension (P25, which was prepared using a suspension preparation technique with total solid content in the range of 30-37 %) was spun cast on $\text{SnO}_2:\text{F}$ coated glass slides ($15 \Omega/\text{cm}^2$). The typical thickness of the titanium oxide coatings was around 8 μm . The coated slides were air dried at room temperature and sintered at 450 $^\circ\text{C}$ for 30 minutes. After cooling the slides to about 80 $^\circ\text{C}$, the slides were immersed into 3×10^{-4} M N3 dye solution in ethanol for 1 hour. The slides were removed and rinsed with ethanol and dried over slide a warmer at 40 $^\circ\text{C}$ for about 10 minutes. The slides were cut into about 0.7 cm \times 0.7 cm square active area cells. The prepared gels were applied onto photoelectrodes using a glass rod and were sandwiched between platinum-coated, $\text{SnO}_2:\text{F}$ coated, conducting glass slides. The cell performance was measured at AM 1.5 solar simulator conditions (i.e., irradiation with light having an intensity of 1000 W/m^2).

Example 9. Effect of Lithium Iodide in Standard Ionic Liquid Based Electrolyte Composition

In this illustrative example, the standard, ionic, liquid-based redox electrolyte composition that was used contained a mixture containing 99 % (by weight) imidazolium iodide based ionic liquid and 1 % water (by weight), combined with 0.25 M iodine and 0.3 M methylbenzimidazole. In various experimental trials, electrolyte solutions with at least a 0.10 M iodine concentration exhibit the best solar conversion efficiency. In a

standard composition, butylmethylimidazolium iodide (MeBuImI) was used as the ionic liquid. Photovoltage decreased with increases in iodine concentration, while photoconductivity and conversion efficiency increased at least up to 0.25 M iodine concentration. Adding lithium iodide to the standard composition enhanced the photovoltaic characteristics V_{oc} and I_{sc} and the η . Therefore, in addition to lithium's use as a gelling agent, it may serve to improve overall photovoltaic efficiency. Table 3 summarizes the effect of LiI on photovoltaic characteristics.

Table 3

	Standard	Standard + 1 wt% LiI	Standard + 2 wt% LiI	Standard + 3 wt% LiI	Standard + 5 wt% LiI
η (%)	2.9 %	3.57	3.75	3.70	3.93
V_{oc} (V)	0.59	0.61	0.6	0.6	0.61
I_{sc} (mA/ cm ²)	10.08	11.4	11.75	11.79	12.62
V_m (V)	0.39	0.4	0.39	0.4	0.39
I_m (mA/ cm ²)	7.44	9.02	9.64	9.0	10.23

The fill factor ("FF") is referenced below and can be calculated from the ratio of the solar conversion efficiency to the product of the open circuit voltage and the short circuit current, i.e., $FF = \eta/[V_{oc} * I_{sc}]$.

Example 10. The Effect of Cations on the Enhancement in Photovoltaic Characteristics

In order to ascertain whether the enhancement in photovoltaic characteristics was due to the presence of lithium or iodide, controlled experimental trials using various iodides in conjunction with cations including lithium, potassium, cesium and tetrapropylammonium iodide were conducted. The iodide concentration was fixed at 376 μ mol/gram of standard electrolyte composition. The standard composition used was a mixture containing 99 % MeBuImI and 1 % water, combined with 0.25 M iodine and 0.3 M methylbenzimidazole. 376 μ mol of various iodide salts per gram of standard electrolyte composition were dissolved in the electrolyte. The complete dissolution of LiI was observed. The other salts took a long time to dissolve and did not dissolve completely over the course of the experimental trial. DSSC-based photovoltaic cells were fabricated using prepared electrolytes containing various cations. Table 4 shows the effect of the various cations on the photovoltaic characteristics. It is apparent from the second column of Table 4 that Li^+ ion shows enhanced photovoltaic characteristics compared to the standard formula, while the other cations do not appear to contribute to the enhancement of the photovoltaic characteristics.

Table 4

	Standard	Standard + LiI	Standard + NPR ₄ I	Standard + KI	Standard + CsI
η (%)	3.23	4.39	2.69	3.29	3.23
V_{oc} (V)	0.58	0.65	0.55	0.58	0.6
I_{sc} (mA/ cm ²)	10.96	12.03	9.8	9.91	10.14
V_m (V)	0.36	0.44	0.36	0.4	0.4
I_m (mA/ cm ²)	8.96	9.86	7.49	8.25	8.32

5 *Example 11. Effect of Ionic Liquid Type*

In one aspect of the invention, MeBuImI-based electrolyte compositions have been found to perform slightly better than MePrImI based electrolytes. In addition, experimental results demonstrate that a 1/1 blend of MeBuImI and MePrImI exhibit better performance than MeBuImI, as shown in Table 5.

Table 5

	<u>376 μmoles of LiI per 1 gram of MeBuImI based standard electrolyte composition.</u>	<u>376 μmoles of LiI per 1 gram of MeBuImI/MePrImI based standard electrolyte composition.</u>
η (%)	3.64	3.99
V_{oc} (V)	0.63	0.63
I_{sc} (mA/ cm^2)	11.05	11.23
V_m (V)	0.42	0.42
I_m (mA/ cm^2)	8.69	9.57

Example 12. Using Li-induced Gelling in Composition A Instead of a Dibromocompound

5 In this illustrative example, a Composition A was prepared by dissolving 0.09 M of iodine in a mixed solvent consisting of 99.5% by weight of 1-methyl-3-propyl imidazolium iodide and 0.5% by weight of water. Then, 0.2 g of poly(4-vinylpyridine) ("P4VP"), a nitrogen-containing compound, was dissolved in 10 g of the Composition A. Further, 0.2 g of 1,6-dibromohexane, an organic bromide, was dissolved in the resultant
10 Composition A solution, so as to obtain an electrolyte composition, which was a precursor to a gel electrolyte.

Gelling occurred quickly when 5 wt % of lithium iodide (376 μ moles of lithium salt per gram of standard electrolyte composition) was used as the gelling agent in an electrolyte composition containing (i) 2 wt % P4VP and (ii) a mixture containing 99.5 %
15 MePrImI and 0.5% water. The gel did not flow when a vial containing the Li-induced gel was tilted upside down. One approach using a dibromo compound produced a phase-segregated electrolyte with cross-linked regions suspended in a liquid, which flows (even after gelling at 100 °C for 30 minutes). A comparison of the photovoltaic characteristics of Composition A, with and without LiI, is presented in the following Tables 6 and 7.
20 The results demonstrate that functional gels suitable for DSSC-based photovoltaic cell fabrication can be obtained using lithium ions, while also improving the photovoltaic characteristics.

Table 6

	Composition A with dibromohexane	Composition A with 2 wt.% P4VP	MeBuImI based electrolyte+ 2 wt.% P4VP+5 wt.% LiI
η (%)	2.6	3.04	3.92
V_{oc} (V)	0.59	0.58	0.65
I_{sc} (mA/ cm ²)	9.73	10.0	11.45
V_m (V)	0.38	0.38	0.42
I_m (mA/ cm ²)	6.82	8.04	9.27

5

Table 7

	Composition A where MePrImI:water is 99.5:0.5 and with 2 % P4VP and 0.09 M Iodine	(b) Same composition as (a), but with 5 wt % of LiI
Physical Properties	Reddish fluid; flows well	Non-scattering Gel; does not flow; can be thinned by applying force using a glass rod.
Efficiency	2.53 %	3.63 %
V_{oc}	0.55 V	0.62 V
I_{sc}	9.82 mA/cm ²	12.29 mA/cm ²
V_m	0.343 V	0.378 V
FF	0.47	0.47

Example 13. Effect of Anions of Lithium Salts on the Efficiency and Photovoltage of DSSCs

- 10 Experiments were performed to study the effect of counter ions on lithium, given lithium's apparent role in enhancing the overall efficiency of DSSCs. 376 μ mol of LiI, LiBr, and LiCl were used per gram of the electrolyte composition containing MePrImI, 1 % water, 0.25 M iodine and 0.3 M methylbenzimidazole in order to study the photovoltaic characteristics of the cells. The photovoltaic characteristics of cells containing these
- 15 electrolytes are presented in Table 8.

	Electrolyte composition with LiI	Electrolyte composition with LiBr	Electrolyte composition with LiCl
Efficiency	3.26 %	3.64 %	3.71 %
V_{oc}	0.59 V	0.62 V	0.65 V
I_{sc}	10.98 mA/cm ²	11.96 mA/cm ²	11.55 mA/cm ²
V_m	0.385 V	0.4 V	0.40 V
FF	0.5	0.49	0.49

Example 14. Passivation and Improved Efficiency and Photovoltage of DSSCs

In the field of photovoltaic cells, the term passivation refers to the process of reducing electron transfer to species within the electrolyte of a solar cell. Passivation typically includes treating a nanoparticle layer by immersion in a solution of t-butylpyridine in methoxypropionitrile or other suitable compound. After the nanomatrix layer, such as a titania sponge, of a photovoltaic cell has been treated with a dye, regions in the nanomatrix layer where the dye has failed to adsorb may exist. A passivation process is typically performed on a DSSC to prevent the reversible electron transfer reaction from terminating as result of reducing agents existing at the undyed regions. The typical passivation process does not appear to be necessary when ionic liquid compositions containing various lithium salts and/or other alkali metal salts are used in the DSSCs. A photovoltage greater than 0.65 V was achieved using a chloride salt of lithium without a passivation process.

In this illustrative example, a DSSC was passivated by immersing it in a solution containing 10 wt % of t-butylpyridine in methoxypropionitrile for 15 minutes. After passivation, the DSSC was dried on a slide warmer maintained at 40 °C for about 10 minutes. Electrolyte compositions containing MePrImI, 1% water, 0.3 M methylbenzimidazole, and 0.25 M iodine were gelled using 376 μ moles of LiI, LiBr, and LiCl per gram of standard electrolyte composition used during this study. Adding a t-butylpyridine-based passivation agent to the electrolyte enhanced the DSSC's photovoltage, but decreased the efficiency of the DSSC by decreasing the photoconductivity. Table 9 summarizes the effects of passivation on photovoltaic characteristics of electrolytes containing various lithium halides.

Table 9

	Electrolyte gelled with LiI	Electrolyte gelled with LiBr	Electrolyte gelled with LiCl
Efficiency	3.5 %	3.65 %	3.85 %
V_{oc}	0.61 V	0.63 V	0.65 V
I_{sc}	10.96 mA/cm ²	11.94 mA/cm ²	11.75 mA/cm ²
V_m	0.395 V	0.4 V	0.405 V
FF	0.52	0.49	0.5

Example 15. Lithium's Role in Gelling the Electrolyte Compositions Containing Polyvinylpyridine and the Effect of Other Alkali Metal Ions on Gelability

5 Lithium cation appears to have a unique effect in gelling ionic liquid composition containing complexable polymers, e.g., P4VP, in as small an amount as 2 wt %. Other alkali metal ions such as sodium, potassium, and cesium were used to carry out gelling experiments. Alkali metal salts such as lithium iodide, sodium chloride, potassium iodide, cesium iodide were added to portions of electrolyte composition containing
10 propylmethylimidazolium iodide (MePrImI), 1% water, 0.25 M iodine, and 0.3 M methylbenzimidazole. Only compositions containing lithium iodide gelled under the experimental conditions used. The remaining three compositions containing sodium, potassium, and cesium did not gel at the experimental conditions used. Divalent metal ions, such as calcium, magnesium, and zinc, or trivalent metals, such as aluminum or
15 other transition metal ions, are other potential gelling salts.

Example 16. Effect of Iodine and Lithium Concentration on Ionic Liquid Electrolyte Gels

 In this illustrative example, gels were prepared by adding lithium salts to an electrolyte composition containing MeBuImI, iodine, and 2 wt % P4VP. The
20 photovoltaic characteristics of the gels were tested using high-temperature sintered, N3 dye sensitized titanium-oxide photoelectrodes and platinized SnO₂:F coated glass slides. Both LiI and LiCl gelled the ionic liquid-based compositions that contained small amounts (2 % was sufficient) of complexable polymers like P4VP. In compositions lacking methylbenzimidazole, the lithium did not effect the photovoltage. 5 wt%
25 corresponds to a composition including about 376 μ moles of lithium salt per gram of ionic liquid and a mixture of 99 wt% butylmethylimidazolium iodide, 1 wt% water, 0.3 M

methyl benzimidazole, and 0.25 M iodine. Therefore, 1 wt% corresponds to a $376/5 \cong 75$

μ moles of lithium salt per gram of ionic liquid composition. The photovoltaic characteristics are summarized in Table 10.

Table 10

	5 % LiI	2.5 % LiI	5 % LiCl	2.5 % LiCl
0.05 M Iodine	= 1.6 % $V_{oc} = 0.6$ V $I_{sc} = 4.89$ mA FF = 0.54 $V_m = 0.445$ V	= 1.23 % $V_{oc} = 0.59$ V $I_{sc} = 4.21$ mA FF = 0.495 $V_m = 0.415$ V	= 0.64 % $V_{oc} = 0.59$ V $I_{sc} = 2.95$ mA FF = 0.36 $V_m = 0.4$ V	= 1.19 % $V_{oc} = 0.58$ V $I_{sc} = 3.87$ mA FF = 0.53 $V_m = 0.426$ V
M Iodine	= 1.22 % $V_{oc} = 0.48$ V $I_{sc} = 6.46$ mA FF = 0.39 $V_m = 0.349$ V	= 1.29 % $V_{oc} = 0.56$ V $I_{sc} = 5.12$ mA FF = 0.45 $V_m = 0.386$ V	= 2.83 % $V_{oc} = 0.57$ $I_{sc} = 9.04$ mA FF = 0.55 $V_m = 0.422$ V	= 2.06 % $V_{oc} = 0.58$ $I_{sc} = 7.14$ mA FF = 0.5 $V_m = 0.42$ V
0.25 M Iodine	= 2.58 % $V_{oc} = 0.55$ V $I_{sc} = 11.49$ mA FF = 0.41 $V_m = 0.338$ V	= 3.06 % $V_{oc} = 0.55$ V $I_{sc} = 10.78$ mA FF = 0.52 $V_m = 0.36$ V	= 3.4 % $V_{oc} = 0.56$ V $I_{sc} = 11.32$ mA FF = 0.54 $V_m = 0.369$ V	= 2.6 % $V_{oc} = 0.56$ V $I_{sc} = 10.18$ mA FF = 0.46 $V_m = 0.364$ V

5

Example 17. Effect of Polymer Concentration on Gelability and Photovoltaic Characteristics of Redox Electrolyte Gels

In this illustrative example, polymer concentration was varied to study its effect on gel viscosity and photovoltaic characteristics. The electrolyte composition used for this study was a mixture containing 99 % MeBuImI, 1 % water, 0.25 M iodine, 0.6 M LiI, and 0.3 M methylbenzimidazole. The concentration of the polymer, P4VP was varied from 1% to 5%. The electrolyte composition with 1% P4VP did flow slowly when the vial containing the gel was tilted down. The gels with 2%, 3%, and 5% did not flow. The gel with 5% P4VP appeared much more solid when compared to the 2% P4VP preparation.

15 Table 11 summarizes the photovoltaic characteristics of the gels containing the various P4VP contents that were studied.

The results show that the photovoltaic characteristics do not vary with the increases in viscosity achieved by increasing the P4VP content. Therefore, the viscosity of the gel can be adjusted without causing degradation to the photovoltaic characteristics.

20 Methylbenzimidazole may be necessary to achieve high η . Increasing the iodine concentration up to 0.25 M also increased the efficiency. Beyond 0.25 M, the photovoltage decreased drastically, reducing the overall efficiency. Other metal ions or

cations like cesium, sodium, potassium or tetraalkylammonium ions were not found to contribute to the efficiency enhancement and did not cause gelling of the electrolyte solutions. Furthermore, chloride anion was found to enhance the efficiency along with lithium, by improving the photovoltage without causing decreased photoconductivity in compositions containing methylbenzimidazole.

Table 11

Photovoltaic Characteristics	1 % P4VP	2 % P4VP	3 % P4VP	5 % P4VP
(%)	3.23	3.48	3.09	3.19
I_{sc} (mA/cm ²)	10.74	10.42	12.03	10.9
V_{oc} (V)	0.59	0.59	0.6	0.61
V_m (V)	0.39	0.4	0.38	0.40
I_m (mA/cm ²)	8.27	8.69	8.07	8.03
FF	0.51	0.57	0.43	0.48

C. Co-sensitizers

According to one illustrative embodiment, the photosensitizing agent described above includes a first sensitizing dye and second electron donor species, the “co-sensitizer.” The first sensitizing dye and the co-sensitizer may be added together or separately to form the photosensitized interconnected nanoparticle material 603 shown in Figure 6. As mentioned above with respect to Figure 6, the sensitizing dye facilitates conversion of incident visible light into electricity to produce the desired photovoltaic effect. In one illustrative embodiment, the co-sensitizer donates electrons to an acceptor to form stable cation radicals, which improves the efficiency of charge transfer from the sensitizing dye to the semiconductor oxide nanoparticle material and reduces back electron transfer to the sensitizing dye or co-sensitizer. The co-sensitizer preferably includes (1) conjugation of the free electron pair on a nitrogen atom with the hybridized orbitals of the aromatic rings to which the nitrogen atom is bonded and, subsequent to electron transfer, the resulting resonance stabilization of the cation radicals by these hybridized orbitals; and (2) a coordinating group, such as a carboxy or a phosphate, the function of which is to anchor the co-sensitizer to the semiconductor oxide. Examples of

suitable co-sensitizers include, but are not limited to, aromatic amines (e.g., such as triphenylamine and its derivatives), carbazoles, and other fused-ring analogues.

Once again referring back to Figure 6, the co-sensitizer is electronically coupled to the conduction band of the photosensitized interconnected nanoparticle material 603.

- 5 Suitable coordinating groups include, but are not limited to, carboxylate groups, phosphates groups, or chelating groups, such as, for example, oximes or alpha keto enolates.

Tables 12-18 below present results showing the increase in photovoltaic cell efficiency when co-sensitizers are co-adsorbed along with sensitizing dyes on the surface of high temperature sintered or low temperature interconnected titania. In Tables 12-18, characterization was conducted using AM 1.5 solar simulator conditions (i.e., irradiation with light having an intensity of 1000 W/m^2). A liquid electrolyte including 1 M LiI, 1 M t-butylpyridine, 0.5 M I_2 in 3-methoxypropanitrile was employed. The data shown in the tables indicates an enhancement of one or more operating cell parameters for both low-temperature-interconnected (Tables 15, 17 and 18) and high-temperature-sintered (Tables 12, 13, 14 and 16) titania nanoparticles. The solar cells characteristics listed include η , V_{oc} , I_{sc} , FF, V_m , and I_m . The ratios of sensitizer to co-sensitizer are based on the concentrations of photosensitizing agents in the sensitizing solution.

In particular, it was discovered that aromatic amines enhance cell performance of dye sensitized titania solar cells if the concentration of the co-sensitizer is below about 50 mol% of the dye concentration. An example of the general molecular structure of the preferred aromatic amines is shown in Figures 13 and 14. Preferably, the concentration of the co-sensitizer is in the range of about 1 mol% to about 20 mol%, and more preferably in the range of about 1 mol% to about 5 mol%.

25 Figure 13A depicts a chemical structure 1300 that may serve as a co-sensitizer. The molecule 1300 adsorbs to the surface of a nanoparticle layer via its coordinating group or chelating group, A. A may be a carboxylic acid group or derivative thereof, a phosphate group, an oxime or an alpha ketoenolate, as described above. Figure 13B depicts a specific embodiment 1310 of the structure 1300, namely DPABA (diphenylaminobenzoic acid), where A = COOH. Figure 13C depicts another specific amine 1320 referred to as DEAPA (N', N-diphenylaminophenylpropionic acid), with A as the carboxy derivative COOH.

Figure 14A shows a chemical structure 1330 that may serve as either a co-sensitizer, or a sensitizing dye. The molecule does not absorb radiation above 500 nm, and adsorbs to a surface of the nanoparticle layer via its coordinating or chelating groups, A. A may be a carboxylic acid group or derivative thereof, a phosphate group, an oxime or an alpha ketoenolate. R₁ and R₂ may each be a phenyl, alkyl, substituted phenyl, or benzyl group. Preferably, the alkyl may contain between 1 and 10 carbons. Figure 14B depicts a specific embodiment 1340 of the structure 1330, namely DPACA (2,6 bis (4-benzoicacid)-4-(4-N,N-diphenylamino) phenylpyridine carboxylic acid), where R₁ and R₂ are phenyl and A is COOH.

DPACA 1340 may be synthesized as follows. 1.49 g (9.08 mmol) of 4-acetylbenzoic acid, 1.69 g (6.18 mmol) of 4-N,N- diphenylbenzaldehyde, and 5.8 g (75.2 mmol) of ammonium acetate were added to 60 ml of acetic acid in a 100 ml round bottom flask equipped with a condenser and stirring bar. The solution was heated to reflux with stirring under nitrogen for 5 hours. The reaction was cooled to room temperature and poured into 150 ml of water, which was extracted with 150 ml of dichloromethane. The dichloromethane was separated and evaporated with a rotary evaporator, resulting in a yellow oil. The oil was then eluted on a silica gel column with 4% methanol/dichloromethane to give the product, an orange solid. The solid was washed with methanol and vacuum dried to give 0.920 g of 2,6 bis (4-benzoicacid)-4-(4-N,N-diphenylamino)phenylpyridine (DPACA). The melting point was 199°-200 °C, the λ_{max} was 421 nm, and the molar extinction coefficient, E was 39,200 L mole⁻¹ cm⁻¹. The structure was confirmed by NMR spectroscopy.

Table 12 shows the results for high-temperature-sintered titania; photosensitized by overnight soaking in solutions of 1 mM N3 dye and three concentrations of DPABA.

Table 12 also shows that the average η is greatest for the preferred 20/1 (dye/co-sensitizer) ratio.

General conditions	I-V CHARACTERIZATION								
	Conditions	Cell area cm ²	V _{oc} V	I _m mA/cm ²	V _m V	I _{sc} mA/cm ²	FF	η %	σ
Adsorption Temp. RT °C	1 mM N3/EtOH, Overnight CONTROL	0.44	0.62	6.69	0.44	8.38	0.56	2.91	
		0.52	0.64	6.81	0.43	8.59	0.54	2.94	
Solvent of Dye		0.54	0.63	6.95	0.41	8.72	0.52	2.84	
EtOH	Average	0.50	0.63	6.82	0.43	8.56	0.54	2.90	0.05
Dye Concen. N3, DPABA	1 mM N3, 0.05 mM DPABA in EtOH for Overnight; 20/1	0.50	0.64	7.70	0.45	9.31	0.58	3.43	
		0.53	0.64	7.40	0.45	9.30	0.56	3.31	
Sintering Temp 450 °C, 30 minutes		0.50	0.64	7.70	0.45	9.38	0.57	3.44	
	Average	0.51	0.64	7.60	0.45	9.33	0.57	3.39	0.07
Thickness of Film TiO ₂ , ~10 μ m	1 mM N3, 1 mM DPABA in EtOH for Overnight; 1/1	0.53	0.63	7.21	0.41	8.58	0.55	2.96	
		0.50	0.63	6.75	0.44	8.23	0.57	2.97	
		0.42	0.63	7.11	0.44	8.67	0.57	3.13	
	Average	0.48	0.63	7.02	0.43	8.49	0.56	3.02	0.10
Electrolyte AM 1.5D, 1 Sun	1 mM N3, 10 mM DPABA in EtOH for Overnight; 1/10	0.33	0.58	4.95	0.42	6.02	0.60	2.08	
		0.52	0.60	5.51	0.42	6.67	0.58	2.31	
		0.49	0.60	5.53	0.42	6.72	0.58	2.32	
Film pretreatment	Average	0.45	0.59	5.33	0.42	6.47	0.58	2.24	0.14

Table 13 shows the results of using a cut-off filter (third and fourth entries) while irradiating a cell to test its I-V characteristics. Table 13 also shows that the efficiency of the cell still improves when DPABA is present, indicating that its effect when no filter is present is not simply due to absorption of UV light by DPABA followed by charge injection. Figure 15 shows a plot 1400 of the absorbance versus wavelength for the cut-off filter used to characterize the photovoltaic cells, according to an illustrative embodiment of the invention. Figure 16 shows a plot 1500 of the absorbance versus wavelength for DPABA, which absorbs below 400 nm. Because the absorbance of the cut-off is large, little light reaches the absorption bands of DPABA.

Table 13

Conditions	I-V CHARACTERIZATION							
	Cell area cm ²	V _{oc} V	I _m mA/cm ²	V _m V	I _{sc} mA/cm ²	FF	η %	σ
1 mM N3 in EtOH Overnight control	0.49	0.70	8.62	0.46	11.02	0.51	3.97	
	0.49	0.70	8.13	0.45	10.20	0.51	3.66	
	0.49	0.73	7.93	0.51	9.69	0.57	4.04	
Average	0.49	0.71	8.23	0.47	10.30	0.53	3.89	0.20
1mM N3 0.05mM DPABA in EtOH, 20/1 Overnight	0.49	0.71	9.05	0.46	11.53	0.51	4.16	
	0.49	0.71	9.24	0.46	11.56	0.52	4.25	
	0.49	0.71	9.39	0.46	11.50	0.53	4.32	
Average	0.49	0.71	9.23	0.46	11.53	0.52	4.24	0.08
1 mM N3 in EtOH Overnight control	0.49	0.69	6.35	0.47	7.83	0.55	4.26	455nm cut off filter used, 70 mW/cm ²
	0.49	0.69	6.05	0.46	7.44	0.54	3.98	
	0.49	0.72	5.74	0.52	6.94	0.60	4.27	
Average	0.49	0.70	6.05	0.48	7.40	0.56	4.17	0.17
1mM N3 0.05mM DPABA in EtOH, 20/1 Overnight	0.49	0.70	6.73	0.47	8.21	0.55	4.52	455nm cut off filter used, 70 mW/cm ²
	0.49	0.70	6.74	0.47	8.19	0.55	4.53	
	0.49	0.70	6.74	0.49	8.25	0.57	4.72	
Average	0.49	0.70	6.74	0.48	8.22	0.56	4.59	0.11

Table 14 shows that the addition of triphenylamine itself (i.e., no titania complexing groups such as carboxy) does not significantly enhance efficiency under the stated conditions.

5

Conditions	I-V CHARACTERIZATION							
	Cell area cm ²	V _{oc} V	I _m mA/cm ²	V _m V	I _{sc} mA/cm ²	FF	η %	σ
0.5 mM N3 in EtOH, Overnight	0.49	0.70	7.96	0.45	9.82	0.52	3.58	
	0.49	0.71	8.09	0.48	9.58	0.57	3.88	
	0.49	0.70	7.47	0.48	8.83	0.58	3.59	
Average	0.49	0.70	7.84	0.47	9.41	0.56	3.68	0.17
0.5 mM N3, 0.025 mM TPA in EtOH Overnight 20/1	0.49	0.69	7.44	0.45	9.21	0.53	3.35	
	0.49	0.69	7.61	0.47	9.75	0.53	3.58	
	0.49	0.69	6.98	0.45	8.56	0.53	3.14	
Average	0.49	0.69	7.34	0.46	9.17	0.53	3.36	0.22
0.5 mM N3, 2.0 mM TPA in EtOH Overnight ¼	0.49	0.68	4.62	0.44	5.66	0.53	2.03	
	0.49	0.66	4.18	0.45	5.38	0.53	1.88	
	0.49	0.66	4.51	0.45	5.82	0.53	2.03	
Average	0.49	0.67	4.44	0.45	5.62	0.53	1.98	0.09

Table 15 shows that the effect is present using low temperature interconnected titania and that the 20/1 (dye/co-sensitizer) ratio is preferred.

5

10

Table 15

Conditions	I-V CHARACTERIZATION							
	Cell area cm ²	V _{oc} V	I _m mA/cm ²	V _m V	I _{sc} mA/cm ²	FF	η %	σ
0.5 mM N3/EtOH, overnight, control	0.49	0.73	8.32	0.50	10.56	0.54	4.16	
	0.51	0.72	8.13	0.49	10.30	0.54	3.98	
	0.50	0.72	8.56	0.47	10.65	0.52	4.02	
Average	0.50	0.72	8.34	0.49	10.50	0.53	4.06	0.09
0.5 mM N3, 0.0125 mM DPABA in EtOH, 40/1, overnight	0.49	0.73	8.55	0.51	10.48	0.57	4.36	
	0.53	0.72	8.53	0.50	11.00	0.54	4.27	
	0.49	0.74	8.08	0.54	10.96	0.54	4.36	
Average	0.50	0.73	8.39	0.52	10.81	0.55	4.33	0.06
0.5 mM N3, 0.017mM DPABA in EtOH, 30/1, overnight	0.49	0.73	9.07	0.49	11.31	0.54	4.44	
	0.49	0.75	8.64	0.52	10.97	0.55	4.49	
	0.52	0.73	8.19	0.52	10.88	0.54	4.26	
Average	0.50	0.74	8.63	0.51	11.05	0.54	4.40	0.12
0.5 mM N3, 0.025 mM DPABA in EtOH, 20/1, overnight	0.50	0.75	8.57	0.52	11.56	0.51	4.46	
	0.49	0.74	8.88	0.52	11.45	0.54	4.62	
	0.53	0.74	9.01	0.51	12.08	0.51	4.60	
Average	0.51	0.74	8.82	0.52	11.70	0.52	4.56	0.09
0.5 mM N3, 0.5 mM DPABA in EtOH, 1/1, overnight	0.49	0.72	8.85	0.48	10.78	0.55	4.25	
	0.51	0.74	8.62	0.47	10.37	0.53	4.05	
	0.50	0.75	8.38	0.49	10.02	0.55	4.11	
Average	0.50	0.74	8.62	0.48	10.39	0.54	4.14	0.10
0.5 mM N3, 5mM DPABA in EtOH, 1/10, overnight	0.49	0.68	7.56	0.44	9.09	0.54	3.33	
	0.51	0.69	7.62	0.46	9.34	0.54	3.51	
	0.49	0.67	7.25	0.45	8.84	0.55	3.26	
Average	0.50	0.68	7.48	0.45	9.09	0.54	3.36	0.13

Table 16 shows results for high-temperature-sintered titania sensitized with a high concentration of N3 dye while maintaining a 20/1 ratio of dye to co-sensitizer. Entries 1 and 2 show the increase in cell performance due to co-sensitizer. Entry 3 shows the effect of DPABA alone as a sensitizer, demonstrating that this material acts as a sensitizer by

itself when irradiated with the full solar spectrum, which includes low-intensity UV radiation.

Table 16

General Conditions	I-V CHARACTERIZATION								
	Conditions	Cell area cm ²	V _{oc} V	I _m mA/cm ²	V _m V	I _{sc} mA/cm ²	FF	η %	σ
Adsorption Temp. RT °C	8mM N3/aprotic polar solvent, 1 hour CONTROL average	0.49	0.68	8.51	0.44	10.07	0.55	3.74	
		0.49	0.67	8.28	0.44	9.75	0.56	3.64	
Solvent of Dye		0.49	0.68	9.16	0.42	10.80	0.52	3.85	
Aprotic polar solvent		0.49	0.68	8.65	0.43	10.21	0.54	3.74	0.10
	8mM N3, 0.4 mM DPABA in aprotic polar solvent, 20/1 1 hour average	0.49	0.68	9.52	0.44	11.18	0.55	4.19	
		0.49	0.68	9.96	0.44	11.59	0.56	4.38	
		0.49	0.65	9.81	0.42	12.13	0.52	4.12	
		0.49	0.67	9.76	0.43	11.63	0.54	4.23	0.14
	5mM DPABA in aprotic polar solvent Overnight	0.49	0.55	1.02	0.42	1.22	0.64	0.43	
		0.49	0.55	0.94	0.41	1.13	0.62	0.39	
		0.49	0.58	0.89	0.44	1.07	0.63	0.39	
		0.49	0.56	0.95	0.42	1.14	0.63	0.40	0.02

5 Table 17 shows results for low-temperature-interconnected titania. Entry 5 shows the affect of DPACA alone as a sensitizer, demonstrating that this material acts as a sensitizer by itself when irradiated with the full solar spectrum, which includes low-intensity UV radiation.

Table 17

I-V CHARACTERIZATION								
Conditions	Cell area cm ²	V _{oc} V	I _{sc} mA/cm ²	V _m V	I _{mp} mA/cm ²	FF	η %	σ
0.5 mM N3/EtOH, overnight, control	0.51	0.73	8.40	0.50	10.84	0.53	4.20	
	0.53	0.72	8.13	0.49	10.30	0.54	3.98	
	0.50	0.72	8.77	0.47	10.87	0.53	4.12	
average	0.51	0.72	8.43	0.49	10.67	0.53	4.10	0.11
0.5 mM N3, 0.01 mM DPACA in EtOH, 50/1, overnight	0.49	0.73	8.10	0.51	10.39	0.54	4.13	
	0.50	0.74	7.95	0.50	10.01	0.54	3.98	
	0.49	0.72	8.10	0.50	9.85	0.57	4.05	
average	0.49	0.73	8.05	0.50	10.08	0.55	4.05	0.08
0.5 mM N3, 0.02 mM DPACA in EtOH, 25/1, overnight	0.49	0.74	8.38	0.50	10.48	0.54	4.19	
	0.52	0.73	8.18	0.48	9.74	0.55	3.93	
	0.49	0.76	8.08	0.54	9.45	0.61	4.36	
average	0.50	0.74	8.21	0.51	9.89	0.57	4.16	0.22
0.5 mM N3, 0.5 mM DPACA in EtOH, 1/1, overnight	0.49	0.73	9.07	0.46	11.31	0.51	4.17	
	0.49	0.75	7.41	0.53	9.24	0.57	3.93	
	0.52	0.76	7.93	0.52	9.12	0.59	4.12	
average	0.50	0.75	8.14	0.50	9.89	0.56	4.07	0.13
0.5 mM N3, 5.0 mM DPACA in EtOH, 1/10, overnight	0.56	0.73	6.36	0.49	7.59	0.56	3.12	
	0.52	0.73	6.63	0.49	7.84	0.57	3.25	
	0.50	0.72	6.53	0.49	7.59	0.59	3.20	
average	0.53	0.73	6.51	0.49	7.67	0.57	3.19	0.07
5.0 mM DPACA in EtOH, overnight	0.43	0.65	3.12	0.49	3.77	0.62	1.53	
	0.45	0.65	2.93	0.49	3.51	0.63	1.44	
	0.49	0.66	2.83	0.49	3.40	0.62	1.39	
average	0.46	0.65	2.96	0.49	3.56	0.62	1.45	0.07

Table 18 shows results for low-temperature-interconnected titania. Entry 6 shows the affect of DEAPA alone as a sensitizer, demonstrating that this material acts as a

sensitizer by itself when irradiated with the full solar spectrum, which includes low-intensity UV radiation.

Table 18

General conditions	I-V CHARACTERIZATION								
	Conditions	Cell area cm ²	V _{oc} V	I _m mA/cm ²	V _m V	I _{sc} mA/cm ²	FF	η %	σ
Adsorption Temp. RT °C Solvent of Dye EtOH	0.5 mM N3/EtOH, overnight, control	0.51	0.72	8.67	0.49	10.60	0.56	4.25	
		0.49	0.75	8.15	0.47	10.50	0.49	3.83	
		0.49	0.74	8.74	0.44	10.63	0.49	3.85	
		average	0.74	8.52	0.47	10.58	0.51	3.97	0.024
Dye Concen. N3, DEAPA Sintering Temp 120 °C, 10 minutes	0.5 mM N3, 0.01 mM DEAPA in EtOH, 50/1, overnight	0.49	0.70	8.68	0.44	11.00	0.50	3.82	
		0.52	0.71	8.57	0.45	11.11	0.49	3.86	
		0.50	0.72	8.40	0.45	10.61	0.49	3.78	
		average	0.71	8.55	0.45	10.91	0.49	3.82	0.004
Thickness of Film TiO ₂ , ~7 μm Liquid Electrolyte AM 1.5D, 1 Sun Film pretreatment	0.5 mM N3, 0.02 mM DEAPA in EtOH, 25/1, overnight	0.51	0.74	8.90	0.44	10.92	0.48	3.92	
		0.53	0.73	8.76	0.44	10.51	0.50	3.85	
		0.49	0.73	8.40	0.45	10.21	0.51	3.78	
		average	0.73	8.69	0.44	10.55	0.50	3.85	0.07
Liquid Electrolyte AM 1.5D, 1 Sun Film pretreatment	0.5 mM N3, 0.5 mM DEAPA in EtOH, 1/1, overnight	0.49	0.71	8.94	0.43	10.78	0.50	3.84	
		0.51	0.71	8.83	0.44	10.37	0.53	3.89	
		0.50	0.70	8.18	0.42	9.71	0.51	3.44	
		average	0.71	8.65	0.43	10.29	0.51	3.72	0.025
Film pretreatment	0.5 mM N3, 5.0 mM DEAPA in EtOH, 1/10, overnight	0.52	0.60	0.88	0.45	1.08	0.61	0.40	
		0.49	0.59	0.71	0.44	0.85	0.62	0.31	
		0.49	0.59	0.75	0.44	0.91	0.61	0.33	
		average	0.59	0.78	0.44	0.95	0.62	0.35	0.041
Film pretreatment	5.0 mM DEAPA in CHCl ₃ , overnight	0.49	0.54	0.41	0.42	0.49	0.65	0.17	
		0.49	0.54	0.35	0.39	0.46	0.55	0.14	
		0.51	0.52	0.45	0.40	0.52	0.67	0.18	
		average	0.53	0.40	0.40	0.49	0.62	0.16	0.02

5 D. Semiconductor Oxide Formulations

In a further illustrative embodiment, the invention provides semiconductor oxide formulations for use with DSSCs formed using a low temperature semiconductor oxide nanoparticle interconnection, as described above. The semiconductor oxide formulations

may be coated at room temperature and, upon drying at temperatures between about 50 °C and about 150 °C, yield mechanically stable semiconductor nanoparticle films with good adhesion to the transparent conducting oxide (TCO) coated plastic substrates. In one embodiment, the nanoparticle semiconductor of the photosensitized interconnected
5 nanoparticle material 603 is formed from a dispersion of commercially available TiO₂ nanoparticles in water, a polymer binder, with or without acetic acid. The polymer binders used include, but are not limited to, polyvinylpyrrolidone (PVP), polyethylene oxide (PEO), hydroxyethyl cellulose (HOEC), hydroxypropyl cellulose, polyvinyl alcohol (PVA) and other water-soluble polymers. The ratio of semiconductor oxide particles,
10 e.g., TiO₂, to polymer can be between about 100:0.1 to 100:20 by weight, and preferably is between about 100:1 to 100:10 by weight. The presence of acetic acid in the formulation helps to improve the adhesion of the coating to the TCO coated substrate. However, acetic acid is not essential to this aspect of the invention and semiconductor oxide dispersions without acetic acid perform satisfactorily. In another embodiment, the
15 TiO₂ nanoparticles are dispersed in an organic solvent, such as, e.g., isopropyl alcohol, with polymeric binders such as, e.g., PVP, butvar, ethylcellulose, etc.

In another illustrative embodiment, the mechanical integrity of the semiconductor oxide coatings and the photovoltaic performance of the dye sensitized cells based on these coatings can be further improved by using a crosslinking agent to interconnect the
20 semiconductor nanoparticles. The polylinkers described above may be used for this purpose. These crosslinking agents can be applied, e.g., in the titania coating formulation directly or in a step subsequent to drying the titania coating as a solution in an organic solvent such as ethanol, isopropanol or butanol. For example, subsequent heating of the films to temperatures in the range of about 70 °C to about 140 °C leads to the formation
25 of TiO₂ bridges between the TiO₂ nanoparticles. Preferably, the concentration of the polylinker in this example ranges from about 0.01 to about 20 weight % based on titania.

E. Semiconductor Primer Layer Coatings

In another illustrative embodiment, the invention provides semiconductor oxide materials and methods of coating semiconductor oxide nanoparticle layers on a base
30 material to form DSSCs. Figure 17 depicts an illustrative embodiment 1600 of the coating process, according to the invention. In this illustrative embodiment, a base material 1610 is coated with a first primer layer 1620 of a semiconductor oxide, and then

a suspension of nanoparticles 1630 of the semiconductor oxide is coated over the primer layer 1620. The primer layer 1620 may include a vacuum-coated semiconductor oxide film (e.g., a TiO_2 film). Alternatively, the primer layer 1620 may include a thin coating with fine particles of a semiconductor oxide (e.g. TiO_2 , SnO_2). The primer layer 1620 may also include a thin layer of a polylinker or precursor solution, one example of which is the Ti (IV) butoxide polymer 400 shown in Figure 4 above. According to one illustrative embodiment of the invention, the base material 1610 is the first flexible, significantly light transmitting substrate 609 referred to in Figure 6. Additionally, the base material 1610 is a transparent, conducting, plastic substrate. According to this illustrative embodiment, the suspension of nanoparticles 1630 is the photosensitized interconnected nanoparticle material 603 of Figure 6. Numerous semiconducting metal oxides, including SnO_2 , TiO_2 , Ta_2O_5 , Nb_2O_5 , and ZnO , among others, in the form of thin films, fine particles, or precursor solutions may be used as primer layer coatings using vacuum coating, spin coating, blade coating or other coating methods.

The primer layer 1620 improves the adhesion of nano-structured semiconductor oxide films, like layer 1630, to the base material 1610. Enhancements in the performance of DSSCs with such primer layers have been observed and will be described below. The enhancement arises from an increase in the adhesion between the semiconductor oxide nanoparticles (or photoelectrodes) and the transparent conducting oxide coated plastic substrates, as well as from higher shunt resistance.

Examples of various illustrative embodiments of this aspect of the invention, in the context of a DSSC including a titanium dioxide nanoparticle layer, are as follows.

Example 18. Vacuum Coated TiO_2 as Prime Layers for Nanoparticle TiO_2

Photoelectrodes

In this illustrative example, thin TiO_2 films with thicknesses ranging from 2.5 nm to 100 nm were sputter-coated under vacuum on an ITO layer coated on a polyester (here, PET) substrate. A water based TiO_2 (P25, with an average particle size of 21 nm) slurry was spin-coated on both the ITO/PET with sputter-coated thin TiO_2 and on the plain ITO/PET (i.e., the portion without sputter-coated thin TiO_2). The coated films were soaked in poly $[\text{Ti}(\text{O}i\text{Bu})_4]$ solution in butanol and then heat treated at 120 °C for 2 minutes. The low- temperature reactively interconnected films were placed into an aprotic, polar solvent-based N3 dye solution (8 mM) for 2 minutes. Photovoltaic cells

were made with platinum (Pt) counter-electrodes, an I^-/I_3^- liquid electrolyte, 2 mil SURLYN, and copper conducting tapes. I-V characterization measurements were performed with a solar simulator.

Adhesion of nanostructured TiO_2 films from the P25 slurry coated on the ITO/PET with sputter-coated, thin TiO_2 was superior to films on the plain ITO/PET. Better photovoltaic performance was also observed from the PV cells prepared on the ITO/PET with sputter-coated, thin TiO_2 as compared to those on the plain ITO/PET. Improvement on the fill-factor was achieved as well. A FF as high as 0.67 was measured for the photovoltaic cells made on the ITO/PETs with sputter-coated, thin TiO_2 . For the photovoltaic cells made on the plain ITO/PET, the FF observed was not greater than 0.60. Higher photovoltaic conversion efficiencies (about 17 % higher than the photoelectrodes made from the plain ITO/PET) were measured for the photoelectrodes prepared on the ITO/PET with thin sputter-coated TiO_2 . Improvement in shunt resistance was also observed for the photovoltaic cells made on the ITO/PET with thin sputter-coated TiO_2 .

Example 19. Fine Particles of TiO_2 as Primer Layer for TiO_2 Suspensions

In this illustrative example, fine particles of TiO_2 , small enough such that they would stick in the valleys between spikes of ITO on the PET substrate, were prepared by hydrolyzing titanium (IV) isopropoxide. The fine particles were then spin coated at 800 rpm onto the ITO layer. A 37% TiO_2 (P25) suspension of approximately 21 nm average particle size was then spin coated at 800 rpm onto the fine particle layer. The coated TiO_2 was low temperature interconnected by dipping in 0.01 molar Ti (IV) butoxide polymer in butanol for 15 minutes followed drying on a slide warmer at 50 °C before heating at 120 °C for 2 minutes. The interconnected coating was dyed with N3 dye by dipping into an 8 mM aprotic polar solvent solution for 2 minutes, then rinsed with ethanol and dried on a slide warmer at 50 °C for 2 minutes. Control coatings were prepared in the same way, except without the fine particle prime coat. The cells' performance characteristics were measured using a solar simulator. Results for test and control are listed below in Table 19. Fine particles of tin oxide as primer coating for TiO_2 suspensions yielded similar improvements.

Table 19

	V_{oc}	I_{sc}	η	FF
Control	0.64	4.86	1.67%	0.54
Invention	0.66	6.27	2.36%	0.57

Example 20. Titanium (IV) Butoxide Polymer in Butanol (Precursor Solution) as Primer Layer for TiO₂

5 In another test, titanium (IV) butoxide polymer in butanol at 0.01 molar was spin coated on an ITO/PET plastic base at 800 rpm. A 43% TiO₂ (P25) suspension of approximately 21 nm average particle size was spin coated at 800 rpm. The coated TiO₂ was interconnected at low temperature by dipping in 0.01 M titanium (IV) butoxide polymer in butanol for 15 minutes and then drying on a slide warmer at 50 °C before
 10 heating at 120 °C for 2 minutes. The sintered coating was dyed with N3 dye by dipping into an 8 mM aprotic, polar solvent solution for 2 minutes, then rinsed with ethanol and dried on a slide warmer at 50 °C for 2 minutes. Control coatings were prepared in the same way only without the primer layer coating. The I-V properties of the cells were measured with a solar simulator. Results for test and control are listed below in Table 20.

Table 20

	V_{oc}	I_{sc}	η	FF
Control	0.66	7.17	2.62%	0.56
Invention	0.70	8.11	3.38%	0.59

While the invention has been particularly shown and described with reference to specific illustrative embodiments, it should be understood that various changes in form and detail may be made without departing from the spirit and scope of the invention as
 20 defined by the appended claims.

What is claimed is:

Claims

1 1. A method of interconnecting nanoparticles at low temperature, the method
2 comprising the steps of:

3 providing a solution comprising a polymeric linking agent and a solvent; and
4 contacting a plurality of metal oxide nanoparticles with the solution at a
5 temperature below about 300°C to interconnect at least a portion of the plurality of metal
6 oxide nanoparticles.

1 2. The method of claim 1, wherein the temperature is below about 200°C.

1 3. The method of claim 1, wherein the temperature is below about 100°C.

1 4. The method of claim 1, wherein the temperature is about room
2 temperature.

1 5. The method of claim 1, wherein the polymeric linking agent comprises a
2 long chain macromolecule.

1 6. The method of claim 5, wherein the long chain macromolecule comprises:
2 a backbone structure substantially similar to a chemical structure of the plurality of
3 metal oxide nanoparticles; and
4 one or more reactive groups chemically bonded to the backbone structure.

1 7. The method of claim 1, wherein the plurality of metal oxide nanoparticles
2 comprise a chemical structure, M_xO_y , wherein x and y are integers.

1 8. The method of claim 7, wherein M comprises one of the group comprising
2 Ti, Zr, Sn, W, Nb, Ta, and Tb.

1 9. The method of claim 1, wherein the polymeric linking agent comprises
2 poly(n-butyl titanate).

1 10. The method of claim 1, wherein the solvent of the solution comprises n-
2 butanol.

1 11. The method of claim 6, wherein at least a portion of the plurality of metal
2 oxide nanoparticles are interconnected via a mechanical bridge formed by the one or more
3 reactive groups binding with the plurality of metal oxide nanoparticles.

1 12. The method of claim 6, wherein at least a portion of the plurality of metal
2 oxide nanoparticles are interconnected via an electrical bridge formed by the one or more
3 reactive groups binding with the plurality of metal oxide nanoparticles.

1 13. The method of claim 1, wherein the plurality of metal oxide nanoparticles
2 are disposed as a thin film on a substrate.

1 14. The method of claim 13, wherein the substrate is dipped into the solution
2 comprising the polymeric linking agent.

1 15. The method of claim 13, wherein the solution comprising the polymeric
2 linking agent is sprayed onto the substrate.

1 16. The method of claim 1, wherein the solution comprising the polymeric
2 linking agent is dispersed on a substrate.

1 17. The method of claim 16, wherein the plurality of metal oxide nanoparticles
2 are deposited on the substrate comprising the solution comprising the polymeric linking
3 agent.

1 18. The method of claim 1, further comprising the step of contacting the metal
2 oxide nanoparticles with a modifier solution.

1 19. The method of claim 1, wherein the plurality of metal oxide nanoparticles
2 comprises nanoparticles of materials selected from the group consisting of titanium
3 oxides, zirconium oxides, zinc oxides, tungsten oxides, niobium oxides, lanthanum
4 oxides, tin oxides, terbium oxides, tantalum oxides, and one or more combinations
5 thereof.

1 20. A polymeric linking agent solution comprising:
2 a polymeric linking agent of the formula $-\text{[O-M(OR)}_i\text{]}_m-$;
3 a plurality of metal oxide nanoparticles comprised of the formula M_xO_y ; and
4 a solvent,

5 wherein (i) i , m , x , and y are integers greater than zero, (ii) M is selected from the
6 group consisting of Ti, Zr, Sn, W, Nb, Ta, and Tb, (iii) R is from the group consisting of
7 hydrogen, alkyls, alkenes, alkynes, aromatics, and acyls, and (iv) the solution contains the
8 polymeric linking agent in a concentration sufficient to interconnect at least a portion of
9 the plurality of metal oxide nanoparticles at a temperature below about 300°C.

1 21. The polymeric linking agent solution of claim 20, wherein the solution
2 contains the polymeric linking agent in a concentration sufficient to interconnect at least a
3 portion of the plurality of nanoparticles at a temperature below about 100°C.

1 22. A flexible photovoltaic cell comprising a photosensitized interconnected
2 nanoparticle material and a charge carrier material, both disposed between first and
3 second flexible, significantly light transmitting substrates.

1 23. The photovoltaic cell of claim 22, wherein the photosensitized
2 interconnected nanoparticle material comprises nanoparticles linked by a polymeric
3 linking agent.

1 24. The photovoltaic cell of claim 22, wherein the photosensitized
2 interconnected nanoparticle material comprises particles with an average size
3 substantially in the range of about 5 nm to about 80 nm.

1 25. The photovoltaic cell of claim 22, wherein the photosensitized
2 interconnected nanoparticle material comprises interconnected titanium dioxide
3 nanoparticles.

1 26. The photovoltaic cell of claim 22, wherein the photosensitized
2 interconnected nanoparticle material is selected from the group consisting of zirconium
3 oxides, zinc oxides, tungsten oxides, niobium oxides, lanthanum oxides, tantalum oxides,
4 tin oxides, terbium oxides, and combinations thereof.

1 27. The photovoltaic cell of claim 22, wherein the photosensitized
2 interconnected nanoparticle material comprises a photosensitizing agent that comprises a
3 molecule selected from the group consisting of xanthenes, cyanines, merocyanines,
4 phthalocyanines, and pyrroles.

1 28. The photovoltaic cell of claim 27, wherein the photosensitizing agent
2 further comprises a metal ion selected from the group consisting of divalent and trivalent
3 metals..

1 29. The photovoltaic cell of claim 27, wherein the photosensitizing agent
2 comprises at least one of a ruthenium transition metal complex, an osmium transition
3 metal complex, and an iron transition metal complex.

1 30. The photovoltaic cell of claim 22, wherein the charge carrier material
2 comprises a redox electrolyte system.

1 31. The photovoltaic cell of claim 22, wherein the charge carrier material
2 comprises a polymeric electrolyte.

1 32. The photovoltaic cell of claim 22, wherein the charge carrier material
2 transmits at least about 60% of incident visible light.

1 33. The photovoltaic cell of claim 22, wherein at least one of the first and
2 second flexible, significantly light transmitting substrates comprises a polyethylene
3 terephthalate material.

1 34. The photovoltaic cell of claim 22, further comprising a catalytic media
2 layer disposed between the flexible, significantly light transmitting first and second
3 substrates.

1 35. The photovoltaic cell of claim 34, wherein the catalytic media layer
2 comprises platinum.

1 36. The photovoltaic cell of claim 22, further comprising an electrical
2 conductor material disposed on at least one of the first and second flexible, significantly
3 light transmitting substrates.

1 37. The photovoltaic cell of claim 36, wherein the electrical conductor
2 material comprises indium tin oxide.

1 38. An electrolyte composition adapted for use in a solar cell, the electrolyte
2 composition comprising, in solution:

1 a gelling compound comprising a metal ion; and
2 an organic compound capable of complexing with the metal ion at a plurality of
3 sites.

1 39. The electrolyte composition of claim 38, wherein the organic compound
2 comprises a polymeric compound. .

1 40. The ele.

1 41. The electrolyte composition of claim 38, wherein the organic compound is
2 selected from the group consisting of poly(4-vinyl pyridine), poly(2-vinyl pyridine),
3 polyethylene oxide, polyurethanes, and polyamides.

1 42. The electrolyte composition of claim 38, wherein the gelling compound is
2 a lithium salt.

1 43. The electrolyte composition of claim 42, wherein the lithium salt has the
2 formula LiX, wherein X is an iodide, bromide, chloride, perchlorate, thiocyanate,
3 trifluoromethyl sulfonate, or hexafluorophosphate.

1 44. The electrolyte composition of claim 40, further comprising iodine at a
2 concentration of at least about 0.05 M.

1 45. An electrolyte solution for use in a solar cell, the electrolyte solution
2 comprising a compound of the formula M_iX_j , wherein i and j are ≥ 1 , X is an anion, and
3 M is selected from the group consisting of Li, Cu, Ba, Zn, Ni, lanthanides, Co, Ca, Al,
4 and Mg.

1 46. The electrolyte solution of claim 45, wherein the anion is selected from the
2 group consisting of chloride, perchlorate, thiocyanate, trifluoromethyl sulfonate, and
3 hexafluorophosphate.

1 47. A photovoltaic cell comprising:
2 first and second significantly light transmitting substrates;
3 a photosensitized interconnected nanoparticle material disposed between the first
4 and second significantly light transmitting substrates; and
5 an electrolyte redox system also disposed between the first and second
6 significantly light transmitting substrates.

1 48. The photovoltaic cell of claim 47, wherein the electrolyte redox system
2 comprises a gelling compound that itself comprises a metal ion, an organic compound
3 capable of complexing with the metal ion at a plurality of sites, and an electrolyte
4 solution.

1 49. The photovoltaic cell of claim 48, wherein the metal ion is a lithium ion. .

1 50. The photovoltaic cell of claim 48, wherein the organic compound
2 comprises a polymeric compound.

1 51. The photovoltaic cell of claim 48, wherein the organic compound is
2 selected from the group consisting of poly(4-vinyl pyridine), poly(2-vinyl pyridine),
3 polyethylene oxide, polyurethanes, and polyamides.

1 52. The photovoltaic cell of claim 48, wherein the gelling compound is a
2 lithium salt.

1 53. The photovoltaic cell of claim 52, wherein the lithium salt has the formula
2 LiX , wherein X is an iodide, bromide, chloride, perchlorate, thiocyanate, trifluoromethyl
3 sulfonate, or hexafluorophosphate.

1 54. The photovoltaic cell of claim 50, further comprising iodine at a
2 concentration of at least about 0.05 M.

1 55. The photovoltaic cell of claim 48, wherein the electrolyte solution
2 comprises:

3 an imidazolium iodide-based ionic liquid having an iodine concentration of at
4 least 0.05 M; and methyl-benzimidazole.

1 56. A method of gelling an electrolyte solution for use in a dye-sensitized solar
2 cell, the method comprising the steps of:
3 providing an electrolyte solution;
4 adding to the electrolyte solution a material capable of complexing at a plurality of sites;
5 and
6 adding to the electrolyte solution a metal ion that complexes at the sites thereby
7 forming a gel.

1 57. The method of claim 56, wherein the steps are performed at a temperature
2 below 50 °C.

1 58. The method of claim 56, wherein the steps are performed at standard
2 pressure.

1 59. The method of claim 56, wherein the electrolyte solution has a gelling rate
2 controlled by changing a concentration of counter ions in the electrolyte solution.

1 60. The method of claim 56, wherein the metal ion is a lithium ion.

1 61. A method for reducing electron transfer to species within the electrolyte of a
2 solar cell, the method comprising the steps of:

3 providing a photovoltaic cell portion comprising a dye-sensitized layer;

4 providing an electrolyte solution comprising a compound capable of
5 complexing at a plurality of sites;

6 adding a compound MX to the electrolyte solution in sufficient amounts to form a gel
7 electrolyte, wherein M is a metal and X is an anion; and
8 adding the gel electrolyte to the photovoltaic cell portion.

1 62. The method of claim 61, wherein the dye-sensitized layer comprises
2 titania.

1 63. The method of claim 61, wherein M is selected from the group consisting
2 of Li, Cu, Ba, Zn, Ni, lanthanides, Co, Ca, Al, and Mg.

1 64. The method of claim 61, wherein the anion is selected from the group
2 consisting of halogens, perchlorates, thiocyanates, trifluoromethyl sulfonates, and
3 hexafluorophosphates.

1 65. An electrolyte composition adapted for use in a solar cell, the electrolyte
2 comprising:
3 at least about 90 wt% of an ionic liquid comprising an imidazolium iodide;
4 an amount of water ranging from 0 to 10 wt%;
5 iodine at a concentration of at least 0.05 M; and
6 methyl-benzimidazole.

1 66. The electrolyte composition of claim 65, wherein the ionic liquid is
2 selected from the group consisting of butylmethylimidazolium iodide,
3 propylmethylimidazolium iodide, hexylmethylimidazolium iodide and combinations
4 thereof.

1 67. The electrolyte composition of claim 65, further comprising LiCl. .

1 68. The electrolyte composition of claim 67, wherein the amount of LiCl is
2 between about 1 wt% LiCl and 6 wt% LiCl.

1 69. The electrolyte composition of claim 67, wherein the amount of LiCl is at
2 least about 1 wt% LiCl.

1 70. The electrolyte composition of claim 67, wherein the amount of LiCl is
2 less than about 6 wt% LiCl.

1 71. The electrolyte composition of claim 65, further comprising LiI. .

1 72. The electrolyte composition of claim 71, wherein the amount of LiI is
2 between about 1 wt% LiI and 6 wt% LiI..

1 73. The electrolyte composition of claim 71, wherein the amount of LiI is at
2 least about 1 wt% LiI.

1 74. The electrolyte composition of claim 71, wherein the amount of LiI is less
2 than about 6 wt% LiI.

1 75. A method of forming a semiconductor oxide nanoparticle layer on a base
2 material, the method comprising the steps of:

3 providing a base material;

4 coating the base material with a primer layer comprising a semiconductor oxide;

5 and

6 applying semiconductor oxide nanoparticles on the primer layer at a temperature
7 below about 300 °C, wherein the primer layer improves adhesion of the semiconductor
8 oxide nanoparticles to the base material.

1 76. The method of claim 75 wherein the temperature is below about 150 °C. .

1 77. The method of claim 75 wherein the temperature is about room
2 temperature.

1 78. The method of claim 75 wherein the primer layer comprises a vacuum-
2 coated semiconductor-oxide film.

1 79. The method of claim 79 herein the vacuum-coated semiconductor-oxide
2 film comprises a titanium dioxide film.

1 80. The method of claim 75 wherein the primer layer comprises a thin coating
2 of fine particles of a semiconductor oxide.

1 81. The method of claim 81 wherein the thin coating of fine particles of a
2 semiconductor oxide comprises titanium dioxide.

1 82. The method of claim 81 wherein the thin coating of fine particles of a
2 semiconductor oxide comprises tin oxide..

1 83. The method of claim 75 wherein the primer layer comprises a thin layer of
2 a polylinker solution.

1 84. The method of claim 83 wherein the polylinker solution comprises a
2 titanium (IV) butoxide polymer.

1 85. The method of claim 83 wherein the polylinker solution comprises a long
2 chain macromolecule. .

1 86. The method of claim 75 wherein the base material comprises a flexible,
2 significantly light transmitting substrate.

1 87. The method of claim 75 wherein the base material comprises an
2 electrically conductive material.

1 88. The method of claim 87 wherein the base material comprises the
2 electrically conductive material deposited onto a flexible, significantly light transmitting
3 substrate.

1 89. The method of claim 87 wherein the electrical conductor material
2 comprises indium tin oxide.

1 90. A flexible photovoltaic cell comprising:
2 a primer layer disposed on a first flexible, significantly light transmitting substrate;
3 a photosensitized interconnected nanoparticle material comprising a suspension of
4 semiconductor oxide nanoparticles disposed on the primer layer;

5 a charge carrier material; and
6 a second flexible, significantly light transmitting substrate, wherein the primer
7 layer, the photosensitized interconnected nanoparticle material, and the charge carrier
8 material are all disposed between the first and second flexible, significantly light
9 transmitting substrates.

1 91. The flexible photovoltaic cell of claim 90 wherein the photosensitized
2 nanoparticle material comprises nanoparticles of materials selected from the group
3 consisting of titanium oxides, zirconium oxides, zinc oxides, tungsten oxides, niobium
4 oxides, lanthanum oxides, tin oxides, terbium oxides, tantalum oxides, and combinations
5 thereof.

1 92. The flexible photovoltaic cell of claim 90 wherein the primer layer
2 comprises a vacuum-coated semiconductor-oxide film.

1 93. The flexible photovoltaic cell of claim 92 wherein the vacuum coated
2 semiconductor oxide film comprises a titanium dioxide film.

1 94. The flexible photovoltaic cell of claim 90 wherein the primer layer
2 comprises a thin coating of fine particles of a semiconductor oxide.

1 95. The flexible photovoltaic cell of claim 94 wherein the thin coating of fine
2 particles of a semiconductor oxide comprises titanium dioxide.

1 96. The flexible photovoltaic cell of claim 90 wherein the thin coating of fine
2 particles of a semiconductor oxide comprises tin oxide.

1 97. The flexible photovoltaic cell of claim 90 wherein the primer layer
2 comprises a thin layer of a polylinker solution.

1 98. The flexible photovoltaic cell of claim 97 wherein the polylinker solution
2 comprises a titanium (IV) butoxide polymer.

1 99. The flexible photovoltaic cell of claim 97 wherein the polylinker solution
2 comprises a long chain macromolecule.

1 100. The flexible photovoltaic cell of claim 90 wherein an electrically
2 conductive material is disposed on the first flexible, significantly light transmitting
3 substrate.

1 101. The flexible photovoltaic cell of claim 100, wherein the electrically
2 conductive material comprises indium tin oxide.

1 102. A nanoparticle layer formulation for a photovoltaic cell, the
2 formulation comprising:

3 a nanoparticle material dispersed in a solvent;

4 a polymer binder soluble in the solvent; and

5 a base material on which is disposed a solution comprising (i) the nanoparticle
6 material and (ii) the polymer binder to form a mechanically stable, nanoparticle film.

1 103. The formulation of claim 102, wherein the mechanically stable,
2 nanoparticle film is formed at substantially room temperature.

1 104. The formulation of claim 102, wherein the solution further comprises
2 acetic acid.

1 105. The formulation of claim 102, wherein the mechanically stable,
2 nanoparticle film comprises a semiconductor oxide.

1 106. The formulation of claim 102, wherein the mechanically stable,
2 nanoparticle film comprises titanium dioxide nanoparticles.

1 107. The formulation of claim 106, wherein the ratio of the titanium dioxide
2 nanoparticles to the polymer binder comprises between about 100:0.1 to about 100:20 by
3 weight.

1 108. The formulation of claim 106, wherein the ratio of the titanium dioxide
2 nanoparticles to the polymer binder comprises between about 100:1 to about 100:10 by
3 weight.

1 109. The formulation of claim 102, wherein the solvent comprises water.

1 110. The formulation of claim 102, wherein the solvent comprises an
2 organic compound.

1 111. The formulation of claim 102, wherein the polymer binder is selected
2 from one of the group consisting of polyvinylpyrrolidone, polyethylene oxide,
3 hydroxyethyl cellulose, ethyl-cellulose, hydroxypropyl cellulose, and polyvinyl alcohol.

1 112. The formulation of claim 102, further comprising a polymeric linking
2 agent to interconnect the nanoparticle material.

1 113. The formulation of claim 102, wherein the base material is a flexible,
2 significantly light transmitting substrate.

1 114. A method of forming a nanoparticle layer in a photovoltaic cell, the
2 method comprising the steps of:

3 providing a nanoparticle material dispersed in a solvent;
4 dispersing a polymer binder in the solvent; and
5 applying a solution comprising the nanoparticle material and the polymer binder to
6 a base material to form a mechanically stable nanoparticle film.

1 115. The method of claim 114, wherein the mechanically stable nanoparticle
2 film comprises a semiconductor oxide.

1 116. The method of claim 114, wherein the mechanically stable nanoparticle
2 film is formed at substantially room temperature.

1 117. The method of claim 114 further comprising the step of drying the base
2 material at a temperature substantially about 150 °C after the solution has been applied.

1 118. The method of claim 117, wherein the temperature is between about 50
2 °C and about 150 °C.

1 119. The method of claim 114, wherein the solution further comprises acetic
2 acid.

1 120. The method of claim 114, wherein the nanoparticle material comprises
2 titanium dioxide nanoparticles.

1 121. The method of claim 120, wherein the ratio of the titanium dioxide
2 nanoparticles to the polymer binder comprises between about 100:0.1 to about 100:20 by
3 weight.

1 122. The method of claim 120, wherein the ratio of the titanium dioxide
2 nanoparticles to the polymer binder comprises between about 100:1 to about 100:10 by
3 weight.

1 123. The method of claim 114, wherein the solvent comprises water.

1 124. The method of claim 114, wherein the solvent comprises an organic
2 compound.

1 125. The method of claim 114, wherein the polymer binder is selected from
2 one of the group consisting of polyvinylpyrrolidone, polyethylene oxide, hydroxyethyl
3 cellulose, ethylcellulose, hydroxypropyl cellulose, and polyvinyl alcohol.

1 126. The method of claim 114, further comprising the step of providing a
2 polymeric linking agent to interconnect the nanoparticle material on the base material at a
3 temperature below about 300 °C.

1 127. The method of claim 126, wherein the temperature is below about 200
2 °C.

1 128. The method of claim 126, wherein the temperature is about room
2 temperature.

1 129. The method of claim 114, wherein the base material comprises a
2 flexible, significantly light transmitting substrate.

1 130. A flexible photovoltaic cell comprising:
2 a charge carrier material disposed between first and second flexible, significantly
3 light transmitting substrates; and

4 a photosensitized interconnected nanoparticle material comprising a
5 semiconductor-oxide nanoparticle material dispersed in a solvent and a polymer binder
6 soluble in the solvent, the photosensitized interconnected nanoparticle material being
7 applied to the first flexible, significantly light transmitting substrate.

1 131. The flexible photovoltaic cell of claim 130, wherein the
2 photosensitized interconnected nanoparticle material comprises nanoparticles linked by a
3 polymeric linking agent.

1 132. The flexible photovoltaic cell of claim 130, wherein the
2 photosensitized interconnected nanoparticle material is selected from the group consisting
3 of titanium oxides, zirconium oxides, zinc oxides, tungsten oxides, niobium oxides,
4 lanthanum oxides, tin oxides, terbium oxides, tantalum oxides, and combinations thereof.

1 133. The flexible photovoltaic cell of claim 130, wherein the
2 photosensitized interconnected nanoparticle material comprises a photosensitizing agent
3 that comprises a molecule selected from the group consisting of xanthenes, cyanines,
4 merocyanines, phthalocyanines, and pyrroles.

1 134. The flexible photovoltaic cell of claim 130, wherein the
2 photosensitized interconnected nanoparticle material comprises a photosensitizing agent
3 that comprises a metal ion selected from the group consisting of divalent and trivalent
4 metals.

1 135. The flexible photovoltaic cell of claim 130, wherein the
2 photosensitized interconnected nanoparticle material comprises a photosensitizing agent

3 that comprises at least one of a ruthenium transition metal complex, an osmium transition
4 metal complex, and an iron transition metal complex.

1 136. The flexible photovoltaic cell of claim 130, wherein the charge carrier
2 material comprises a redox electrolyte system.

1 137. The flexible photovoltaic cell of claim 130, wherein at least one of the
2 first and second substrates comprises a polyethylene terephthalate material.

1 138. The flexible photovoltaic cell of claim 130, wherein the solvent
2 comprises water.

1 139. The flexible photovoltaic cell of claim 130, wherein the solvent
2 comprises an organic compound.

1 140. The flexible photovoltaic cell of claim 130, wherein the polymer
2 binder is selected from one of the group consisting of polyvinylpyrrolidone, polyethylene
3 oxide, hydroxyethyl cellulose, ethylcellulose, hydroxypropyl cellulose, and polyvinyl
4 alcohol.

1 141. A photosensitizing agent for a photovoltaic cell, the photosensitizing
2 agent comprising:
3 a sensitizing dye for receiving electromagnetic energy; and
4 a co-sensitizer comprising a coordinating group for co-adsorbing with the
5 sensitizing dye on a surface.

1 142. The photosensitizing agent of claim 141, wherein the sensitizing dye
2 comprises *cis*-bis(isothiocyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II).

1 143. The photosensitizing agent of claim 141, wherein the co-sensitizer
2 comprises an aromatic amine.

1 144. The photosensitizing agent of claim 141, wherein the co-sensitizer
2 comprises a carbazole.

1 145. The photosensitizing agent of claim 141, wherein the co-sensitizer
2 comprises diphenylaminobenzoic acid.

1 146. The photosensitizing agent of claim 141, wherein the co-sensitizer
2 comprises 2,6 bis(4-benzoic acid)-4-(4-N,N-diphenylamino) phenylpyridine carboxylic
3 acid.

1 147. The photosensitizing agent of claim 141, wherein the co-sensitizer
2 comprises N',N-diphenylaminophenylpropionic acid.

1 148. The photosensitizing agent of claim 141, wherein the coordinating
2 group comprises a carboxy derivative.

1 149. The photosensitizing agent of claim 141, wherein the coordinating
2 group comprises a phosphate group.

1 150. The photosensitizing agent of claim 141, wherein the coordinating
2 group comprises a chelating group.

1 151. The photosensitizing agent of claim 150, wherein the chelating group
2 comprises an oxime.

1 152. The photosensitizing agent of claim 150, wherein the chelating group
2 comprises an alpha-ketoenolate.

1 153. The photosensitizing agent of claim 141, wherein the concentration of
2 the co-sensitizer is below about 50 mol% of the sensitizing dye concentration.

1 154. The photosensitizing agent of claim 141, wherein the concentration of
2 the co-sensitizer is between about 1 mol% and about 20 mol% of the sensitizing dye
3 concentration.

1 155. The photosensitizing agent of claim 141, wherein the concentration of
2 the co-sensitizer is between about 1 mol% and about 5 mol% of the sensitizing dye
3 concentration.

1 156. The photosensitizing agent of claim 141, wherein the ratio of the
2 concentration the sensitizing dye to the co-sensitizer is 20/1.

1 157. A photosensitized nanoparticle layer in a photovoltaic cell, the layer
2 comprising:

3 a sensitizing dye for receiving electromagnetic energy;

4 a co-sensitizer including a coordinating group; and

5 an interconnected nanoparticle material comprising a surface for co-absorbing the
6 sensitizing dye and the co-sensitizer to form a photosensitized nanoparticle layer.

1 158. The photosensitized nanoparticle layer of claim 157, wherein the
2 photosensitized nanoparticle layer comprises semiconductor oxide nanoparticles.

1 159. The photosensitized nanoparticle layer of claim 157, wherein the
2 sensitizing dye comprises *cis*-bis(isothiocyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-
3 ruthenium(II).

1 160. The photosensitized nanoparticle layer of claim 157, wherein the co-
2 sensitizer comprises an aromatic amine.

1 161. The photosensitized nanoparticle layer of claim 157, wherein the co-
2 sensitizer comprises a carbazole.

1 162. The photosensitized nanoparticle layer of claim 157, wherein the co-
2 sensitizer comprises diphenylaminobenzoic acid.

1 163. The photosensitized nanoparticle layer of claim 157, wherein the co-
2 sensitizer comprises 2,6 bis (4-benzoicacid)-4-(4-N,N-diphenylamino) phenylpyridine
3 carboxylic acid.

1 164. The photosensitized nanoparticle layer of claim 157, wherein the co-
2 sensitizer comprises N',N-diphenylaminophenylpropionic acid.

1 165. The photosensitized nanoparticle layer of claim 157, wherein the
2 coordinating group comprises a carboxy derivative.

1 166. The photosensitized nanoparticle layer of claim 157, wherein the
2 coordinating group comprises a phosphate group.

1 167. The photosensitized nanoparticle layer of claim 157, wherein the
2 coordinating group comprises a chelating group.

1 168. The photosensitized nanoparticle layer of claim 167, wherein the
2 chelating group comprises an oxime.

1 169. The photosensitized nanoparticle layer of claim 167, wherein the
2 chelating group comprises an alpha-ketoenolate.

1 170. The photosensitized nanoparticle layer of claim 157, wherein the
2 concentration of the co-sensitizer is below about 50 mol% of the sensitizing dye
3 concentration.

1 171. The photosensitized nanoparticle layer of claim 157, wherein the
2 concentration of the co-sensitizer is between about 1 mol% and about 20 mol% of the
3 sensitizing dye concentration.

1 172. The photosensitized nanoparticle layer of claim 157, wherein the
2 concentration of the co-sensitizer is between about 1 mol% and about 5 mol% of the
3 sensitizing dye concentration.

1 173. The photosensitized nanoparticle layer of claim 157, wherein the ratio
2 of the concentration the sensitizing dye to the co-sensitizer is 20/1.

1 174. A method of forming a photosensitized nanoparticle layer in a
2 photovoltaic cell, the method comprising the steps of:

3 providing a sensitizing dye for receiving electromagnetic energy;
4 co-adsorbing a co-sensitizer including a coordinating group on a surface of an
5 interconnected nanoparticle material to form a photosensitized nanoparticle layer.

1 175. The method of claim 174, wherein the photosensitized nanoparticle
2 layer comprises semiconductor oxide nanoparticles.

1 176. The method of claim 174, wherein the sensitizing dye comprises *cis*-
2 bis(isothio-cyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II).

1 177. The method of claim 174, wherein the co-sensitizer comprises an
2 aromatic amine.

1 178. The method of claim 174, wherein the co-sensitizer comprises a
2 carbazole.

1 179. The method of claim 174, wherein the co-sensitizer comprises
2 diphenylaminobenzoic acid.

1 180. The method of claim 174, wherein the co-sensitizer comprises 2,6 bis
2 (4-benzoicacid)-4-(4-N,N-diphenylamino) phenylpyridine carboxylic acid.

1 181. The method of claim 174, wherein the co-sensitizer comprises N',N-
2 diphenylamino-phenylpropionic acid.

1 182. The method of claim 174, wherein the coordinating group comprises a
2 carboxy derivative.

1 183. The method of claim 174, wherein the coordinating group comprises a
2 phosphate group.

1 184. The method of claim 174, wherein the coordinating group comprises a
2 chelating group.

1 185. The method of claim 184, wherein the chelating group comprises an
2 oxime.

1 186. The method of claim 184, wherein the chelating group comprises an
2 alpha-ketoenolate.

1 187. The method of claim 174, wherein the concentration of the co-sensitizer is
2 below about 50 mol% of the sensitizing dye concentration.

1 188. The method of claim 174, wherein the concentration of the co-
2 sensitizer is between about 1 mol% and about 20 mol% of the sensitizing dye
3 concentration.

1 189. The method of claim 174, wherein the concentration of the co-
2 sensitizer is between about 1 mol% and about 5 mol% of the sensitizing dye
3 concentration.

1 190. The method of claim 174, wherein the ratio of the concentration the
2 sensitizing dye to the co-sensitizer is 20/1.

1 191. A flexible photovoltaic cell comprising:
2 a photosensitized interconnected nanoparticle material comprising (i) a sensitizing
3 dye for receiving electromagnetic energy and (ii) a co-sensitizer including a coordinating
4 group, both adsorbed on a surface of an interconnected nanoparticle material;
5 first and second flexible, significantly light transmitting substrates; and
6 a charge carrier material, the charge carrier material and the photosensitized
7 interconnected nanoparticle material both being disposed between the first and second
8 flexible, significantly light transmitting substrates.

1 192. The flexible photovoltaic cell of claim 191, wherein the sensitizing dye
2 comprises *cis*-bis(isothio-cyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II).

1 193. The flexible photovoltaic cell of claim 191, wherein the co-sensitizer
2 comprises an aromatic amine.

1 194. The flexible photovoltaic cell of claim 191, wherein the co-sensitizer
2 comprises a carbazole.

1 195. The flexible photovoltaic cell of claim 191, wherein the co-sensitizer
2 comprises diphenylaminobenzoic acid.

1 196. The flexible photovoltaic cell of claim 191, wherein the co-sensitizer
2 comprises 2,6 bis (4-benzoicacid)-4-(4-N,N-diphenylamino) phenylpyridine carboxylic
3 acid.

1 197. The flexible photovoltaic cell of claim 191, wherein the co-sensitizer
2 comprises N',N-diphenylaminophenylpropionic acid.

1 198. The flexible photovoltaic cell of claim 191, wherein the coordinating
2 group comprises a carboxy derivative.

1 199. The flexible photovoltaic cell of claim 191, wherein the coordinating
2 group comprises a phosphate group.

1 200. The flexible photovoltaic cell of claim 191, wherein the coordinating
2 group comprises a chelating group.

1 201. The flexible photovoltaic cell of claim 200, wherein the chelating
2 group comprises an oxime.

1 202. The flexible photovoltaic cell of claim 200, wherein the chelating
2 group comprises an alpha-ketoenolate.

1 203. The flexible photovoltaic cell of claim 191, wherein the concentration of
2 the co-sensitizer is below about 50 mol% of the sensitizing dye concentration.

1 204. The flexible photovoltaic cell of claim 191, wherein the concentration
2 of the co-sensitizer is between about 1 mol% and about 20 mol% of the sensitizing dye
3 concentration.

1 205. The flexible photovoltaic cell of claim 191, wherein the concentration
2 of the co-sensitizer is between about 1 mol% and about 5 mol% of the sensitizing dye
3 concentration.

1 206. The flexible photovoltaic cell of claim 191, wherein the ratio of the
2 concentration the sensitizing dye to the co-sensitizer is 20/1.

1 207. The flexible photovoltaic cell of claim 191, wherein the
2 photosensitized interconnected nanoparticle material comprises nanoparticles linked by a
3 polymeric linking agent.

1 208. The flexible photovoltaic cell of claim 191, wherein the
2 photosensitized interconnected nanoparticle material comprises particles with an average
3 size substantially in the range of 10 nm to 40 nm.

1 209. The flexible photovoltaic cell of claim 191, wherein the
2 photosensitized interconnected nanoparticle material comprises interconnected titanium
3 dioxide nanoparticles.

1 210. The flexible photovoltaic cell of claim 191, wherein the
2 photosensitized interconnected nanoparticle material is selected from the group consisting
3 of zirconium oxides, zinc oxides, tungsten oxides, niobium oxides, lanthanum oxides, tin
4 oxides, terbium oxides, tantalum oxides, and combinations thereof.

1 211. The flexible photovoltaic cell of claim 191, wherein the charge carrier
2 material comprises an electrolyte redox system.

1 212. The flexible photovoltaic cell of claim 191, wherein the charge carrier
2 material comprises a polymeric electrolyte.

1 213. The flexible photovoltaic cell of claim 191, wherein the charge carrier
2 material transmits at least about 60% of incident visible light.

1 214. The flexible photovoltaic cell of claim 191, wherein at least one of the
2 first and second flexible, significantly light transmitting substrates comprises a
3 polyethylene terephthalate material.

1 215. The flexible photovoltaic cell of claim 191, further comprising a
2 catalytic media layer disposed between the first and second flexible, significantly light
3 transmitting substrates.

1 216. The flexible photovoltaic cell of claim 215, wherein the catalytic media
2 layer comprises platinum.

1 217. The flexible photovoltaic cell of claim 191, further comprising an
2 electrical conductor material disposed on at least one of the first and second flexible,
3 significantly light transmitting substrates.

1 218. The flexible photovoltaic cell of claim 217, wherein the electrical
2 conductor material comprises indium tin oxide.

1 219. The flexible photovoltaic cell of claim 130, wherein at least one of the first
2 and second substrates comprises a polyethylene naphthalate material.

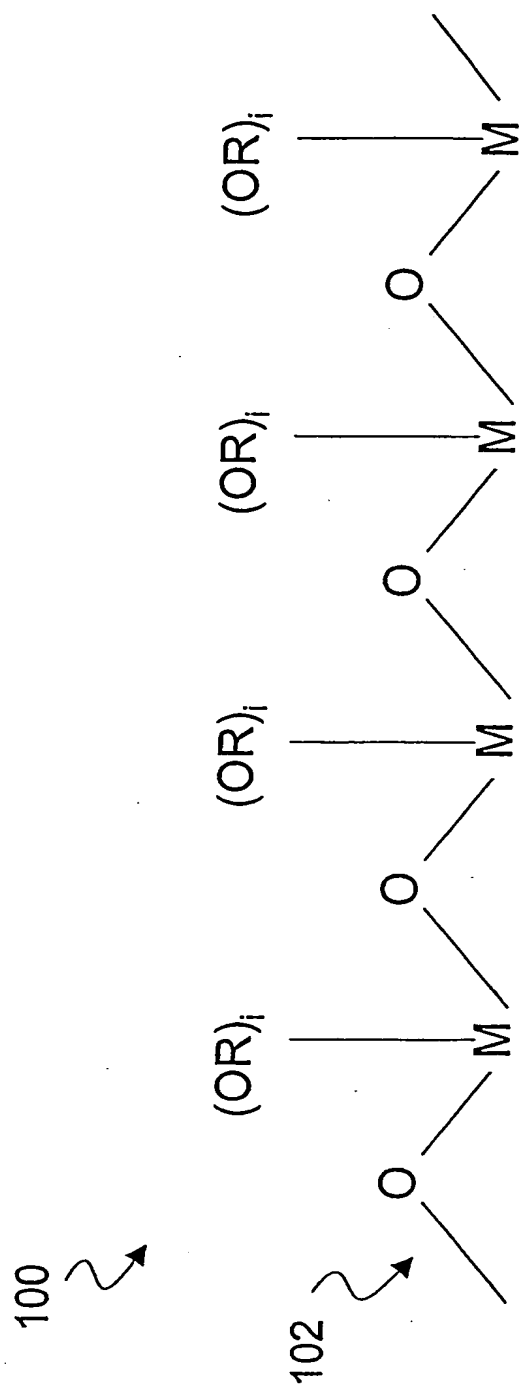


Figure 1

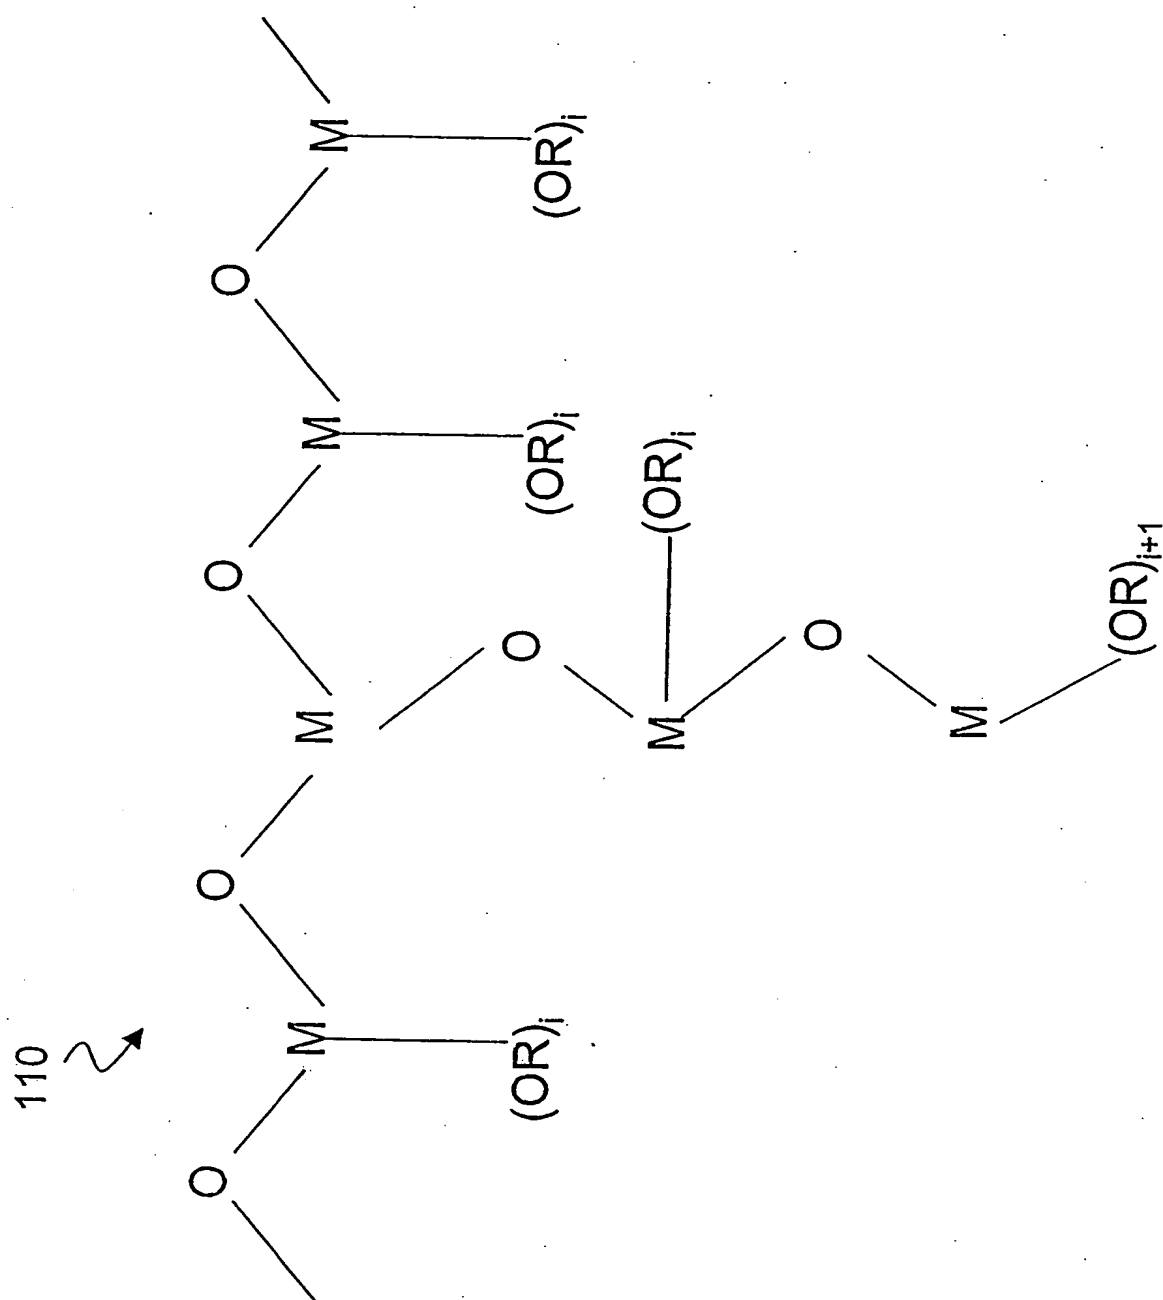


Figure 2

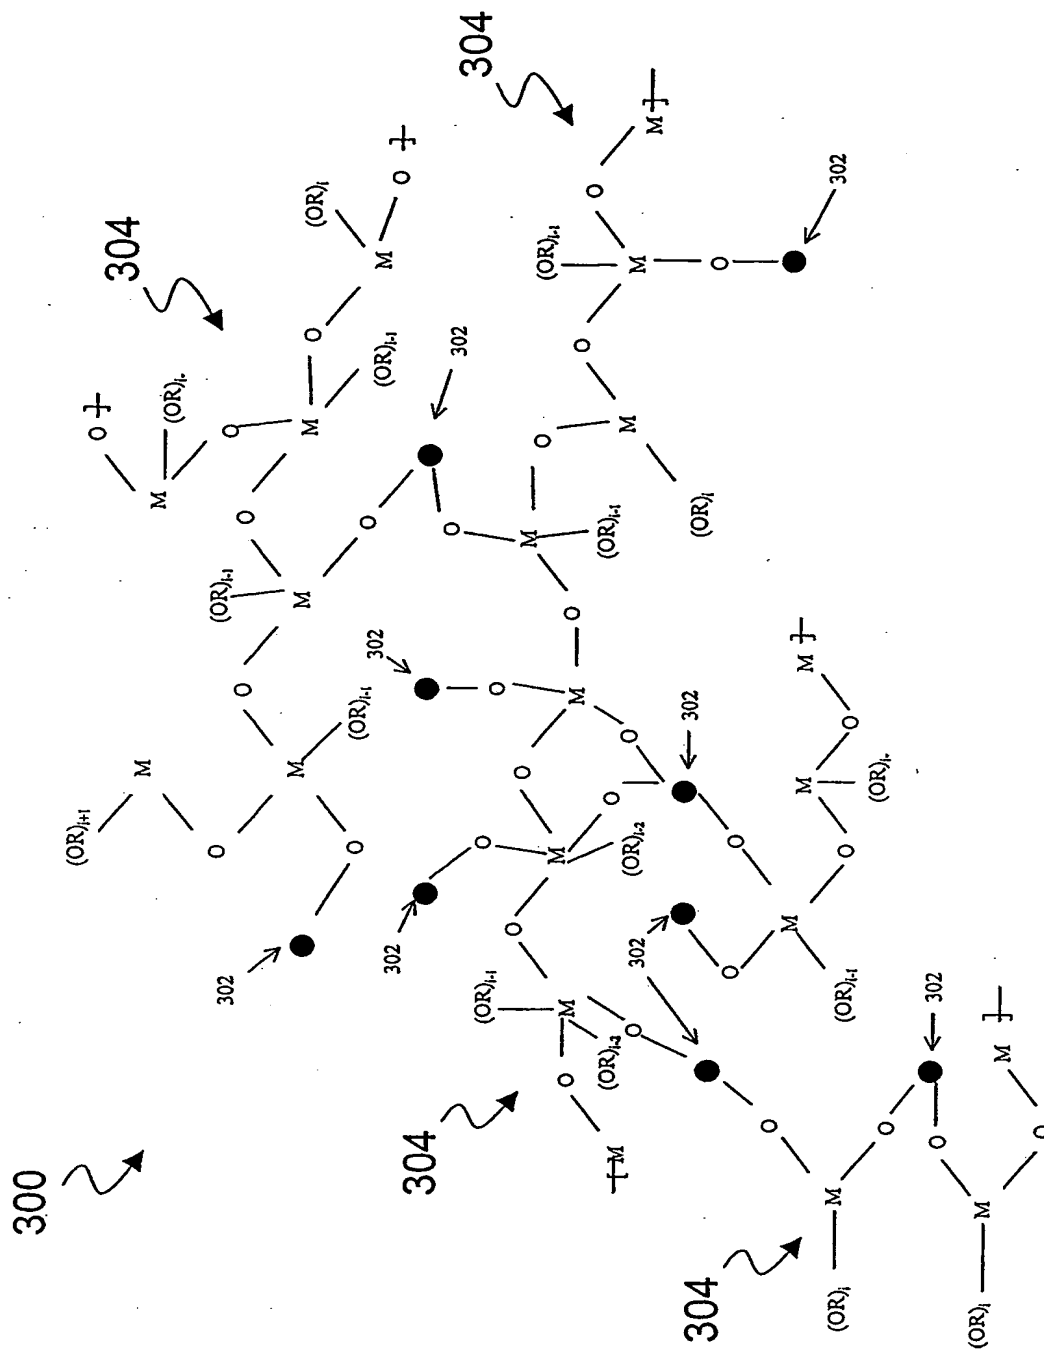


Figure 3A

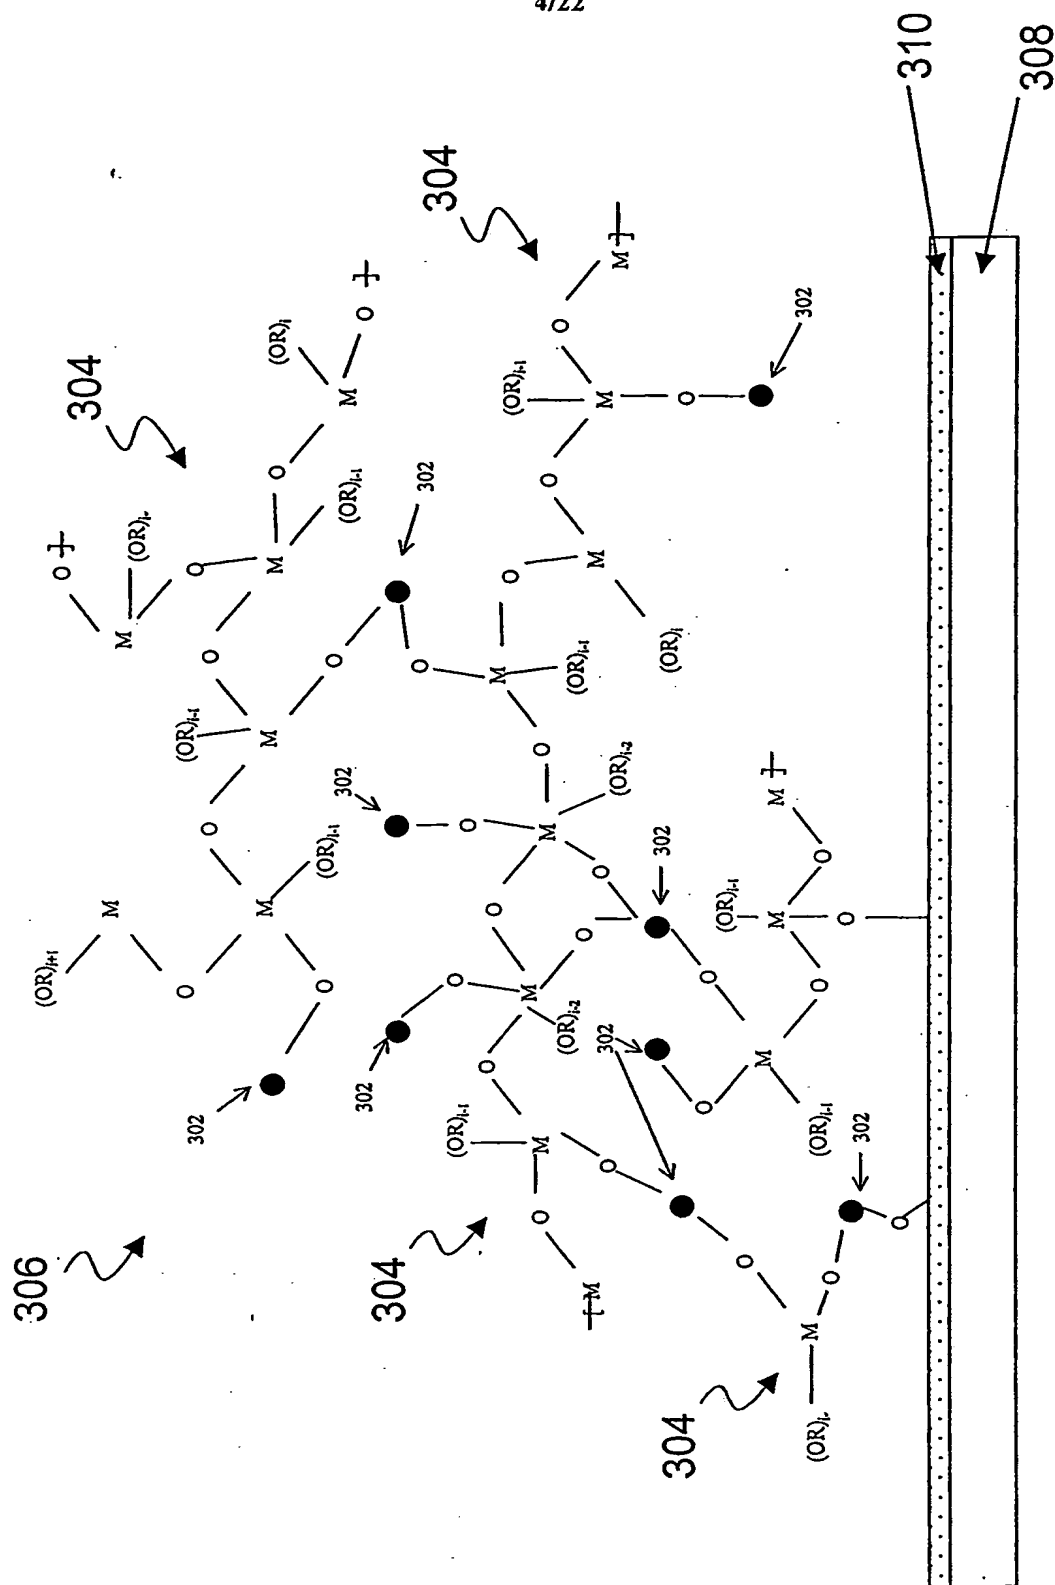


Figure 3B

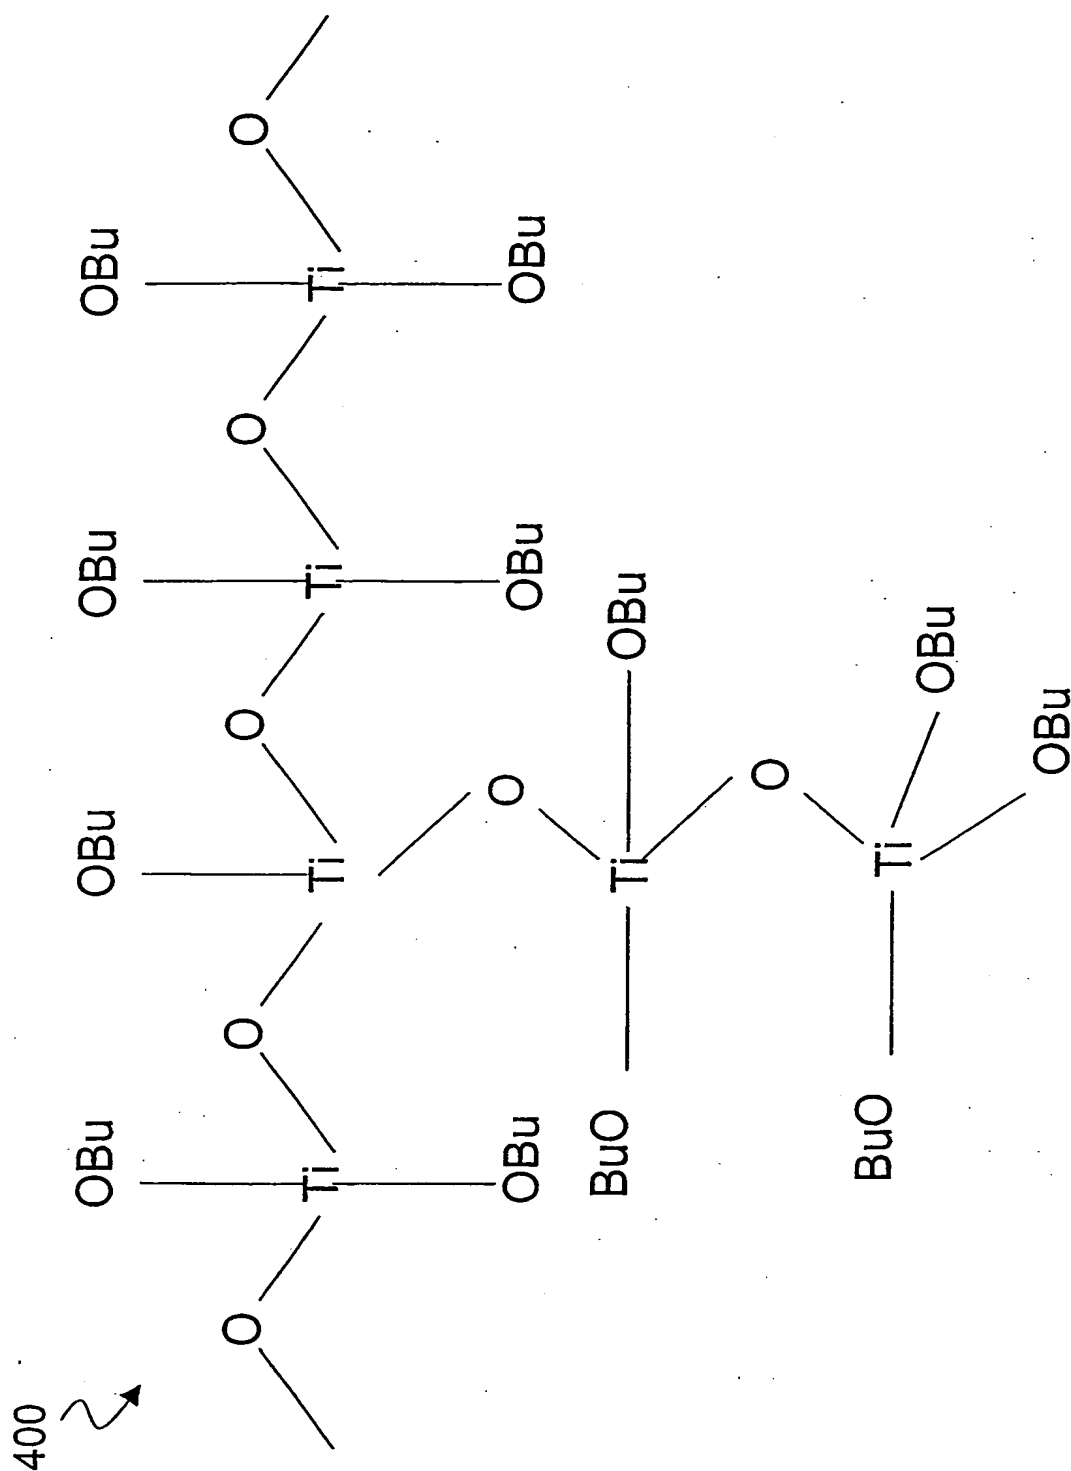


Figure 4

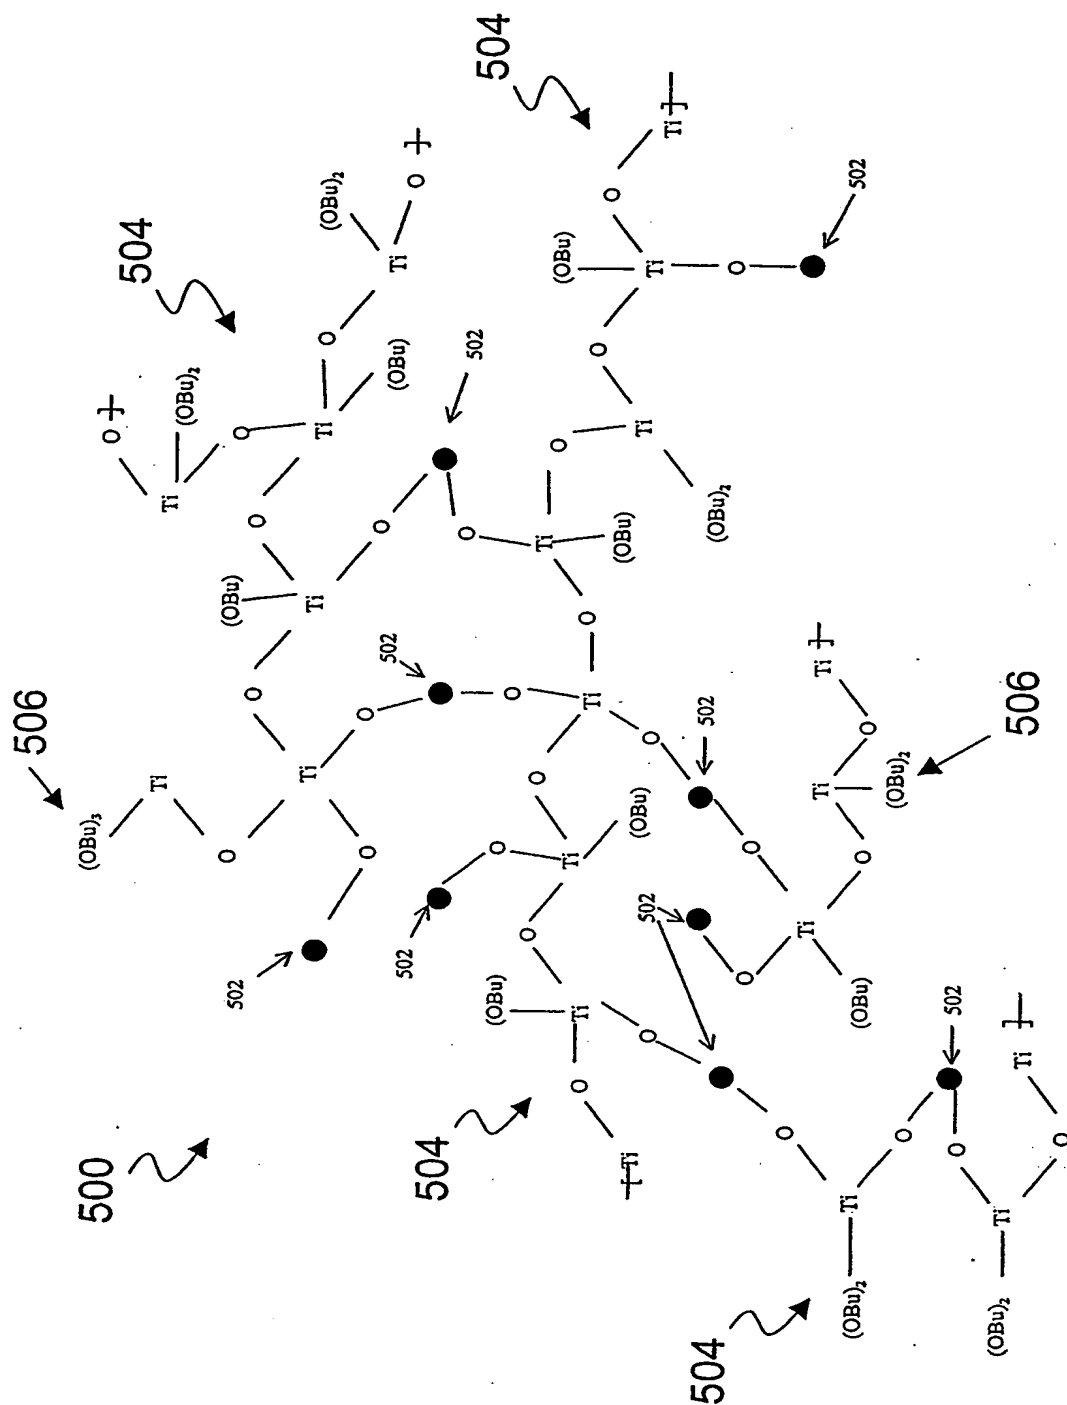


Figure 5A

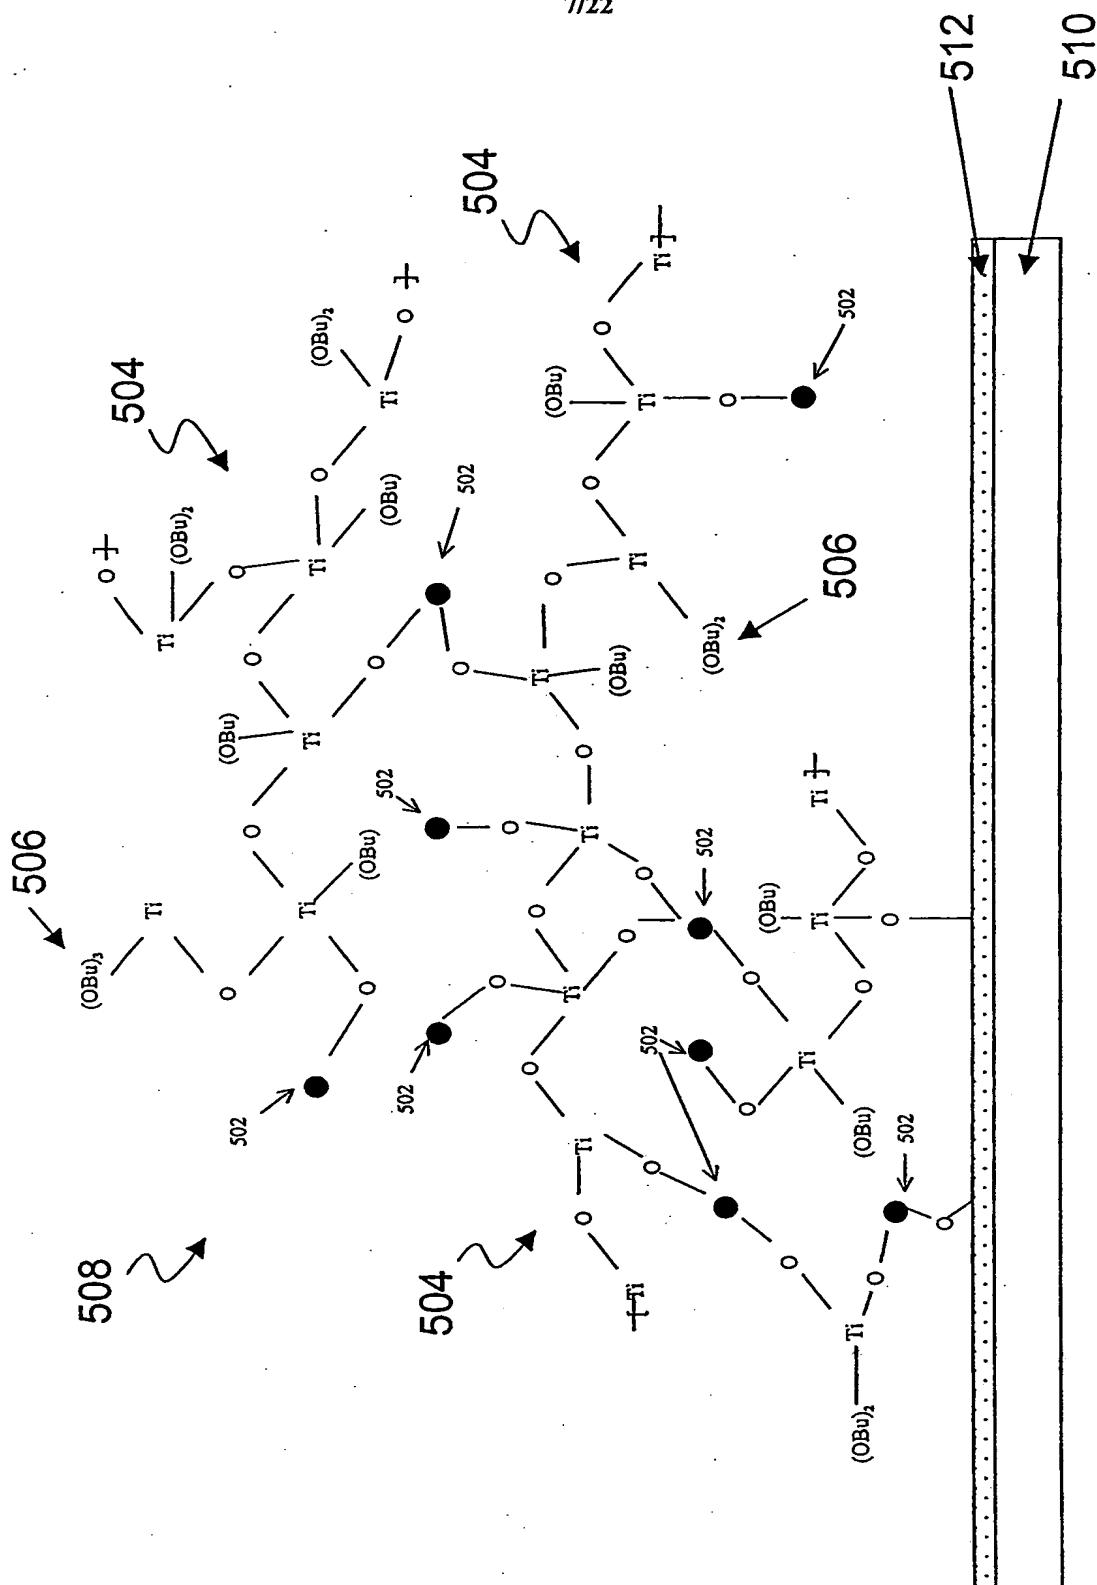


Figure 5B

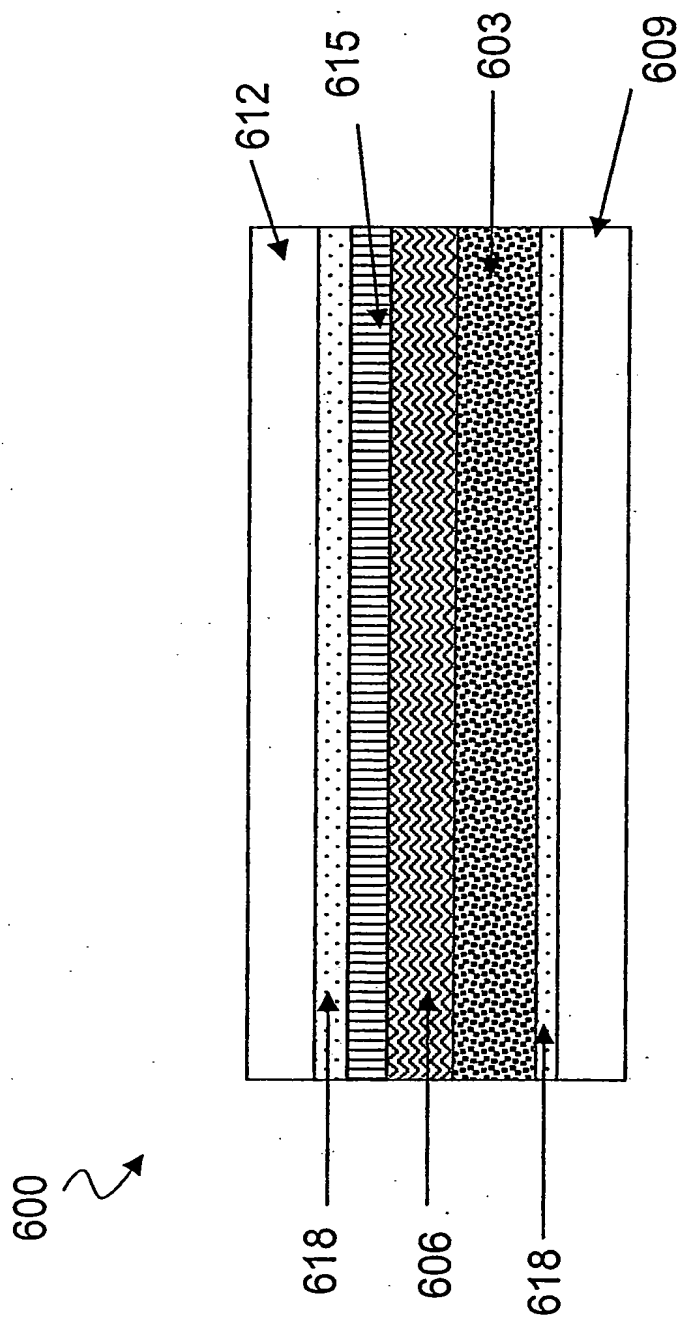


Figure 6

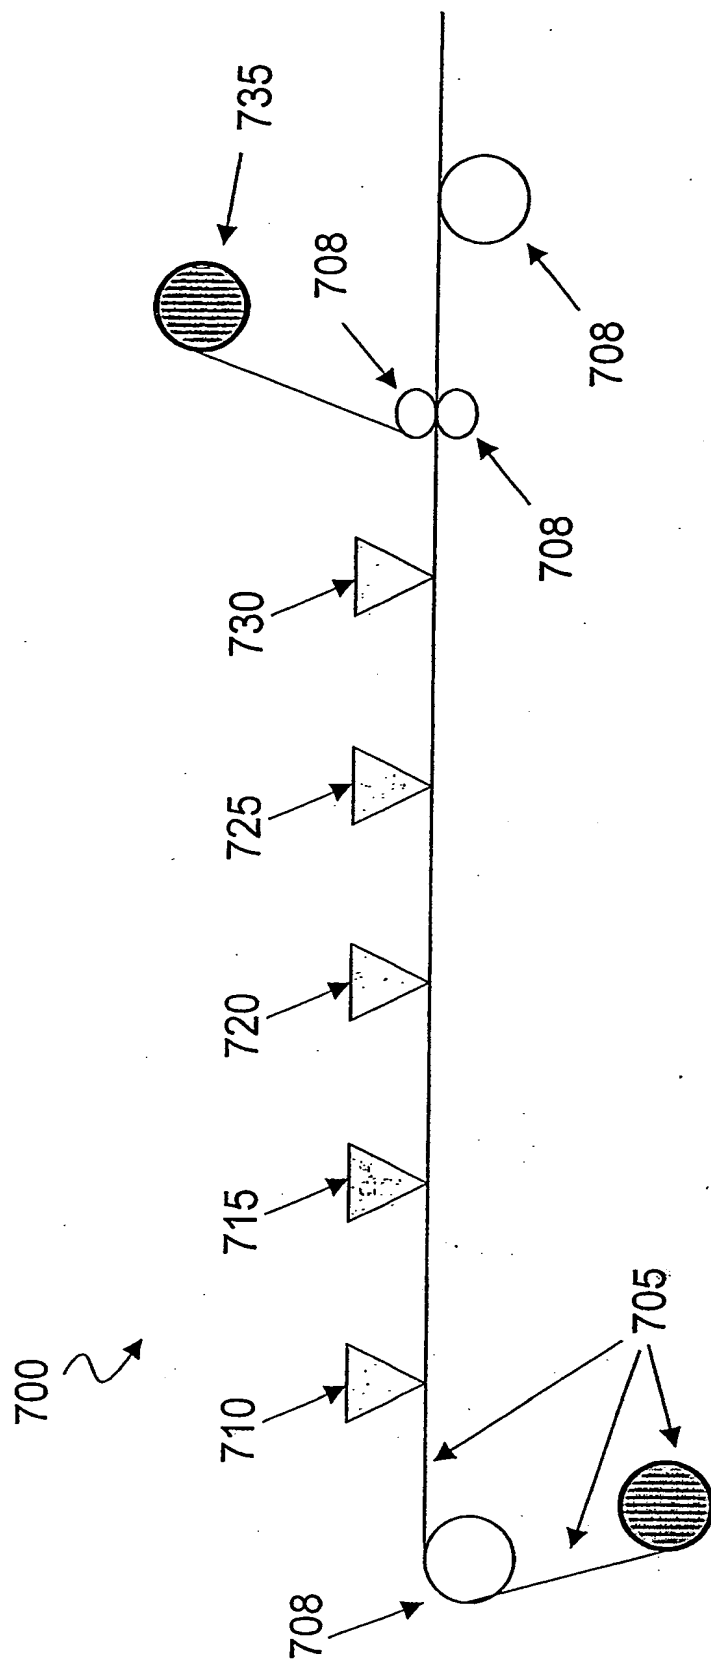


Figure 7

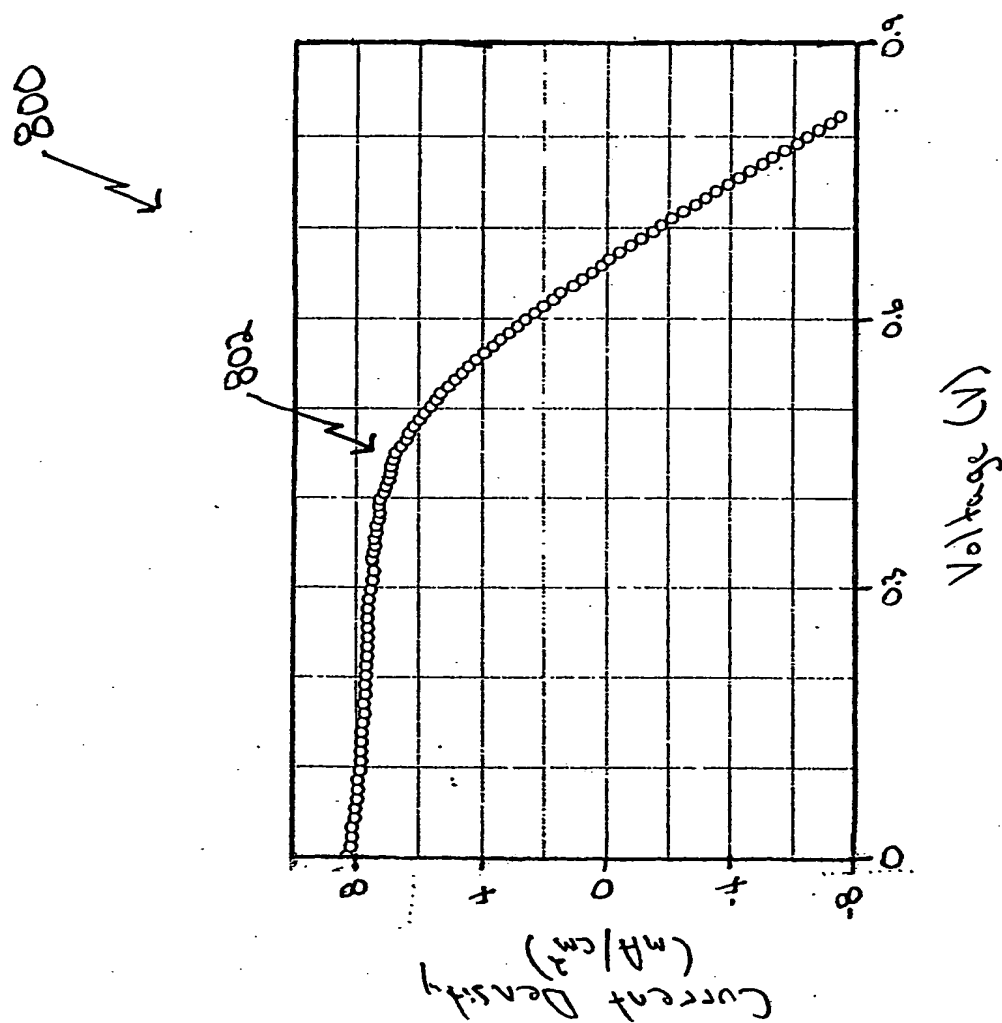


Figure 8

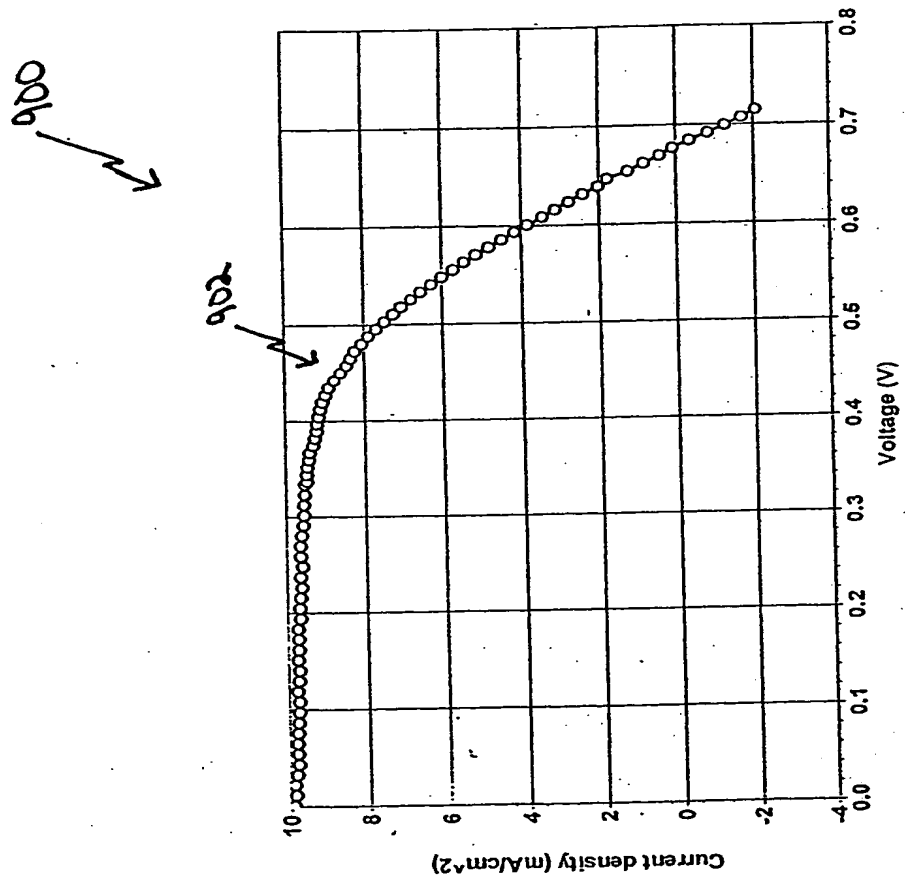


Figure 9

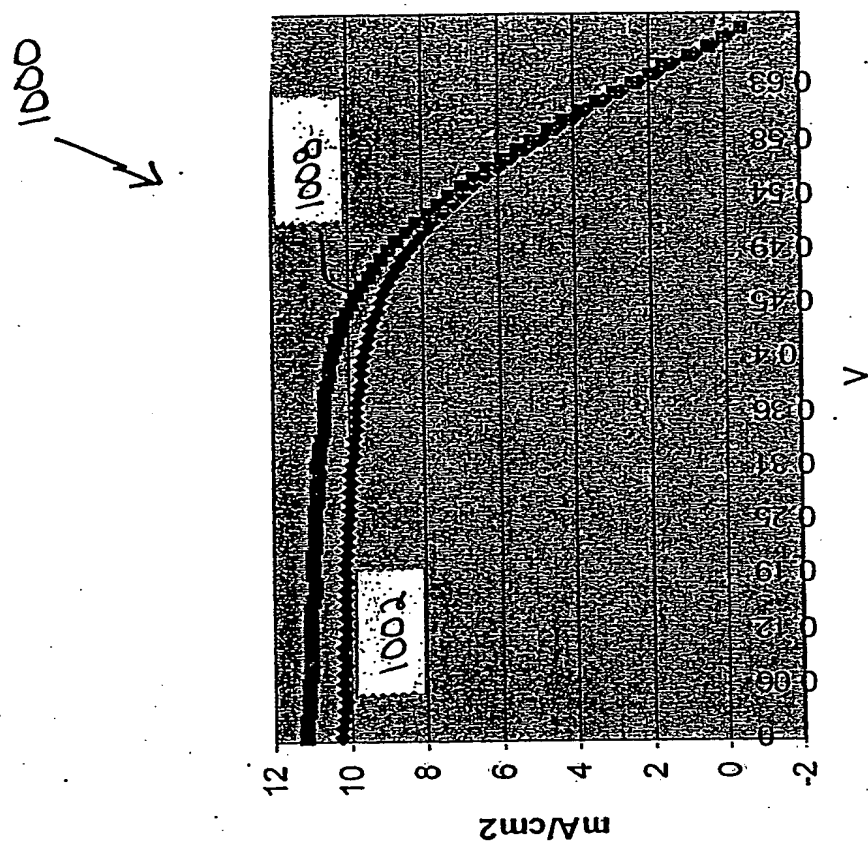


Figure 10

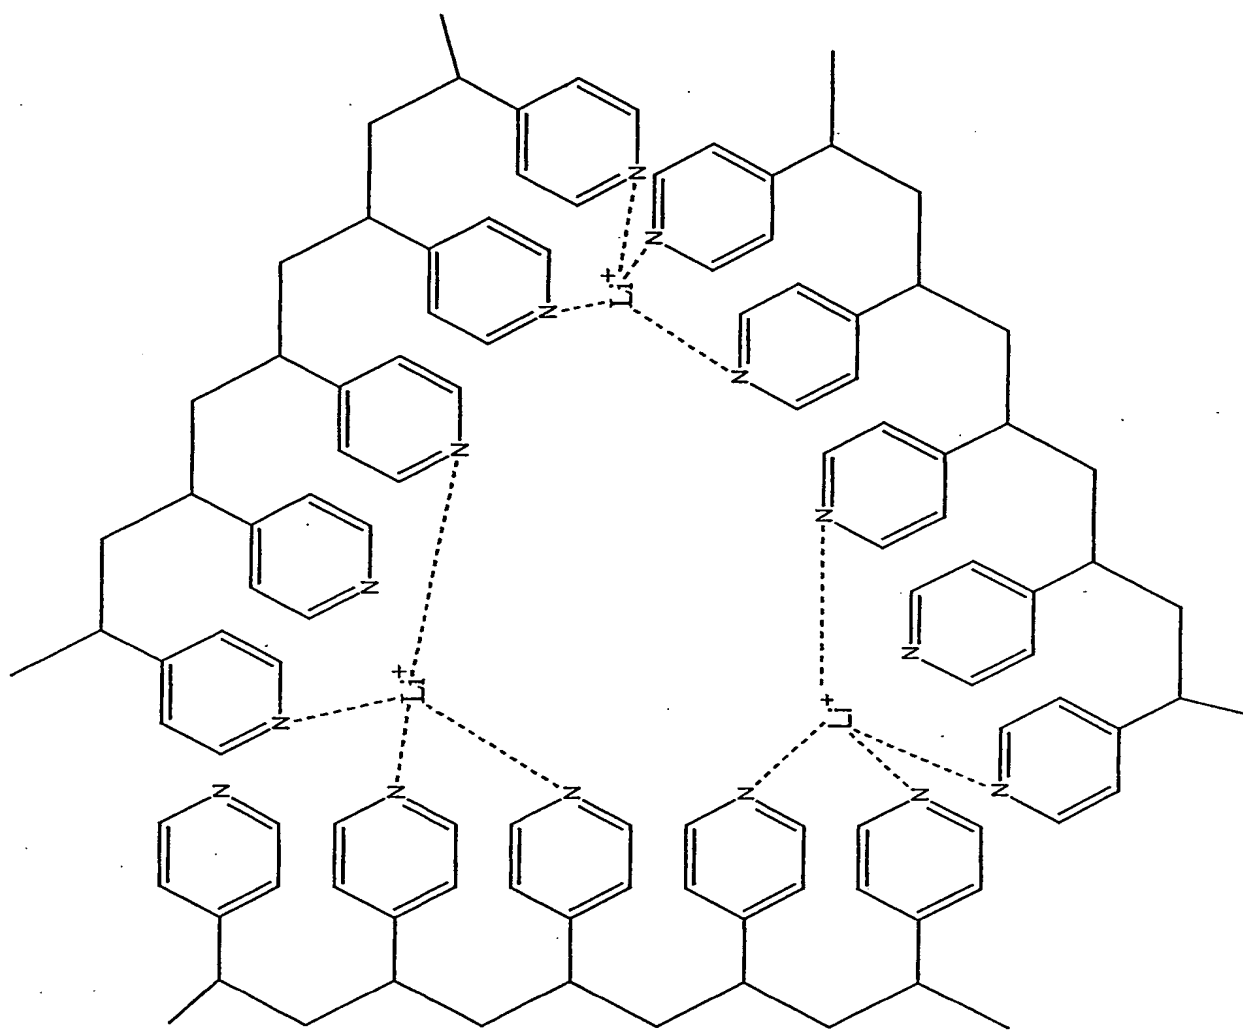


Figure 11

1100 ↗

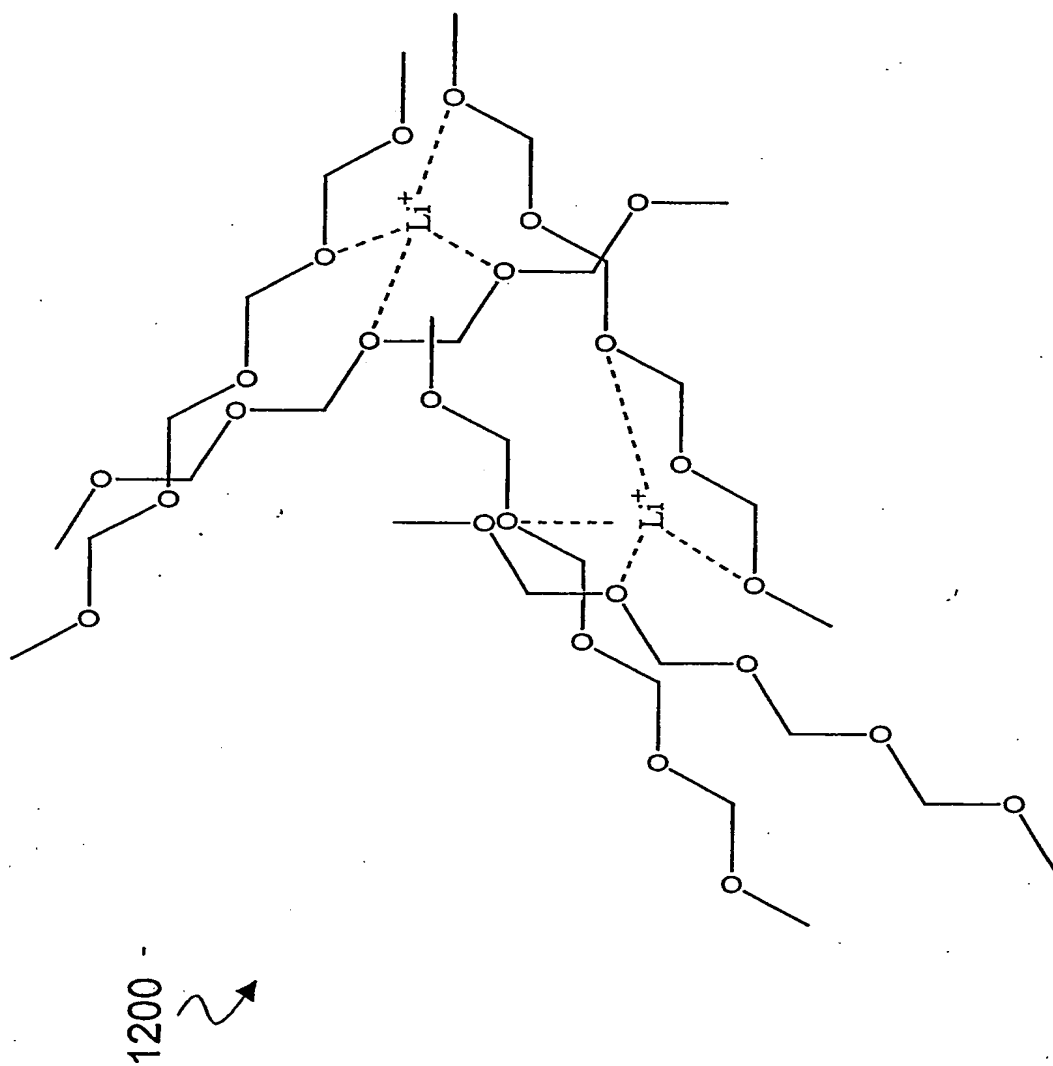


Figure 12

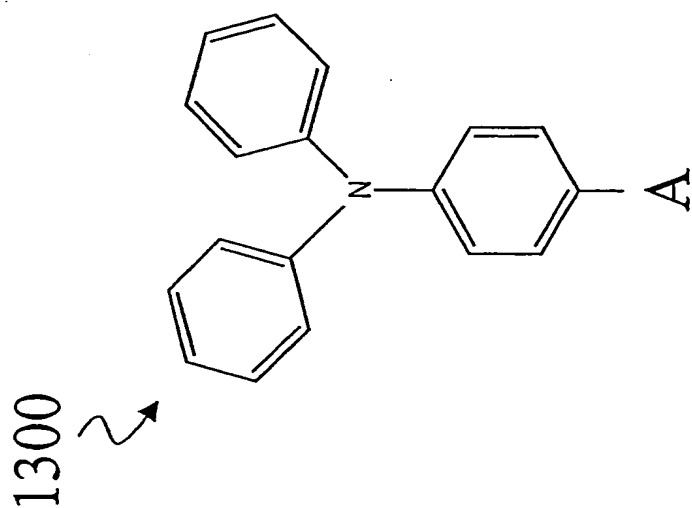


Figure 13A

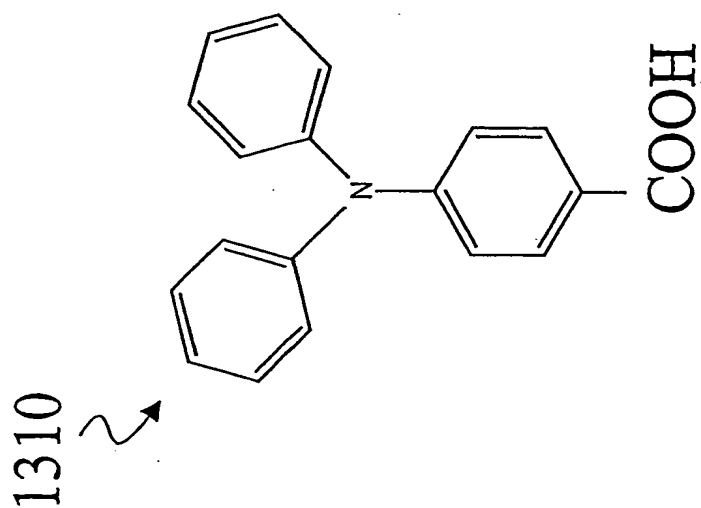


Figure 13B

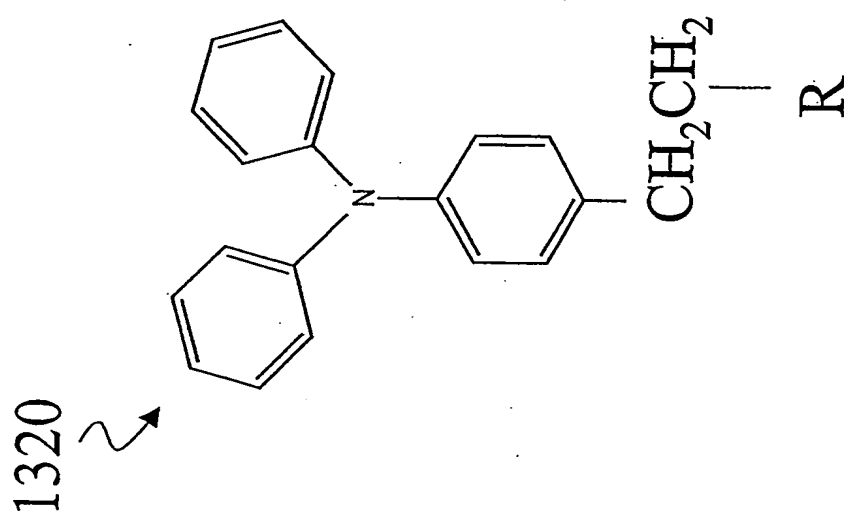


Figure 13C

1330

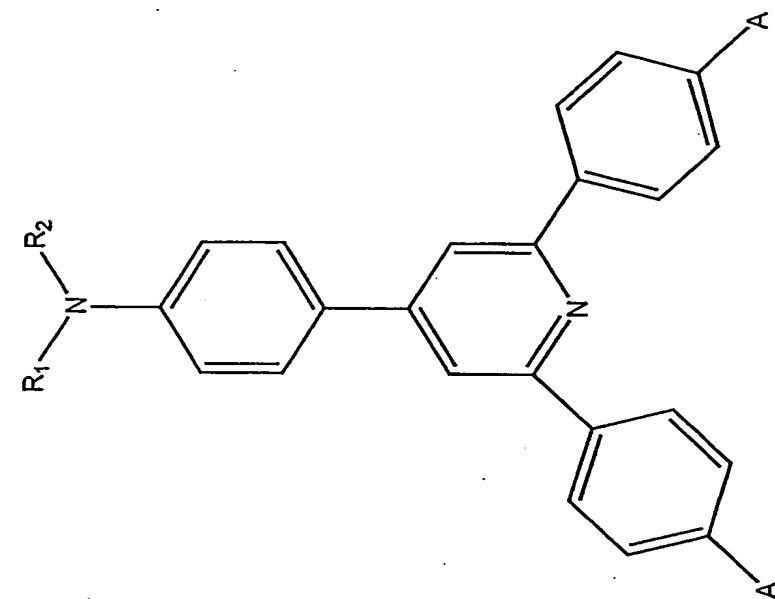


Figure 14A

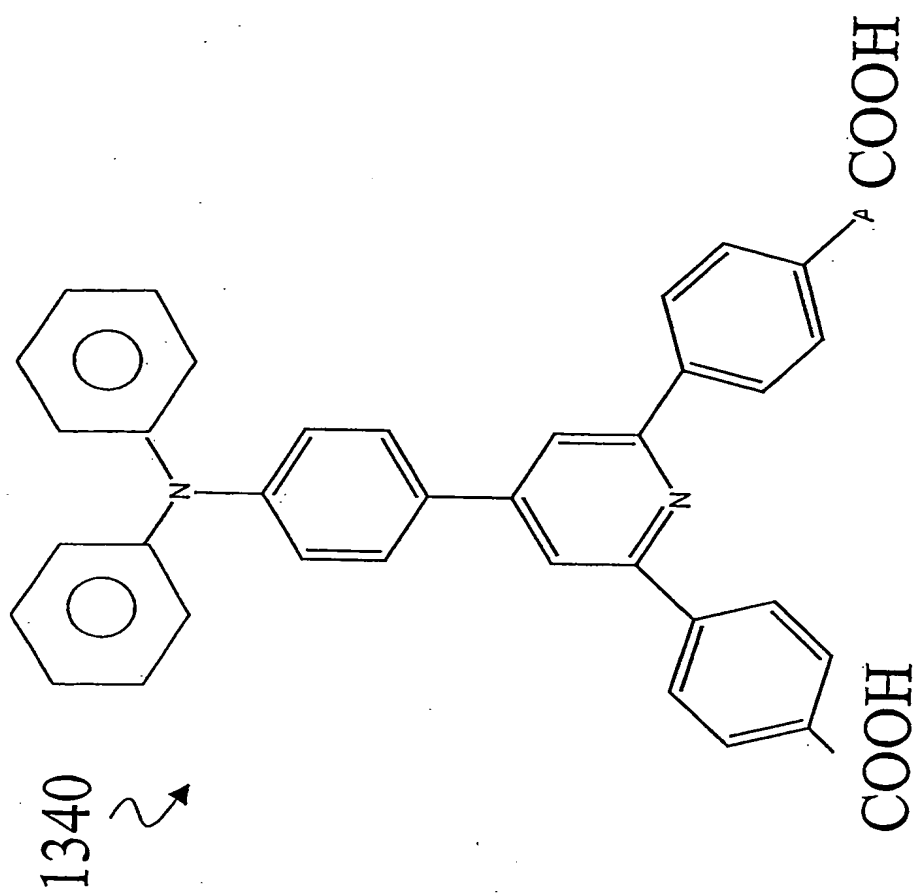


Figure 14B

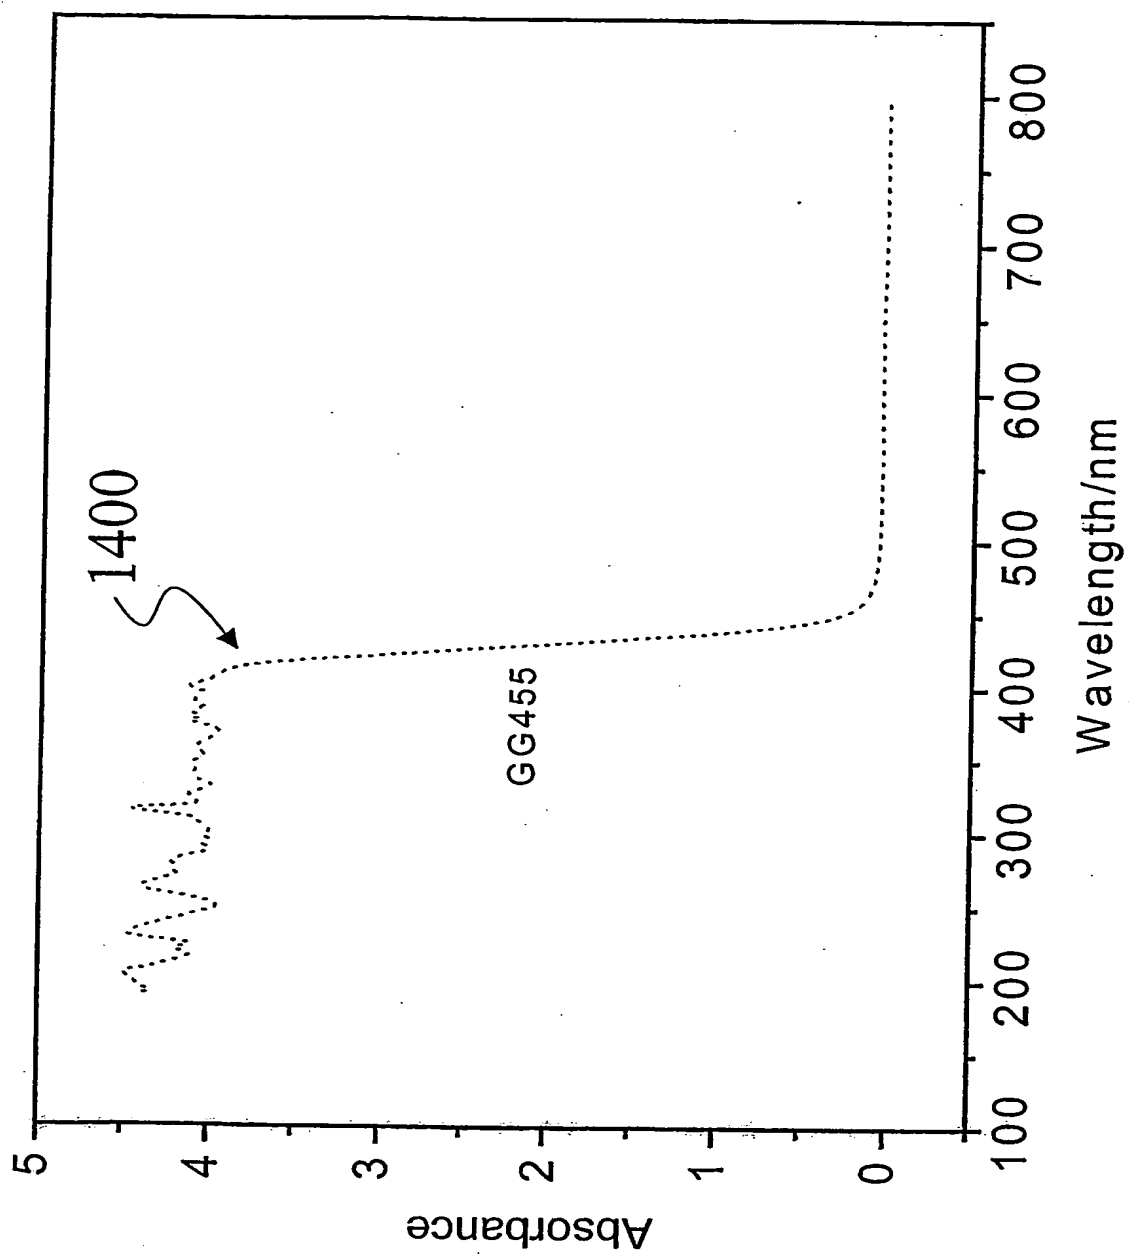


Figure 15

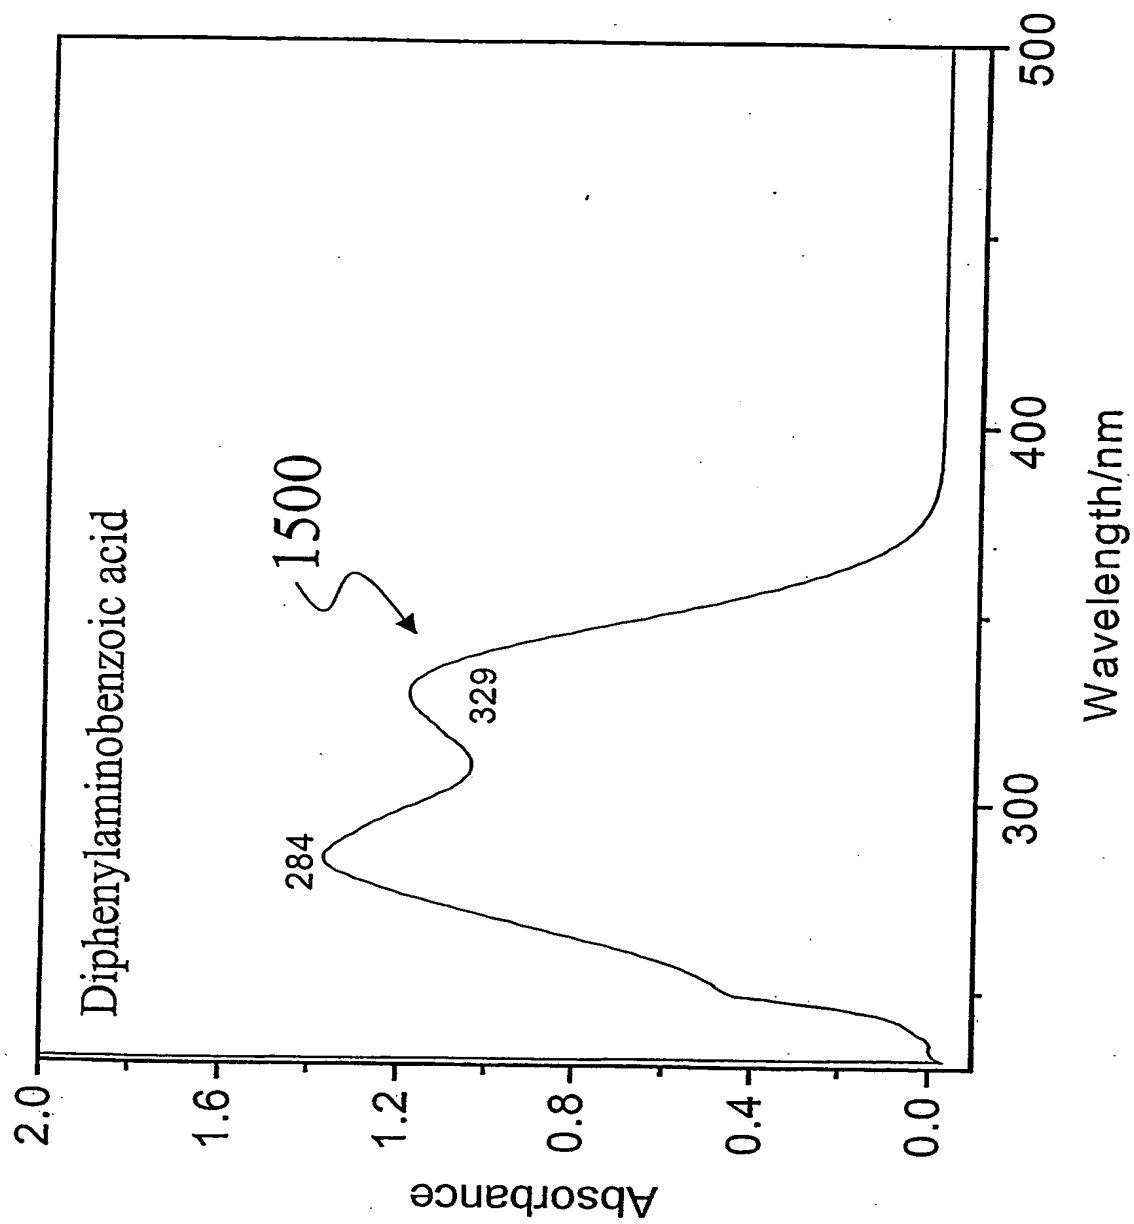


Figure 16

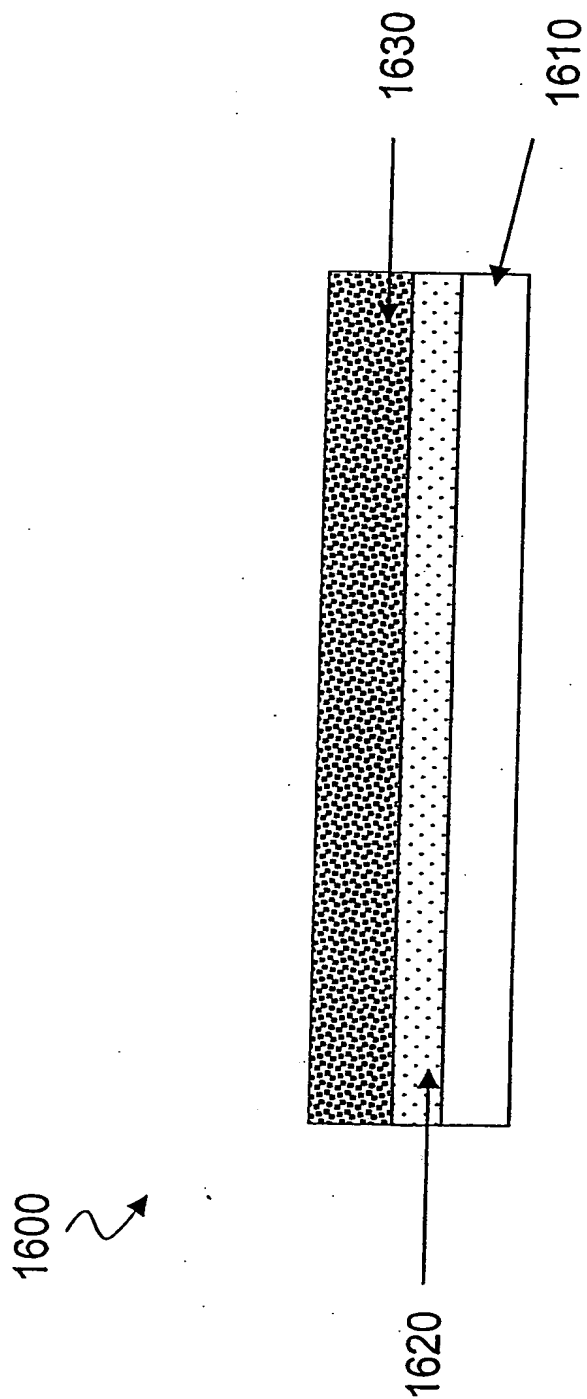


Figure 17